

Ultramax® WASHLET®+ S7A Low Profile One-Piece Toilet - 1.28 GPF

FEATURES

- Concealed supply connection for seamless installation
- High-efficiency TORNADO FLUSH® system - 1.28 GPF (4.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Decorative one-piece design with low-profile tank
- Universal Height
- Chrome plated trip lever
- 12" Rough-in
- Elongated front bowl and WASHLET+ S7A set
- Touchless auto open/close lid
- EWATER+® auto-cleans wand and bowl after every use
- PREMIST® automatically mists the bowl before each use
- Self-cleaning wand cleans itself inside and out before and after every use
- CLEAN RESIN® keeps wand and seat cleaner, more hygienic, and effortless to maintain
- Multifunction pearl white remote control with personalized memory settings for up to 4 users
- Night light illuminates the side and the inside of the bowl

MODELS

- **MW6184736CEFG (#01)**
With CEFIONTECT ceramic glaze, WASHLET+ S7A with contemporary design
 - **CST618CEFGAT40**
Elongated bowl with CEFIONTECT
 - **SW4736AT40**
WASHLET+ S7A

OPTIONAL COMPONENTS

- **THU808(#01, #BN, #PN, #PB, #RB, #MBL)-A**
Trip Lever (Cotton, Sedona Beige, Ebony, Brushed Nickel, Polished Nickel, Polished Brass, Oil Rubbed Bronze, Matte Black)

COLORS/FINISHES

- #01 Cotton



TORNADO FLUSH



UNIVERSAL HEIGHT



CEFIONTECT



EWATER+

PRODUCT SPECIFICATION

The one-piece high-efficiency TORNADO FLUSH system toilet shall be 1.28 GPF/4.8 LPF. Toilet shall be 12" rough-in. Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have low-profile tank, elongated front bowl with SoftClose seat, and Polished Chrome trip lever. Toilet shall be TOTO Model MW6184736CEFG__#01.

See **SW4736AT40 Specification Sheet** for details on included WASHLET.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



MW6184736CEFG

Ultramax® WASHLET®+ S7A Low Profile One-Piece Toilet - 1.28 GPF

SPECIFICATIONS


Water Use	1.28 GPF (4.8 LPF)
Flush System	TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	9" x 7"
Trap Diameter	2"
Rough-in	12"
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	CST618CEFGAT40: 99 lbs SW4736AT40: 15 lbs
Shipping Dimensions	CST618CEFGT40 30" L x 19" W x 29-5/8" H1 x 18-1/2" H2 SW4736AT40 23-3/8" L x 17-5/8" W x 6-1/4" H

See SW4736AT40 Specification Sheet for details on included WASHLET.

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

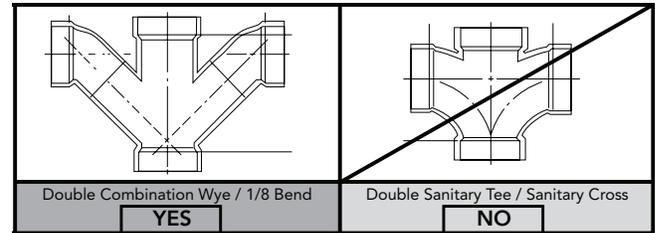

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

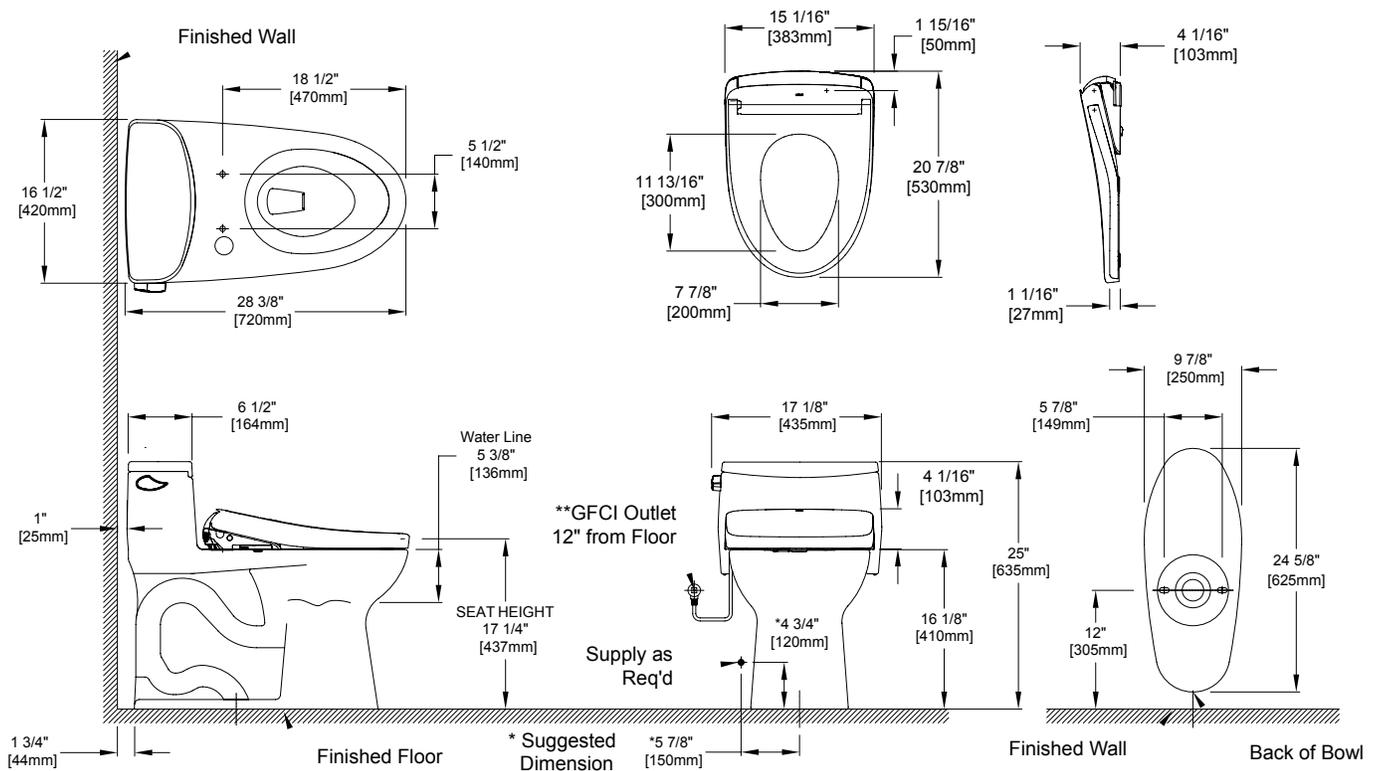

TOTO

These dimensions and specifications are subject to change without notice