

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	07/23/10	TRC

ENGINEERING DATA

ELECTRICAL:

FREQUENCY RANGE: DC TO 40 GHz
VSWR MAX: 1.15:1

MECHANICAL:

INTERFACE PER IEEE 287

MATERIAL:


HOUSING/COUPLING NUT: STAINLESS STEEL
CONTACTS: BERYLLIUM COPPER
SUPPORT BEAD: PEI


FINISH:

HOUSING/COUPLING NUT: PASSIVATED
CONTACTS: GOLD PLATED

NOTES:

1. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

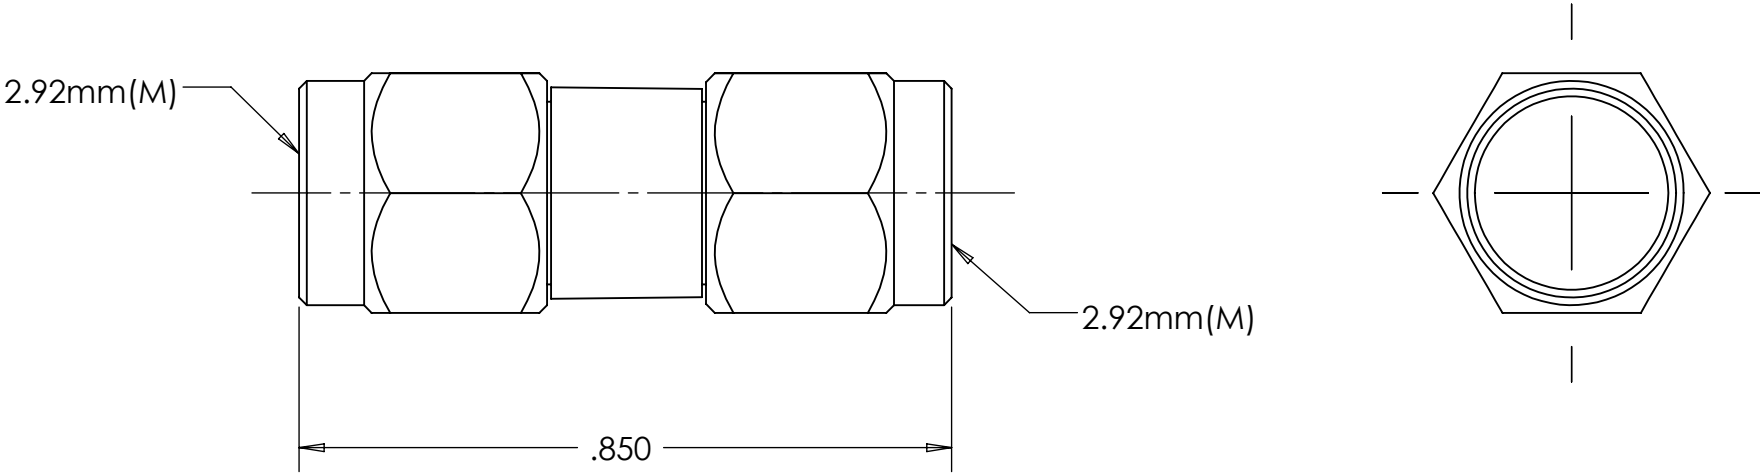

MATERIAL		DO NOT SCALE DRAWING		DRAWN TRC	DATE 07/16/10	TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01960 The Custom Interconnect Leader™	
		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		ENG APPR. TRC	DATE 07/21/10		
		TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±1/2°		MFG APPR. DF	DATE 07/21/10		
		MACHINED SURFACES: 		OTHER APPR. AM	DATE 07/20/10		
COMMENTS:		THIRD ANGLE PROJECTION 		SIZE B	DWG. NO. TRU-11233		REV -
surface area: sq inch		weight: lbs		CAGE CODE: 92180		SCALE: 4:1	SHEET 1 OF 1