



ASSEMBLY / INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards.

If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions. Tools are required when installing this fixture.

REQUIRED TOOLS

Phillips Screwdriver

ASSEMBLY AND INSTALLATION


There are two options for you to install the lamp:

Option 1--Portable wire installation:

Turn off the power at fuse or circuit breaker

1. Carefully unpack the fixture, lay out all parts on a clean surface.
2. Screw STEM A onto the WALL PLATE, screw STEM B onto STEM A.
3. Fasten the MOUNTING RING onto the OUTLET BOX by using 2 OUTLET BOX SCREWS provided.
4. Place WALL PLATE over the MOUNTING SCREWS, then secure them with LOCK NUTS until tightened.
5. Place the GLASS SHADE over the socket and secure it with the SCREWS tightly.
6. Install the BULB (Not included).
7. If angle adjustment is required, please unfasten the KNOB and adjust the arm to the desired position.

Turn on the power at fuse or circuit breaker.

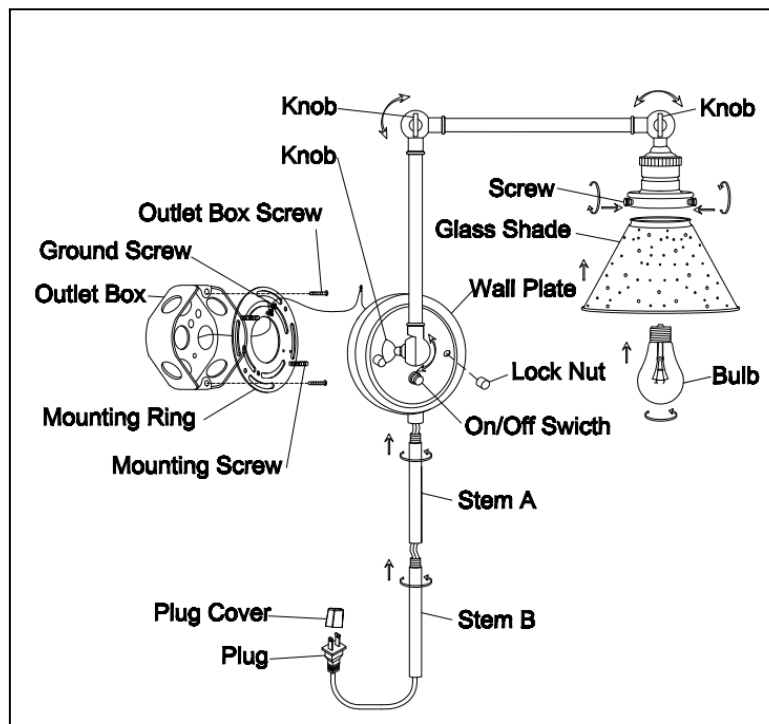

ITEM# 589077-BLK / 589077-SG

*IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
CONSULT A LICENSED ELECTRICIAN.*


Customer Service: 1-800-558-8700

Option 2--Fixed wire installation:

Turn off the power at fuse or circuit breaker

1. Carefully unpack the fixture, lay out all parts on a clean surface.
2. Cut off the wire at 6" length by wire cutters as Fig.and pull the 6" wire out of inside the wall plate.
3. Remove the CONNECTION PART and PUT the PLASTIC COVER onto the hole of wall plate.
4. Fasten the MOUNTING RING onto the OUTLET BOX by using 2 OUTLET BOX SCREWS provided.
5. Tie ground wire from OUTLET BOX and from fixture to the GROUND SCREW on the Mounting Ring. Connect ribbed wire without writing from fixture to white wire (neutral wire) from supply circuit. Connect smooth wire with writing from fixture to black wire (live wire) from supply circuit. Cover connections using provided WIRE CONNECTORS.
6. Place WALL PLATE over the MOUNTING SCREWS, then secure them with LOCK NUTS until tightened.
7. Place the GLASS SHADE over the socket and secure it with the SCREWS tightly.
8. Install the BULB (Not included).
9. If angle adjustment is required, please unfasten the KNOB and adjust the arm to the desired position.

Turn on the power at fuse or circuit breaker.

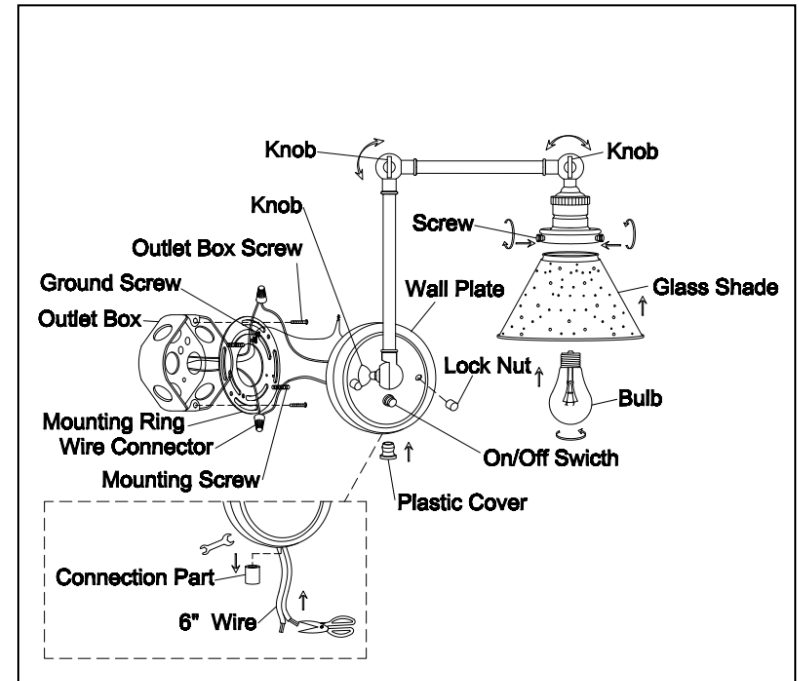

ITEM# 589077-BLK / 589077-SG

*IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
CONSULT A LICENSED ELECTRICIAN.*

Customer Service: 1-800-558-8700