


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

2025-38-9

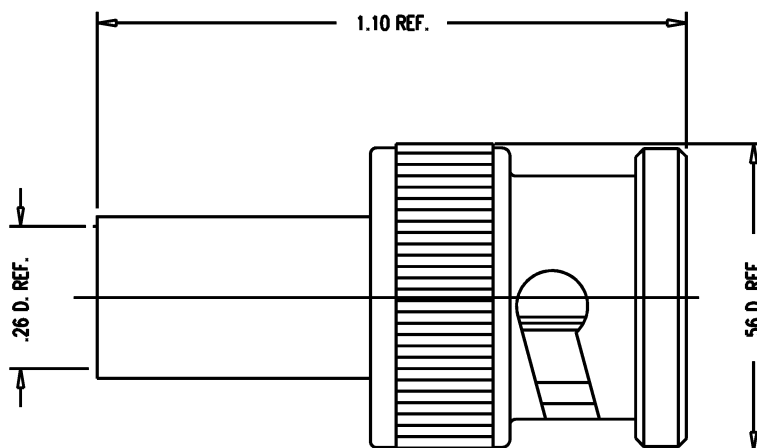

STAMP: KINGS 2025-38-9

NOTES:

1. FOR USE WITH BELDEN 9209 & 8279 CABLES.
2. FOR CABLING INSTRUCTIONS SEE 3-117.
3. FOR CABLE TRIMMING USE KTJ-134 & KTD-224.
4. FOR CRIMPING USE DIE KTH-2002.
5. INTERFACE PER KINGS ES-17, FIG. 6.
6. CENTER CONTACT TO BE SUPPLIED UNASSEMBLED.
7. MATERIALS:
INSULATOR: TEFLON, ASTM-D-1457
GASKET: SIL. RUB., ZZ-R-765
OUTER CONTACT: BER. COP., ASTM-B-196
ALL OTHER PARTS: BRASS, QQ-B-626
8. FINISHES:
SPRING WASHER: SILVER PLT. PER QQ-S-365
CENTER CONTACT: HARD GOLD PLT. PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
9. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 75 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 2 GHz

REVISIONS

ISSUE	CHANGES
0	ER 32852 JCA 02/15/91
1	CN 37034 D JJS 06/28/96

JCA1366

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, 75 BNC

DRAWN JCA DATE 06/28/96

DESIGN GA DATE 06/28/96

APPR. DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

2025-38-9

GSD