

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL SPECIFICATIONS:

OUTER CONTACT: COPPER ALLOY
ALL OTHER METAL PARTS: BRASS PER ASTM B16
INSULATORS: TEFLON PER ASTM D1710
O-RINGS: SILICONE RUBBER PER A-A-59588

2. FINISH SPECIFICATIONS:

CENTER CONTACT: .000050 MIN GOLD PER ASTM B488
OVER .000050 NICKEL OVER COPPER FLASH
ALL OTHER METAL PARTS: .000200 MIN BRIGHT SILVER OVER .000020 MIN COPPER PER ASTM B734



3. ELECTRICAL SPECIFICATIONS:

WORKING VOLTAGE: 400 VRMS

4. DESIGNED FOR USE WITH M17/176-00002 CABLE.

5. FOR CABLING INSTRUCTIONS, SEE 3-395.

REV	DESCRIPTION	BY DATE	APPD
04	ER33067	KFL 5/27/11	DCam

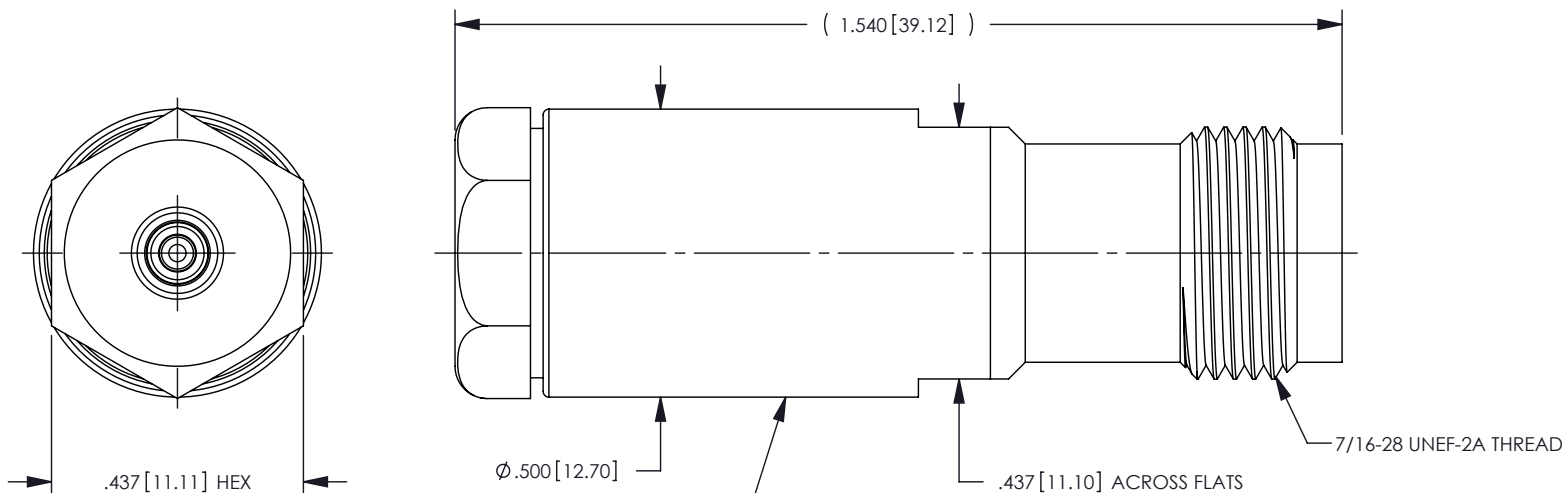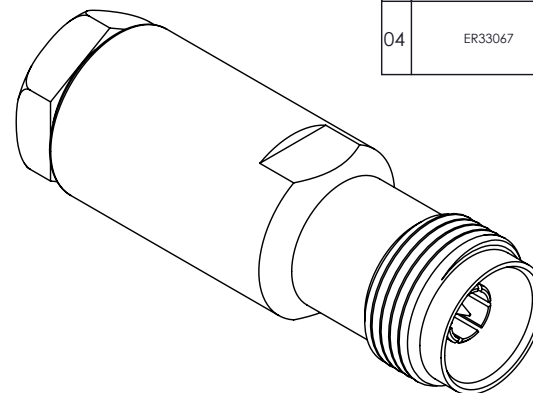

MARK: KINGS 1953-700-17601S (DATE CODE)

CATALOG P/N: 1953-700-17601S

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] $\pm$.01 [0.3] .XXX [X.XX] $\pm$.005 [0.13] .XXXX [X.XXX] $\pm$.XXXX ANGLES: $\pm$ 2° SCALE: 3:1				KINGS® by WINCHESTER Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492			
CUSTOMER SALES DRAWING				TRT JACK, BULKHEAD REVERSE POLARITY			
DRAWN	DATE	APPROVED	DATE	THIRD ANGLE	A SD1953-700-17601S		
PSM	01/04/11	DCam	01/04/11				
APPROVED	DATE	APPROVED	DATE		SHT	OF	REV
WPM	01/05/11	XXX	XX/XX/XX		1	1	04