

Flow•Max™

Positive Displacement 3-Chamber Fresh Water Pump



Fresh water when you want it and when you need it. The new Flow Max water pump delivers a steady flow of water to your RV. Compared to other water pumps on the market, Flow Max delivers superior pressure performance, averaging 50 PSI with an average 3.0 gallons per minute water flow (12V version). This is especially important on larger RVs that have extended plumbing running between the source point and the pump. Flow Max also features the quiet, disturbance-free operation campers need. Seeing is believing! Flow Max offers superior performance all at a price below similar products on the market today.


Accessory parts included




New, Quieter Operation

- Average 3.0 gallons per minute (GPM) flow - *Competition* averaged 2.36 GPM when independently tested*
- Average leading pressure of 50 PSI - *Competition* averaged 42 PSI when independently tested*
- Freeze/thaw tested up to five 2-hour cycles - *Competition's* housing cracked after one cycle*


Average Gallons Per Minute

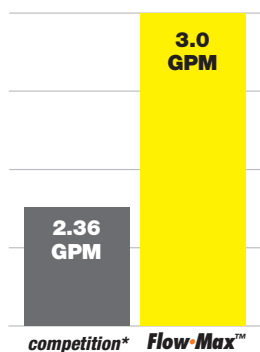

Average Leading Pressure

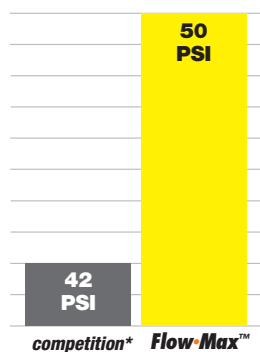

Freeze/Thaw 2-Hour Cycle

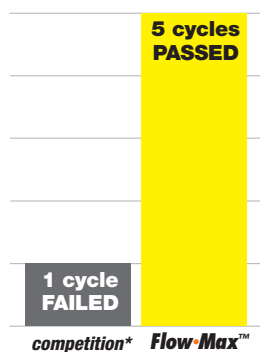

Features

- Self-priming
- Quiet operation
- 2-year limited warranty
- 12 VDC, 9.5 max amps
- Certified to NSF/ANSI 372 by CSA
- Heavy-duty, corrosion resistant motor
- Pump can run dry without incurring damage
- Includes standard strainer and connectors
- Available in 12V and 115V

12V

115V

CSA
CERTIFIED

part no.	description
689052	Flow Max Water Pump 12V with strainer and connectors
689054	Flow Max Water Pump 115V with strainer and connectors
689059	Replacement screen filter and connectors

* Compared to SHURflo® Revolution™ 4008 Fresh Water Pump. Independently tested by Progressive Engineering, Inc, Goshen, Indiana USA.



lippertcomponents.com