

USER'S MANUAL

CX154DVC

15" (381mm) DUAL 4 Ω VOICE COIL SUBWOOFER

BOSS[®]
AUDIO SYSTEMS

BOSS Audio Systems

3451 Lunar Court • Oxnard, CA 93030

www.bossaudio.com | 800.999.1236

tech support: www.bossaudio.com/support



0314

USER'S MANUAL

CX154DVC

15" (381mm)

DUAL 4 Ω VOICE COIL SUBWOOFER



BOSS[®]
AUDIO SYSTEMS



Technical Support

If you need technical support with your Boss Audio product or have questions about its use, please contact us:

805.751.4853

www.BossAudio.com

Congratulations on your purchase of the Boss Audio Phantom Series Subwoofer. Boss Audio takes great pride in producing products that look great, sound great, and stand up to the daily rigors applied by audio enthusiasts around the world.

Due to ongoing product development, specifications are subject to change without notice.




Enclosures

The CX154DVC will work in both sealed and ported enclosures. A sealed enclosure will yield a more linear response. A ported enclosure will roughly increase bass response about 3 – 6 dB.

Below you will find the dimensions to make the enclosure to suit the subwoofers needs, it has been designed for maximum output while retaining great sound quality.


The dimensions have already accounted for the volume displacement of the subwoofer, and using 3/4" (19mm) MDF. All dimensions are external.

Enclosure Dimensions

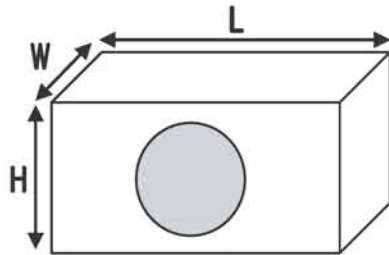

Sealed Dimensions:

Length (L) : 19.29" (490mm)
Width (W) : 16.1" (410mm)
Height (H) : 10.24" (260mm)
Cutout Diameter: 14.17" (360mm)

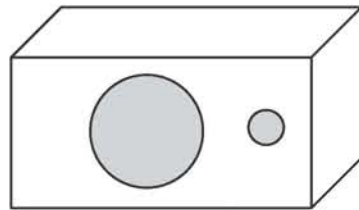

Ported Dimensions:

Length (L) : 21.65" (550mm)
Width (W) : 16.54" (420mm)
Height (H) : 11" (280mm)
Port Diameter : 4" (101.6mm)
Port Length : 7" (117.8mm)
Port Freq : 38 Hz
Cutout Diameter: 14.17" (360mm)



CX154DVC 15" (38.1cm) Subwoofer

- *Dual 4 Ω Voice Coils*
- *1800 W Peak Power Handling*
- *2-1/2" (64mm) High Temperature Voice Coil*
- *Butyl Rubber Surround*




Product Specifications

Impedance	8 Ω (Series)
Resonant Frequency	26 Hz
Qts	0.881
Qms	5.583
Qes	1.046
Vas	6.783 cu Ft. (192.1 liters)
Xmax	6.3 mm
Sensitivity (1 W/ 1 m)	86 dB
Peak Power Handling	1800 W
Mounting Depth	7-7/16" (189mm)
Cutout Diameter	14-3/16" (360mm)



Wiring your Subwoofer

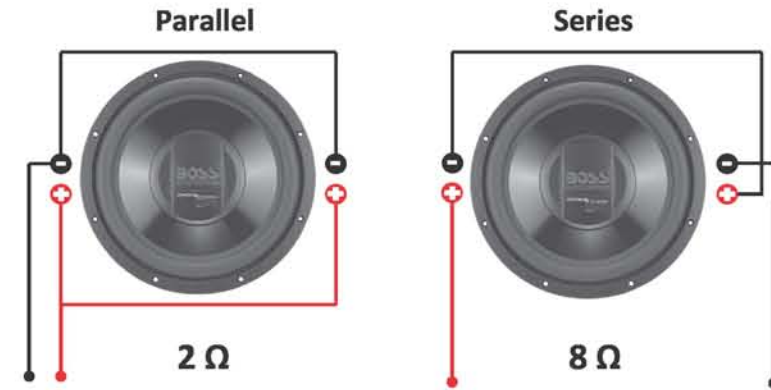

Multiple Subwoofers

