


In-Wall PEX Supports

PEXRite® Galvanized Flat Bracket with Keyed Holes

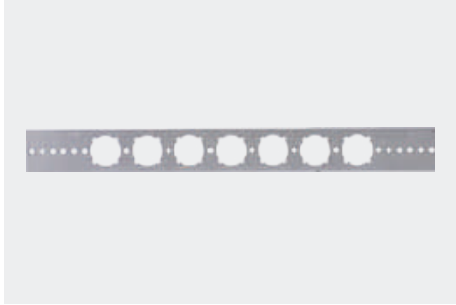

- Galvanized steel bracket with 1–3/8 in. keyed holes on 2 in. centers
- Versatile bracket ideal for sink, lavatory and toilet plumbing solutions
- Integrates with PEXRite #701, #702 or #704 with patented connection and other HoldRite inserts

Part number	Size	Pipe size	Box qty
103-18	20 in.	1/2 in., 3/4 in., 1 in. CTS	50
103-26	26 in.	1/2 in., 3/4 in., 1 in. CTS	50

PEXRite® Galvanized Pipe-on-Pipe Bracket with Keyed Holes



- Galvanized steel bracket with 1–3/8 in. keyed holes on 2 in. centers
- Versatile bracket ideal for sink, lavatory and toilet plumbing solutions
- Integrates with PEXRite #701, #702 or #704 with patented connection and other HoldRite inserts

Part number	Size	Pipe size	Box qty
110-R	2–1/8 in. x 1–1/8 in.	1/2 in., 3/4 in., 1 in. CTS	50

PEXRite® Galvanized Single Hole Bracket



- Attaches to framing or directly to HoldRite Stout Bracket™
- Galvanized steel bracket with 1–3/8 in. keyed hole
- Allows for 360-degree orientation when used with #701, #702 or #704 inserts
- Ideal for lavatory or toilet support

Part number	Size	Pipe size	Box qty
721	2–3/4 in. x 3–3/8 in.	3/8 in. - 1 in. CTS	50

PEXRite® Turn-Out PEX Support



- PEX turnout integrates with #103, #110-R, and #709 series brackets
- Can be installed directly to stud
- Reduces in-wall fittings and concealed joints
- Provide 360-degree turning radius
- Torch-free environment at stub-out location
- Compatible with all PEX tubing manufacturers

Part number	Size	Pipe size	Box qty
704	3–1/4 in. x 5–1/2 in.	3/8 in. - 1/2 in. CTS	100