

FEATURES & SPECIFICATIONS

INTENDED USE

For use with housings LC6, L7X, L7XR.

CONSTRUCTION

Antique bronze, Oil-rubbed bronze, brushed nickel and white finishes are one-piece aluminum open reflector with integral flange.

INSTALLATION

Socket to trim interface.

Trim retention is achieved by utilizing two side-mounted torsion springs on the trim and two receiving brackets in the can, ensuring a consistently tight fit with the ceiling.

LISTINGS

U.L. Listed to U.S. and Canadian safety standards.

Wet location listed when used with outdoor rated 75W PAR38 or 75W PAR30 short neck lamp.

WARRANTY

1-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Actual performance may differ as a result of end-user environment and application.


Note: Specifications subject to change without notice.

Catalog Number
Notes
Type

6" Finishing Trim

6H20

WETLITE
Drop Flange

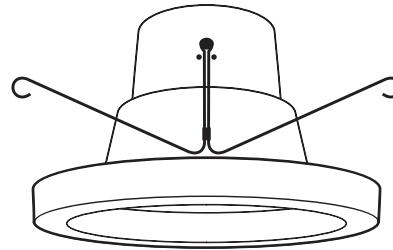

Lamp included with trim (75W PAR30)


Specifications

Height: 4-3/4 (12.1)

Lamp opening: 6-1/8 (15.6)

Diameter: 7-5/8 (19.4)

All dimensions are inches (centimeters) unless otherwise indicated.



ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: 6H20 TOR

6H20		TOR
Series	Finish	Mounting method
6H20	(blank) White MW Matte white ORB Oil-rubbed bronze BN Brushed nickel	TOR Torsion springs

Accessories: Order as separate catalog number.	
CRT6	6" goof ring, white

Housing Compatibility: Housing and trim ordered separately.			
Application	Source	Maximum wattage	Housing
IC	Incandescent	75 PAR38*	LC6, L7X, L7XR
		75 PAR30* (short neck)	
*Outdoor rated lamp only			

6H20 6" Wetlite Drop Flange Full Reflector Trim

For BR and PAR reflector lamps, see lamp manufacturer's published raw lamp data for photometrics.