

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	06/24/15	AM

ENGINEERING DATA

ELECTRICAL:

FREQUENCY RANGE: DC to 18 GHz
VSWR: 1.15:1 MAX

MECHANICAL:

N(f) INTERFACE PER MIL-STD-348
2.92mm(m) INTERFACE PER IEEE 287

MATERIAL:


BODY & COUPLING NUT - STAINLESS STEEL
CONTACT - BERYLLIUM COPPER
INSULATOR - PEI




FINISH:

BODY & COUPLING NUT -PASSIVATED
CONTACT - GOLD PLATED

NOTES:

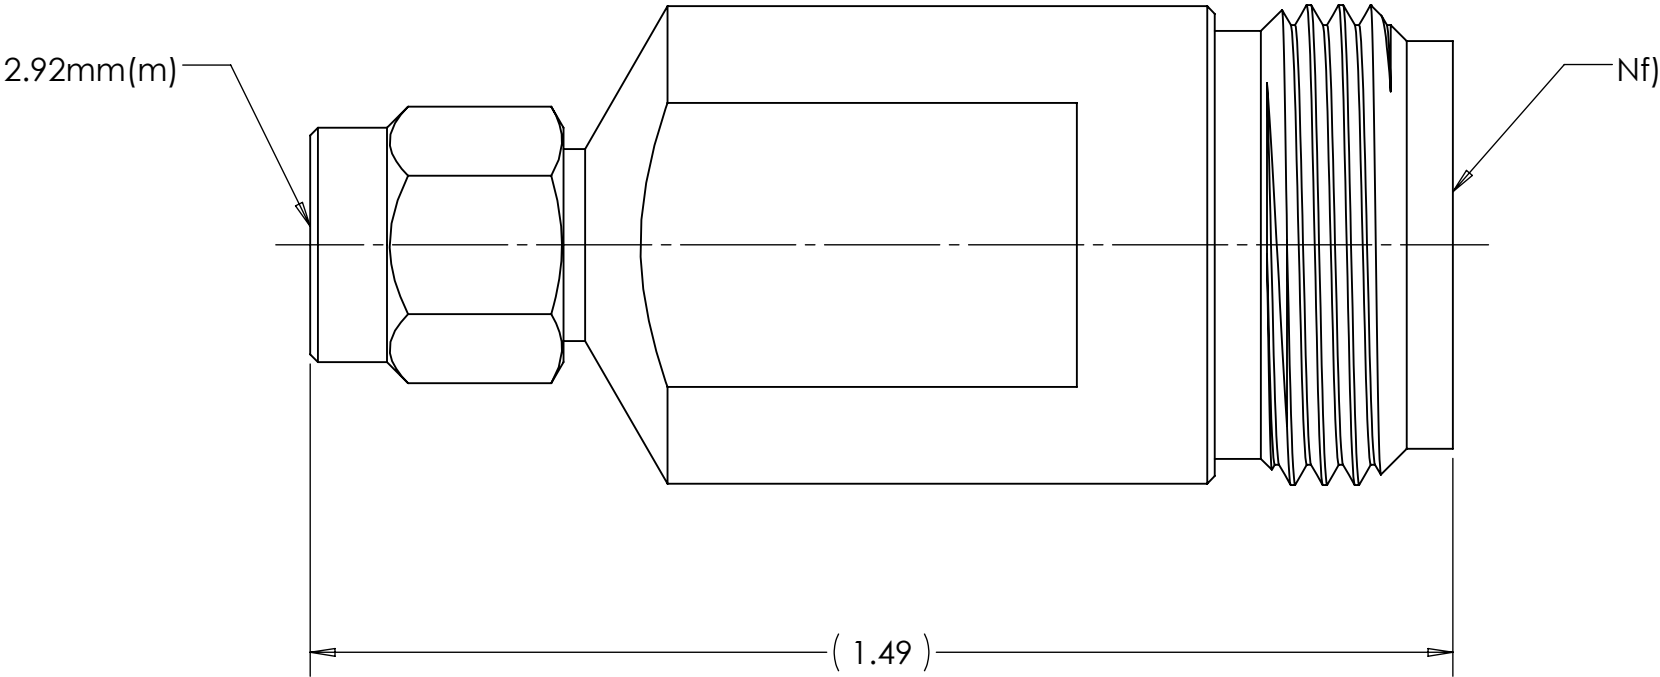1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.



MATERIAL	DO NOT SCALE DRAWING		DRAWN MVC	DATE 06/24/15	 a division of WINCHESTER CORPORATION TRU Corporation 245 Lynnfield St, Peabody, MA 01960			
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		ENG APPR. AM	DATE 06/24/15				
	TOLERANCES: FRACTIONS: ± 1/64 .XX : ± .01 .XXX: ± .005 ANGLES: ± 1/2° MACHINED SURFACES: 		MFG APPR.	DATE	TITLE: CONNECTOR, COAXIAL 2.92mm(m) to N(f) ADAPTER			
	COMMENTS:		OTHER APPR.	DATE				
surface area: sq inch		weight: lbs	THIRD ANGLE PROJECTION 		SIZE B	DWG. NO. TRU-13018		REV -
					CAGE CODE: 92180		SCALE: 4:1	SHEET 1 OF 1