


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

UG-943B/U

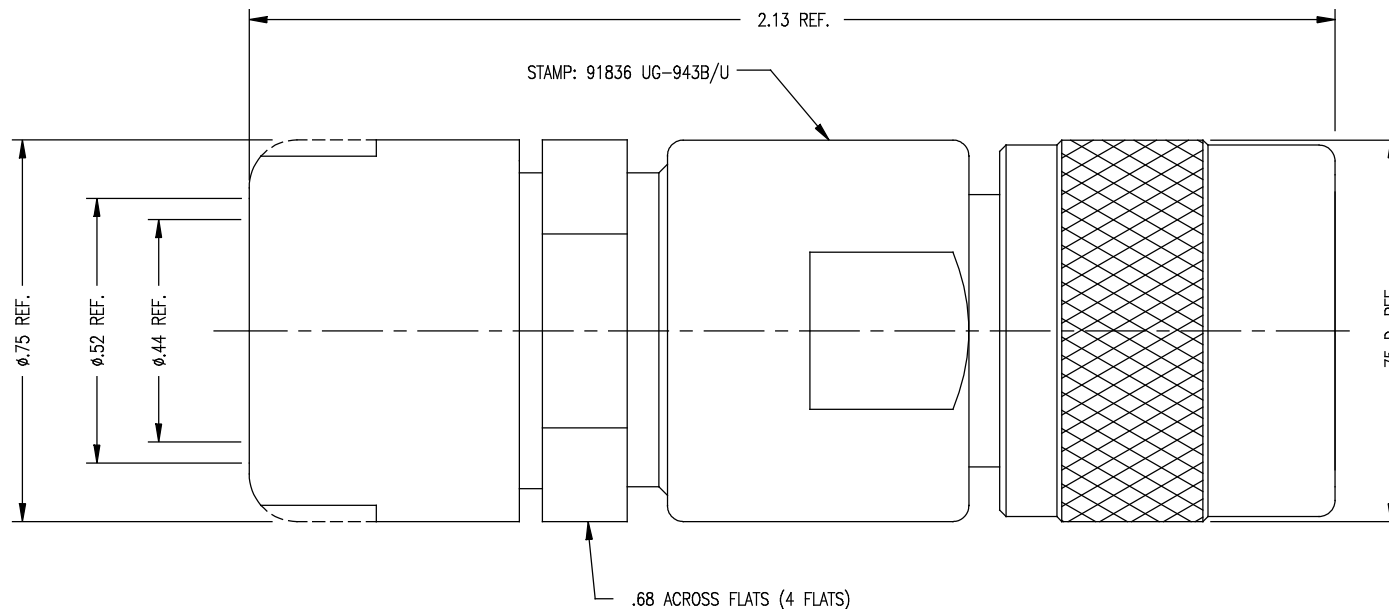

NOTES:

1. FOR USE WITH RG- 215 & 225/U CABLES.
2. FOR CABLE TRIMMING SEE CP-1022.
3. INTERFACE PER MIL-STD-348, FIG. 302-1.
4. MATERIALS:
 - INSULATOR: TEFLON, ASTM-D4894
 - GASKETS: SIL. RUB., A-A-59588
 - OUTER CONTACT: PHOS. BRONZE, ASTM-B103
 - ALL OTHER PARTS: BRASS, ASTM-B16
5. FINISHES:
 - ALL METAL PARTS: SILVER PLATE PER ASTM-B700
6. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - VOLTAGE RATING: 1000 VRMS
 - FREQUENCY RANGE: DC TO 11GHz

GSD

REVISIONS		
ISSUE	CHANGES	
4	CN 39926 C REDRAWN DCT 5/10/7	
SCALE 4:1		
APPROX SURFACE AREA		
KD-57-06		
USED ON		
REF: REB 49195A		
PLUG, C		
DRAWN	DCT	DATE 5/10/7
DESIGN		DATE
APPR.		DATE
 ELECTRONICS CO., INC. ROCK HILL, SOUTH CAROLINA 29730		
UG-943B/U		