

NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR USE WITH RG-178, 196, OR EQUIVALENT CABLE.

2. MATERIAL SPECIFICATIONS:

INSULATORS: PTFE

SPACER: DELRIN

OUTER CONTACT: BERYLLIUM COPPER

ALL OTHER METAL PARTS: BRASS

3. FINISH SPECIFICATIONS:

CONTACT: .000003 MIN THICK GOLD OVER .000050 MIN THICK NICKEL

ALL OTHER METAL: THIN GOLD OVER .000050 MIN THICK COPPER




4. ELECTRICAL SPECIFICATIONS:

IMPEDANCE: 50 OHMS



FREQUENCY RANGE: DC TO 3.0 GHz

5. CAP, SPACER AND FERRULE SHIPPED LOOSE

6. CRIMP FERRULE (.128 HEX) AND SOLDER TO CONTACT PIN.

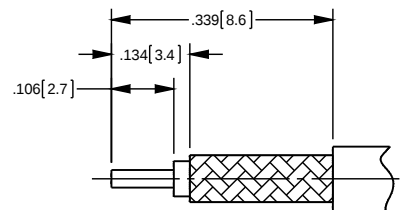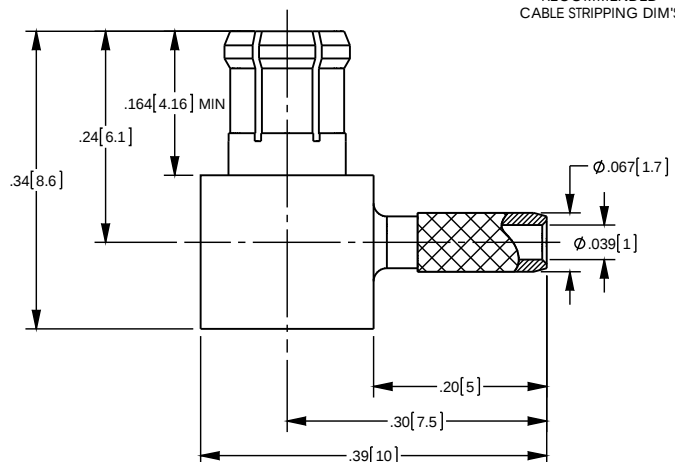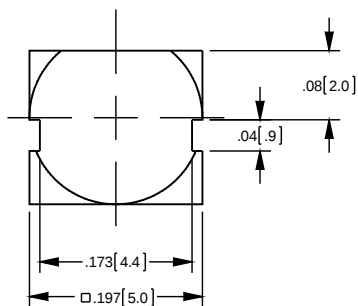

RECOMMENDED
CABLE STRIPPING DIM'S



CATALOG P/N: 1220A201M

PER ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]
TOLERANCES:
DECIMAL: .XX [XX] ± .01 [0.3]
XXX [XXX] ± .005 [0.13]
XXXX [XXXX] ± .000X

ANGLES: ± 2° SCALE: 6:1

CUSTOMER
SALES DRAWING



DRAWN	DATE	APPROVED	DATE
JL	07/15/2015	J	10/05/2015
APPROVED	DATE	APPROVED	DATE
JL	07/15/2015	XXX	XX/XX/XX

BOMAR

by WINCHESTER Winchester Electronics Corporation
199 Park Road Ext Suite 104
Middlebury, Connecticut 06762

MCX R/A CRIMP PLUG
(FOR RG-178, 196 CABLE)
(RoHS)

A	SD1220A201M	SHT	OF	REV
		1	1	A