


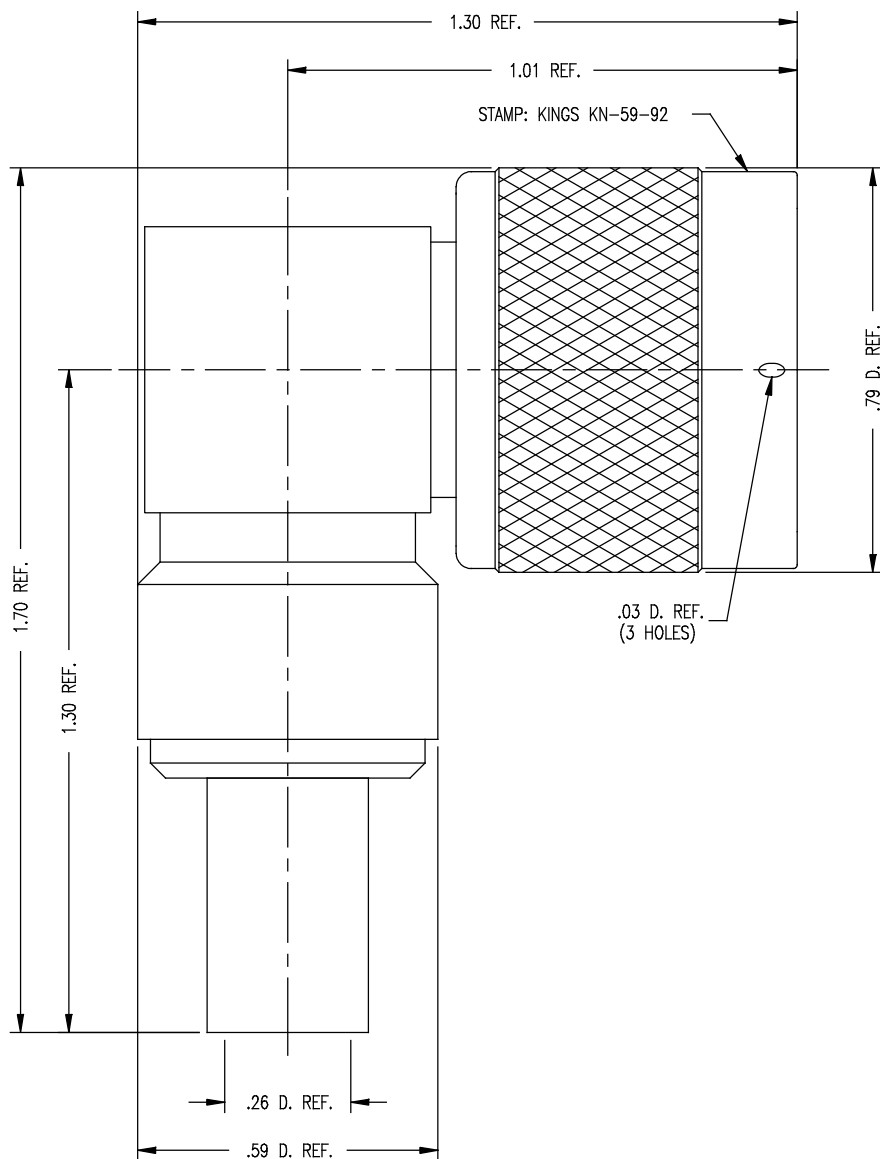

NOTES:

1. FOR USE WITH RG-59, 62 & 210/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-414.
3. FOR CRIMPING USE DIE KTH-2002.
4. INTERFACE PER MIL-STD-348, FIG. 304-1.
5. MATERIALS:
 - INSULATORS: TEFLON, ASTM-D-4894
 - GASKET: SIL. RUB., ZZ-R-765
 - K-GRIP SLEEVE: COM. BRONZE, ASTM-B-135
 - ANG CONACT: BER. COP., ASTM-B-196
 - C-RING } PHOS. BRONZE, ASTM-B-103
 - OUTER CONTACT }
 - ALL OTHER PARTS: BRASS, ASTM-B16
6. FINISHES:
 - ALL METAL PARTS: SILVER PLATE PER QQ-S-365
7. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - VOLTAGE RATING: 1000 VRMS
 - FREQUENCY RANGE: DC TO 11 GHz

SD

KN-59-92

REVISIONS

ISSUE	CHANGES
0	ER 12277 HJE 05/29/73
1	CN 37124 C REDRAWN KH 09/11/96

JCA2535

SCALE	4:1
APPROX SURFACE AREA	
USED ON	
REF:	
PLUG, ANGLE, N	
DRAWN	JCA
DATE	02/27/92
DESIGN	MJB
DATE	02/28/92
APPR.	
DATE	

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KN-59-92

SD