


Kitchen Sink Faucet (Single-Handle) Installation

- 1. Drill a Ø 1.3 Ø 1.38 hole, put the O-ring (2) into the groove of the faucet body bottom.
- 2. Put the faucet body (1) and all the hoses (6) through the hole on sink, then through the rubber gasket (3) and metal gasket (4), lock the nut (5) tighten it with the screw (7)
- 3. Connect the hose with the supply tube, left (red) for hot water, right (blue) for cold.

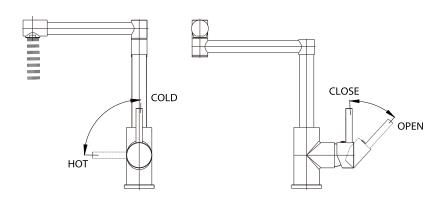

How to Use

- 1. Turn on the water supply valve, to check every joint if there is any leakage.
- 2. Pull the handle away from the faucet to start the water flow and push the handle towards the faucet to cut off the water flow.
- 3. Pull the handle towards yourself for hot water and away from yourself for cold water.