This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of Winchester Interconnect. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of Winchester Interconnect.

REV	DESCRIPTION	DATE	APPROVED
C	ER073243	09/05/18	DCAM

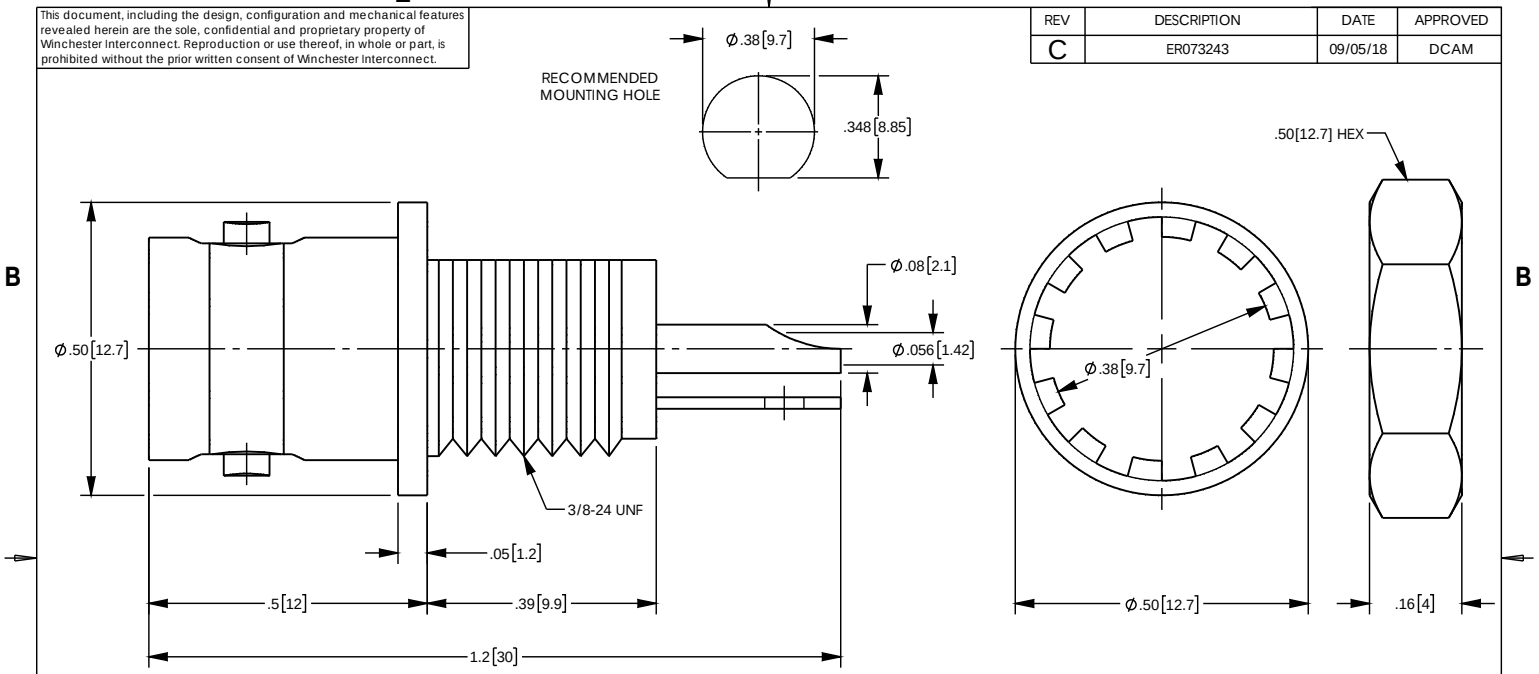

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL SPECIFICATIONS:
   CONTACT: PHOSPHOR BRONZE
   INSULATOR: NYLON
   LOCK WASHER: S50C
   ALL OTHER METAL PARTS: BRASS

2. FINISH SPECIFICATIONS:
   CONTACT: GOLD
   BRAID GROUNDING: BRIGHT TIN
   ALL OTHER METAL PARTS: NICKEL

3. ELECTRICAL SPECIFICATIONS:
   IMPEDANCE: 50 OHMS
   FREQUENCY RANGE: DC - 3.0 GHz

4. LOCK WASHER AND HEX NUT SHIPPED LOOSE.

5. MAX PANEL THICKNESS = .126[3.2].

6. A MAXIMUM TORQUE OF 12 IN-LB MAY BE APPLIED ON THE HEX NUT WHEN MOUNTING THE CONNECTOR IN THE PANEL.

CATALOG P/N: 326R515

DRAWN JI	DATE 09/05/2018	
APPR. DCAM	DATE 09/05/18	
APPR. XXX	DATE XX/XX/XX	
APPR. XXX	DATE XX/XX/XX	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]

TOLERANCES:
.X[X]: ±0.1[3]
.XX[X.X]: ±0.01[0.3]
.XXX[X.XX]: ±0.005[0.13]
ANGLES: ±2.0°

THIRD ANGLE PROJECTION

Winchester Interconnect

245 Lynnfield St
Peabody, MA 01960

TITLE: BNC BULKHEAD RECEPT. ISOLATED JACK (RoHS)

SIZE	DWG. NO.	REV
A	SD326R515	C
SH 1 OF 1		

DMF029_C