


4-Person Outdoor Patio Sectional with Cushions

TABLE OF CONTENTS

ASSEMBLY INSTRUCTIONS

Patio Deep Seating Left Arm Chair with Cushions	3
Patio Deep Seating Armless Chair with Cushions	8
Patio deep Seating Corner Chair with Cushions	13
Patio Deep Seating Right Arm Chair with Cushions	17
Combining Sofas	22

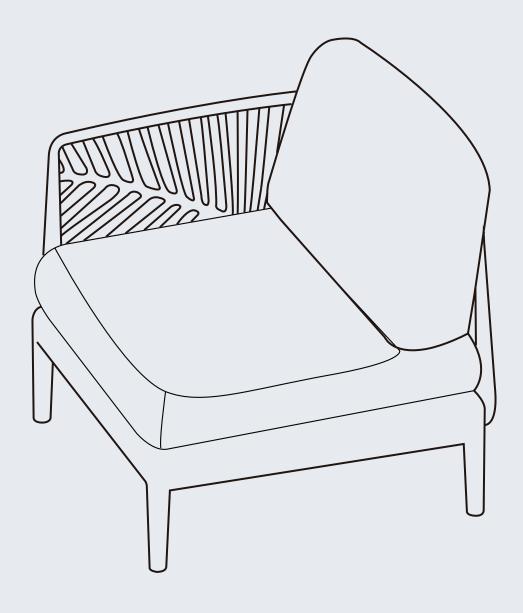

Patio Deep Seating Left Arm Chair with Cushions


(!) CARE & MAINTENANCE

Do not overtighten screws. (Insert all screws before tightening screws)


- Be careful when assembling to avoid damaging the surface.
- Clean the chair with lukewarm water, mild detergent & soft cloth.
- Firmly secure all bolts before use. Do not use any part of this item as a step ladder.
- Make sure that all bolts, screws, and nuts are secure every 90 days.
- Do not use or store this item in the proximity of open flame or flammable/combustible chemicals.
- Be aware that some parts are heavy and have sharp edges.
- Do not overtighten screws (insert all screws before tightening screws).




HARDWARE

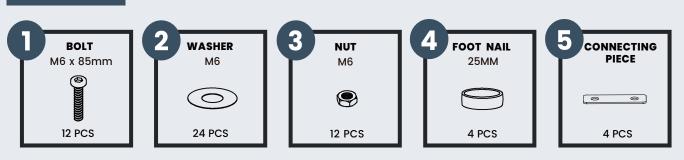


PARTS

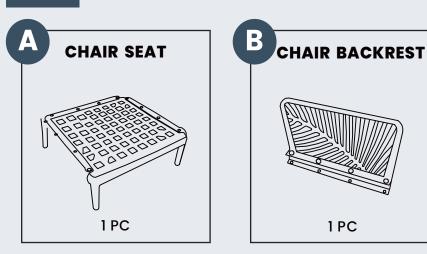




CUSHION

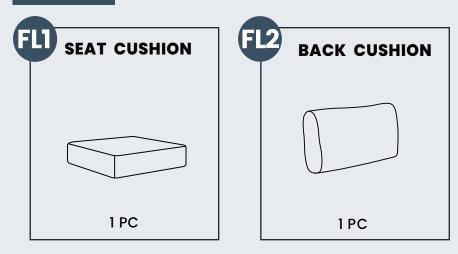

PRODUCT ASSEMBLY-OVERALL VIEW


Look at following overall view of this chair and learn the exact position of each part to be assembled.

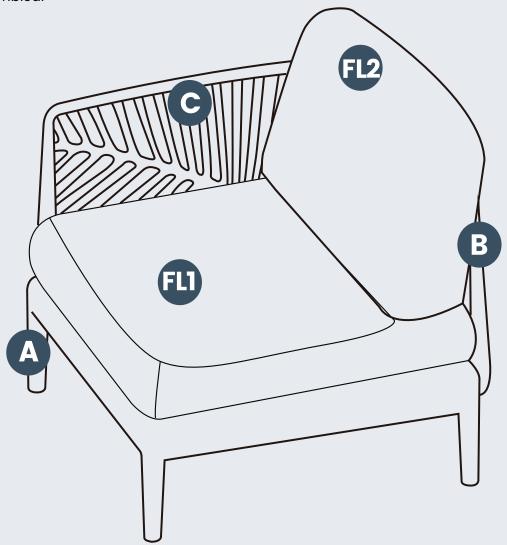



Attach Part B Backrest to Part A Chair Seat with 4 sets of Hardware (1pc of #1 Bolt + 2pc of #2 Washer + 1pc of #3 Nut) by using Allen Wrench & Socket Wrench.


Make sure to insert all bolts first, then tighten each one evenly to 100%.

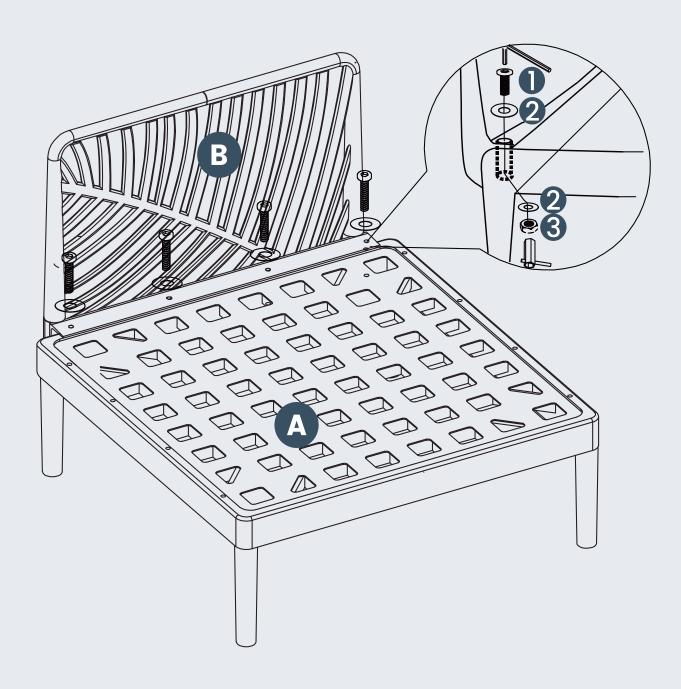

2

Attach 1pcs of Part C Chair Arm to Part A Chair Seat with 4 sets of Hardware (1pc of #1 Bolt + 2pc of #2 Washer + 1pc of #3 Nut) by using Allen Wrench & Socket Wrench.


Make sure to insert all bolts first, then tighten each one evenly to 100%.

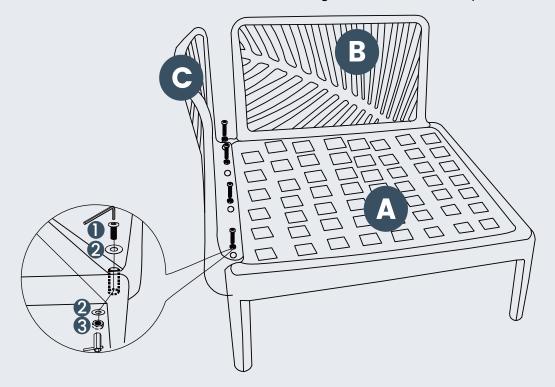


Insert 4pcs of **Hardware #4 Foot Nail** to the bottom of legs.

Put **Part FLI Seat Cushion** and **Part FL2 Back Cushion** on the seat.

Now enjoy your chair.



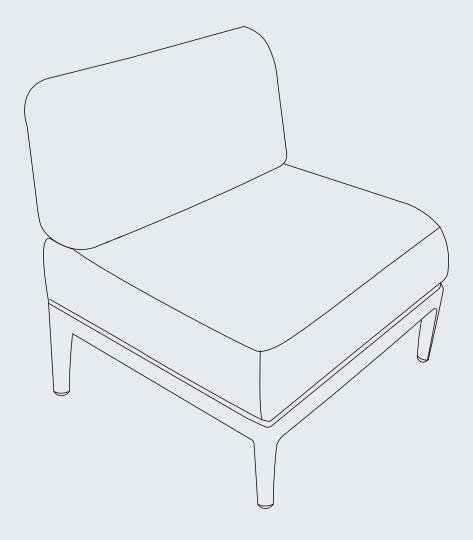

Patio Deep Seating Armless Chair with Cushions


(!) CARE & MAINTENANCE

Do not overtighten screws. (Insert all screws before tightening screws)


- Be careful when assembling to avoid damaging the surface.
- Clean the chair with lukewarm water, mild detergent & soft cloth.
- Firmly secure all bolts before use. Do not use any part of this item as a step ladder
- Make sure that all bolts, screws, and nuts are secure every 90 days.
- Do not use or store this item in the proximity of open flame or flammable/combustible chemicals.
- Be aware that some parts are heavy and have sharp edges.
- Do not overtighten screws (insert all screws before tightening screws).




HARDWARE

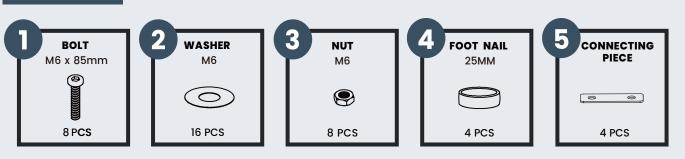

PARTS

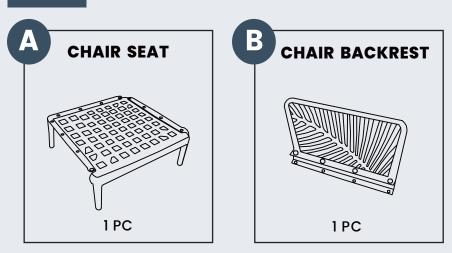


CUSHION

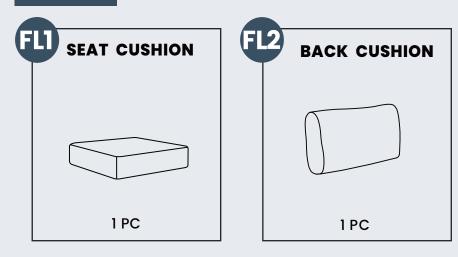

PRODUCT ASSEMBLY-OVERALL VIEW


Look at following overall view of this chair and learn the exact position of each part to be assembled.

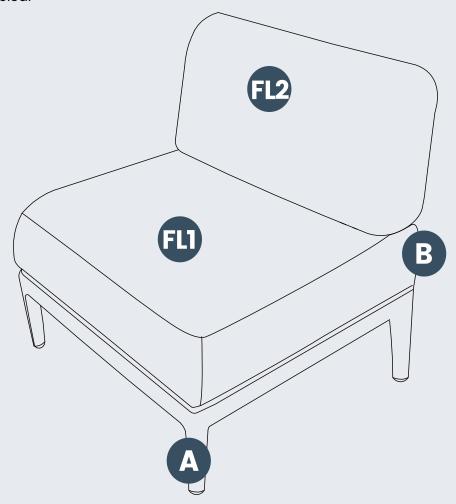



Attach Part B Backrest to Part A Chair Seat with 4 sets of Hardware (1pc of #1 Bolt + 2pc of #2 Washer + 1pc of #3 Nut) by using Allen Wrench & Socket Wrench.

Make sure to insert all bolts first, then tighten each one evenly to 100%.

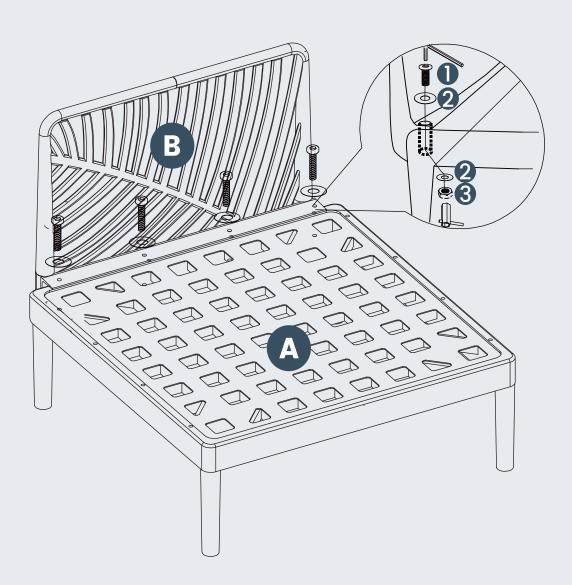





Insert 4pcs of **Hardware #4 Foot Nail** to the bottom of legs.

Put **Part FLI Seat Cushion** and **Part FL2 Back Cushion** on the seat.

Now enjoy your chair.

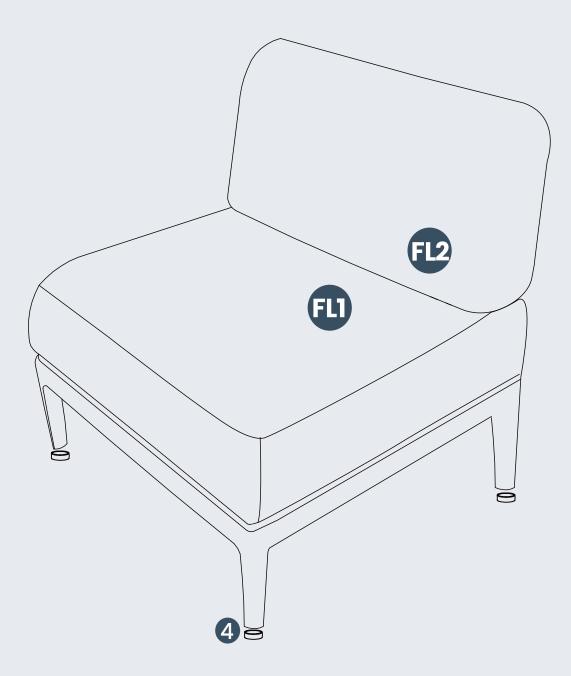

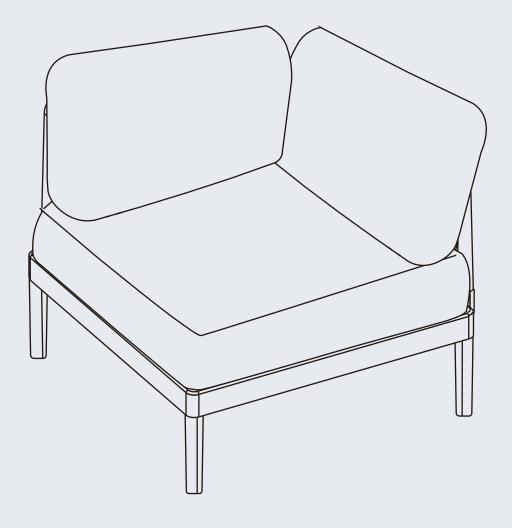

Patio Deep Seating Corner Chair with Cushions


(!) CARE & MAINTENANCE

Do not overtighten screws. (Insert all screws before tightening screws)


- Be careful when assembling to avoid damaging the surface.
- Clean the chair with lukewarm water, mild detergent & soft cloth.
- Firmly secure all bolts before use. Do not use any part of this item as a step ladder.
- Make sure that all bolts, screws, and nuts are secure every 90 days.
- Do not use or store this item in the proximity of open flame or flammable/combustible chemi
- Be aware that some parts are heavy and have sharp edges.
- Do not overtighten screws (insert all screws before tightening screws).




HARDWARE

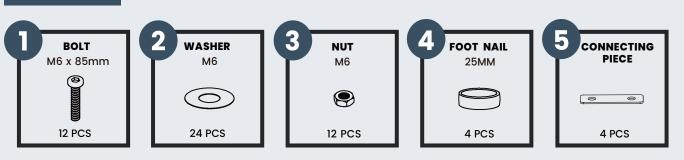

PARTS

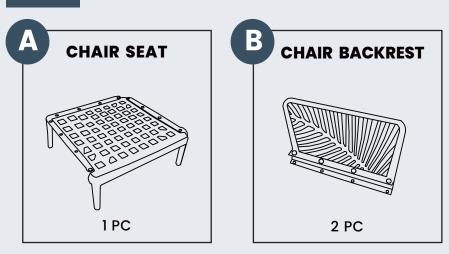


CUSHION

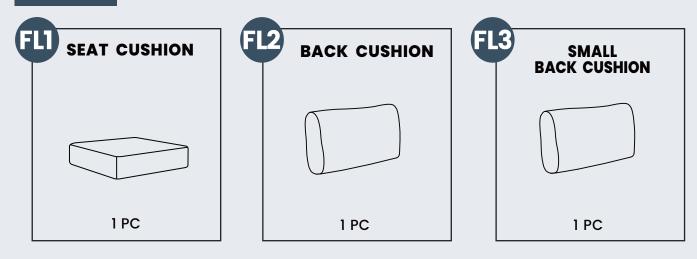


PRODUCT ASSEMBLY-OVERALL VIEW

Look at following overall view of this chair and learn the exact position of each part to be assembled.

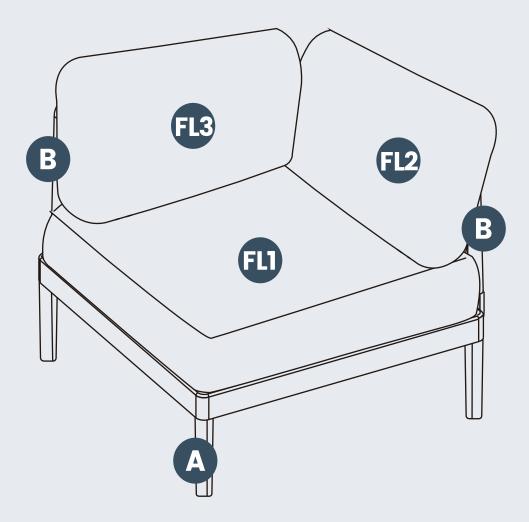




Attach 2 pcs of Part B Backrest to Part A Chair Seat with 8 sets of Hardware (1pc of # 1 Bolt+2pc of #2 Washer + 1pc of #3 Nut) by using Allen Wrench & Socket Wrench. Make sure to insert all bolts first, then tighten each one evenly to 100%.

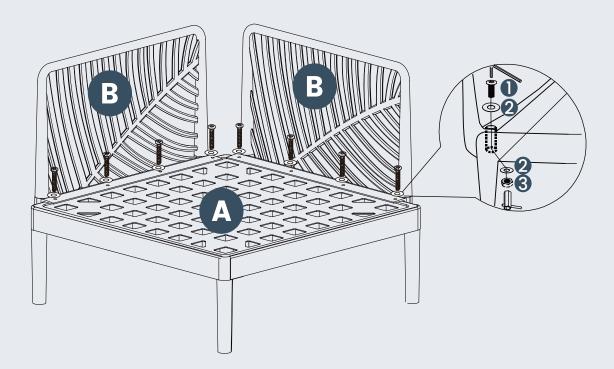


Insert 4pcs of **Hardware #4 Foot Nail** to the bottom of legs.

Put **Part FLI Seat Cushion**, **Part FL2 Back Cushion** and **Part FL3 Back Cushion** on the seat.

Now enjoy your chair.

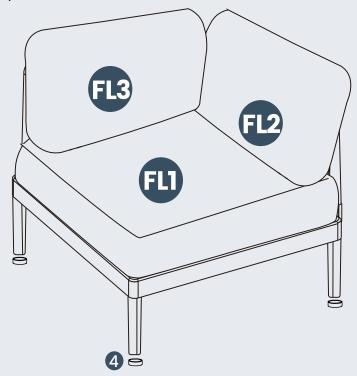

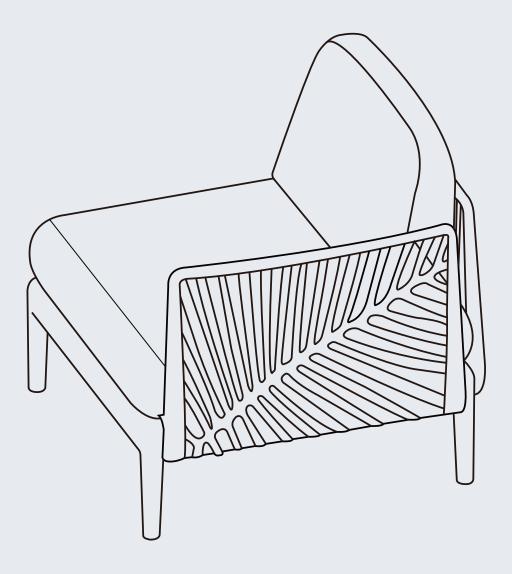

Patio Deep Seating Right Arm Chair with Cushions

(!) CARE & MAINTENANCE

Do not overtighten screws. (Insert all screws before tightening screws)

- Be careful when assembling to avoid damaging the surface.
- Clean the chair with lukewarm water, mild detergent & soft cloth.
- Firmly secure all bolts before use. Do not use any part of this item as a step ladder.
- Make sure that all bolts, screws, and nuts are secure every 90 days.
- Do not use or store this item in the proximity of open flame or flammable/combustible chemicals.
- Be aware that some parts are heavy and have sharp edges.
- Do not overtighten screws (insert all screws before tightening screws).










CAPACITY






UP TO 30 MIN. ASSEMBLY


HARDWARE














PARTS








CUSHION

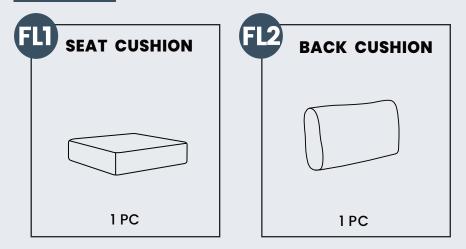

PRODUCT ASSEMBLY-OVERALL VIEW


Look at following overall view of this chair and learn the exact position of each part to be assembled.

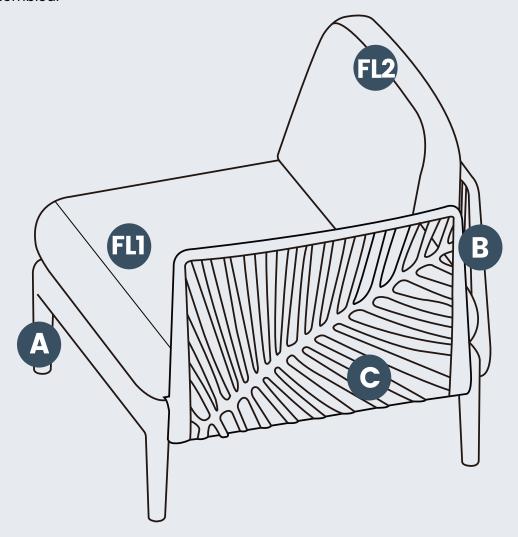



Attach Part B Backrest to Part A Chair Seat with 4 sets of Hardware (1pc of #1 Bolt + 2pc of #2 Washer + 1pc of #3 Nut) by using Allen Wrench & Socket Wrench.


Make sure to insert all bolts first, then tighten each one evenly to 100%.

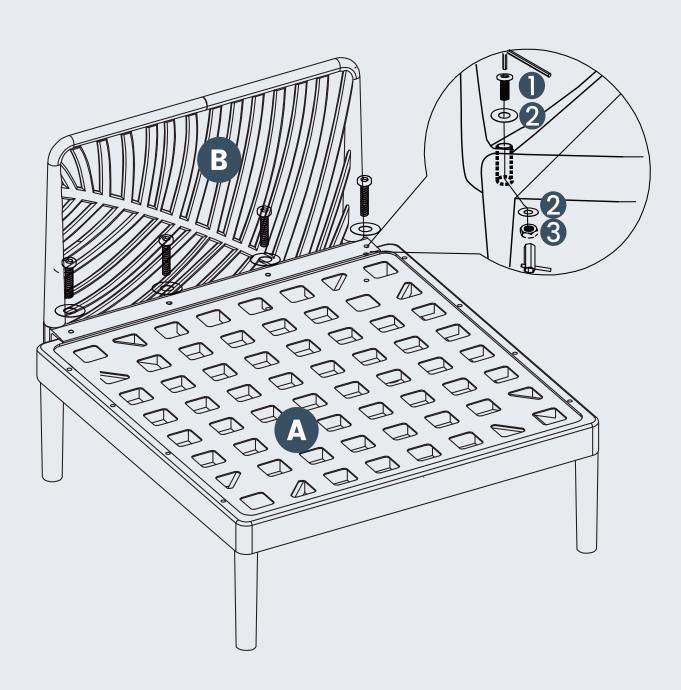

2

Attach 1pcs of Part C Chair Arm to Part A Chair Seat with 4 sets of Hardware (1pc of #1 Bolt + 2pc of #2 Washer + 1pc of #3 Nut) by using Allen Wrench & Socket Wrench.


Make sure to insert all bolts first, then tighten each one evenly to 100%.

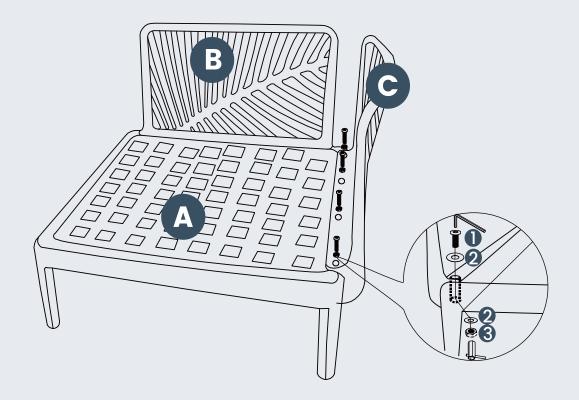

Insert 4pcs of **Hardware #4 Foot Nail** to the bottom of legs.

Put **Part FLI Seat Cushion** and **Part FL2 Back Cushion** on the seat.

Now enjoy your chair.






Installation of sectional sofa is shown as below if you purchase a set of sofa.

There are two connecting holes on side of **Part A Chair Seat**. Use 1 set of **Hardware**(2pcs of #5 Connecting Piece + 2pcs of #1 Bolt + 4pcs of #2 Washer + 2pcs of #3 Nut)

for each connecting hole to lock the chairs.

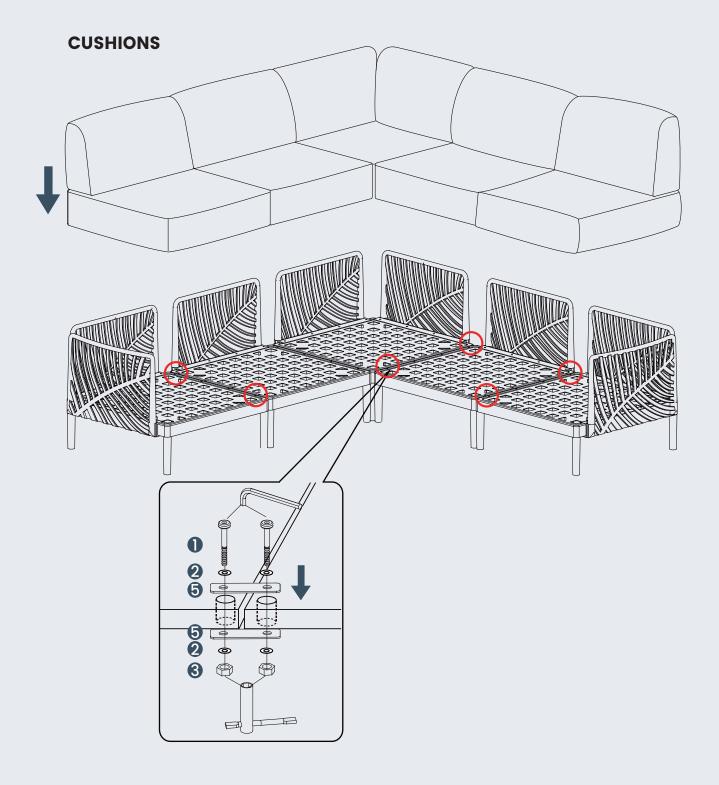

CLEANING TIPS

REGULAR CLEAN: Use a mixture of warm water and mild soap. Gently scrub the surface with a soft bristle brush to remove any dirt or stains.

QUICK CLEAN: You can simply wipe down the furniture with a damp cloth.

Regular cleaning not only preserves the aesthetic appeal of your furniture, but also helps extend its lifespan.