



DoorBird  
Technology meets Design.



**D2101KV**

## IP VIDEO DOOR STATION

For single-family houses and commercial buildings with 1 unit  
Keypad Module • 1 Call Button

Designed,  
developed and  
made in Germany

# ANSWER YOUR DOOR ANYWHERE.



## HOW DOES IT WORK

Imagine, you are not at home and your children have locked themselves out or the courier delivers a package. With DoorBird this is no longer a problem. Each time someone rings the doorbell you get a push notification on your smartphone or tablet. You can then not only talk to the visitor but also see him in HD quality. You will never miss a visitor again. With DoorBird you are on the go and still at home, even if a burglar presses the doorbell to check if someone is at home.

## SMART HOME STARTS AT THE FRONT DOOR

DoorBird is the smart solution for your door entrance. The IP Video Door Station can be used as a stand-alone unit or can be integrated into an existing Smart-Home platform. Even existing classic installations such as a door chime or an electric door and gate opener can still be used and controlled via the App.

## QUALITY MADE IN GERMANY

DoorBird is designed, developed and produced in Berlin, Germany. DoorBird's "Made in Germany" is not only a motto but a philosophy. All DoorBird IP Video Door Stations are manufactured and tested in Berlin to guarantee the highest quality, longevity and customer satisfaction.

## ADVANTAGES



### Open API

- Local interface for the integration with third-party systems and SIP



### Video and audio call

- On smartphones and tablets (iOS, Android) or landline phones (SIP)



### Smart Transmission Mode (STM)

- Real-time audio / video communication, optimized for mobile devices via WiFi, 3G, 4G, 5G




### Smart Home & ONVIF compatible

- Control4, Loxone, Crestron, Synology, QNAP, AVM FRITZ!fon, URC, RTI, ELAN, Fibaro, Bang & Olufsen and others



### Individual time and action plans, e.g.:

- RFID card „abc“ has only admission on Wednesday from 9 am until 11 am
- 4D motion sensor switches on external lamp between 9 pm and 6 am

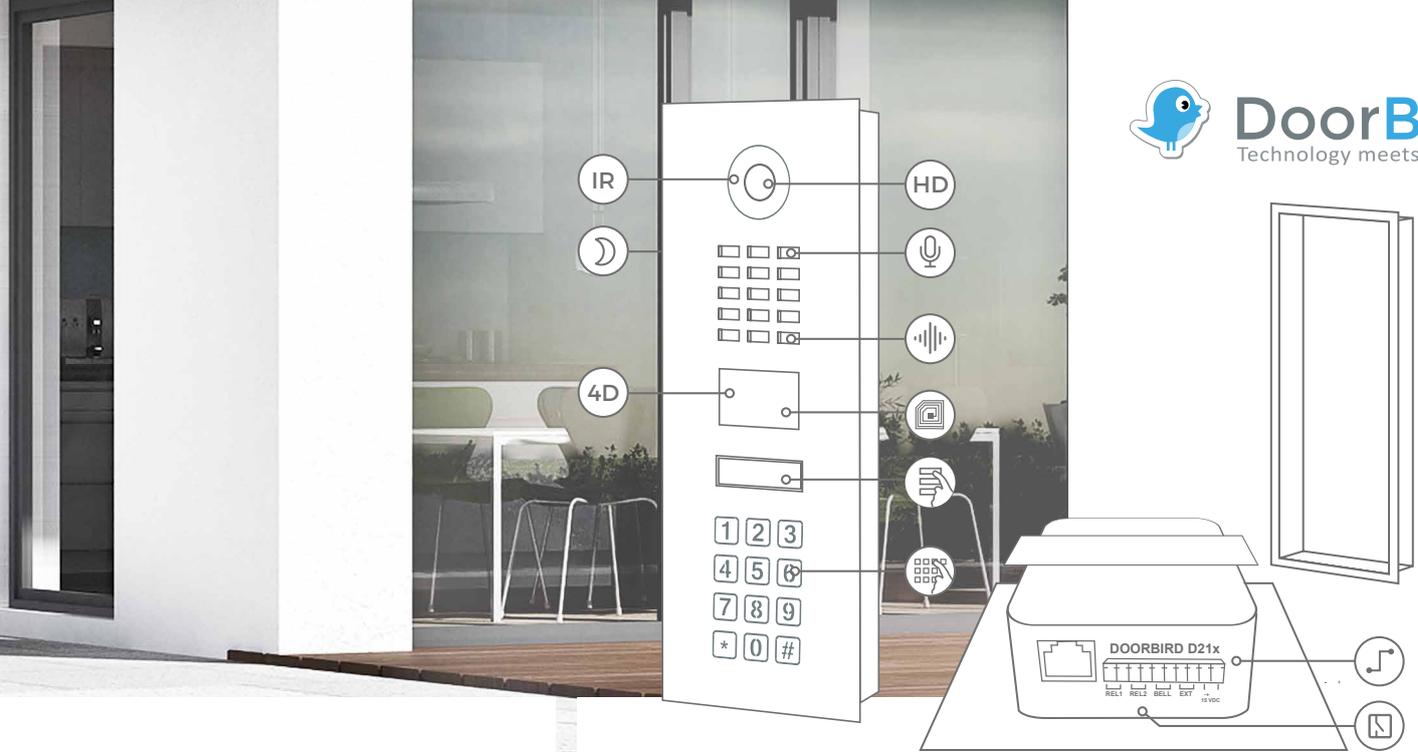

#### Automatic door opener

- For use in medical offices and office environments



#### Free cloud recording

- Can be optionally activated for visitor history



#### Geofencing

- Automatic door and gate opening when returning home



#### Burglary prevention

- Prevents more break-ins than an alarm system



#### Receive packages at any time

- Direct the delivery man e.g. to the neighbor or open the garage door via smartphone



#### Night vision

- With 12 IR LEDs



#### Light sensor

- For night vision mode



#### Motion sensor with 4D technology

- Distance up to 10 m adjustable via App (interval: 1 m)



#### HDTV Video

- Ultra-wide-angle, hemispheric lens, 180°



#### Echo and noise suppression (AEC, ANR)



#### RFID card reader

- Configurable remotely via App (e. g. schedules)



#### Call button

- With backlit nameplate



#### Keypad Module

- Configurable via App
- Individual PIN Codes
- Individual events (e.g.: a relay switch, push notification, ...)



#### Easy connection to the network

- Connection via RJ45 socket or bell wire via 2-wire transformer (PoE, network data)



#### Two freely configurable bi-stable switching relays

- Control two doors or gates via App
- Status configurable via App: Temporary or permanent circuit



## GENERAL

Front panel	3 mm (0.12 in) Available in brushed stainless steel V2A / V4A and with Bronze-Finish, V4A
Mounting housing (backbox)	Stainless steel
Mounting type	Flush-mounted, surface-mounting housing sold separately
Power supply	15 V DC (max. 15 W) or Power over Ethernet (PoE 802.3af Mode-A)
Call button	Plastic. Engravable metal nameplate sold separately, see <a href="http://www.doorbird.com/buy">www.doorbird.com/buy</a>
Nameplate	Illuminated
Keypad Module	12 keys, illuminated, configurable via App, e.g. <ul style="list-style-type: none"> <li>• Individual PIN codes</li> <li>• Individual events (e.g. switch a relay, HTTP(s) request)</li> <li>• Individual schedules</li> <li>• Up to 100 PIN codes manageable</li> </ul>
Weight	2040g
Connectors	<ul style="list-style-type: none"> <li>• RJ45, for LAN/PoE</li> <li>• Bi-stable latching relay #1, max. 1-24 V DC/V AC, 1 Ampere, e.g. for electric door opener</li> <li>• Bi-stable latching relay #2, max. 1-24 V DC/V AC, 1 Ampere, e.g. for electric door opener</li> <li>• Switch relays, max. 1-24 V DC / V AC, 1 ampere, e.g. for conventional door chimes</li> <li>• External input for external door opener button (potential-free)</li> <li>• 15 V DC input (+, -), max. 15 W</li> <li>• Relays can be expanded / detached with DoorBird I/O Door Controller</li> </ul>
Weather-proof	Yes, IP65
Approvals	CE, IC, FCC, RoHS, IP65, IK08
Dimensions	349,5 x 129 x 49,6 mm (H x W x D) 13.76 x 5.08 x 1.95 in (H x W x D)
Operating conditions	-25 to +55°C / -13 to 131°F Humidity 10 to 85 % RH (non-condensing)
Scope of delivery	<ul style="list-style-type: none"> <li>1x Main Electrical Unit</li> <li>1x Front panel</li> <li>1x Flush-mounting housing (backbox)</li> <li>1x Power supply unit (mains adaptor) with four country-specific outlet adaptors (110 - 240 V AC to 15 V DC)</li> <li>1x RFID key fob</li> <li>1x Screwdriver</li> <li>1x Quickstart guide with Digital Passport</li> <li>1x Installation manual</li> <li>1x Small parts</li> </ul>
Warranty	see <a href="http://www.doorbird.com/warranty">www.doorbird.com/warranty</a>

## CURRENT SYSTEM REQUIREMENTS

System requirements	<p>Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet</p> <p>Internet: High-Speed Landline Broadband Internet connection, DSL, cable or fiber optic, no socks or proxy server</p> <p>Network: Ethernet Network, with DHCP</p>
---------------------	--

Recommended installation height  
Camera lens should be at a min. height of 145 cm (57 in). Before the installation please determine your optimal installation height.

## VIDEO

Camera	HDTV 720p, dynamic (VGA - HDTV)
Lens	High-end ultra wide-angle hemispheric lens 180° horizontal, 90° vertical, straightened, IR-capable
Night-vision	Yes, light sensor, automatic IR-cut filter, 12 IR-LEDs (850 nm)

## AUDIO

Audio components	Speaker and microphone, echo and noise cancellation (AEC, ANR)
Audio streaming	Two-way, full duplex

## NETWORK

Ethernet	RJ45 jack, PoE 802.3af Mode-A, 10/100 Base-T
----------	--

## MOTION SENSOR

Type	Active
Detection angle	54° horizontal, 70° vertical
Range	1 - 10 m (3.3 - 32.9 ft), depends on environment, configurable in 1 m (3.3 ft) steps.
Technology	4D. Based on multiple integrated sensors and algorithms, e.g. Radio Frequency Energy (RFE)
Configuration	<p>Via App, e.g.</p> <ul style="list-style-type: none"> <li>• Range (1 - 10 m / 3.3 - 32.9 ft)</li> <li>• Movement direction (coming, leaving, both)</li> <li>• Individual events (e.g. switch a relay, push notification, SIP call [audio/video], HTTP(s) notification)</li> <li>• Individual schedules</li> </ul>

## RFID

Type	Active Reader Passive Tag (ARPT) system
Standard	ISO/IEC 18000-2:2009 Part 2, EM4100, EM4102
Frequency	125 KHZ
Range	0 - 3 cm, depends on environment
Antenna	Internal
Compatible Transponder	RFID key fobs, sold separately, see <a href="http://www.doorbird.com/buy">www.doorbird.com/buy</a>
Configuration	<p>Up to 100 tags manageable</p> <p>Via App, e.g.</p> <ul style="list-style-type: none"> <li>• Tag (add, delete)</li> <li>• Individual events (e.g. switch a relay, push notification, SIP call [audio/video], HTTP(s) notification)</li> <li>• Individual schedules</li> </ul>

## INTEGRATED WIRELESS MODULES


RFID	125 KHZ
Sensor	24 GHZ, can be disabled

## OPTIONAL ACCESSORIES


Sold separately	see <a href="http://www.doorbird.com/buy">www.doorbird.com/buy</a>
-----------------	--

Special remarks:  
Assembly requires professional skills or a technician.


Front panel material thickness: 3.0 mm (0.12 in)

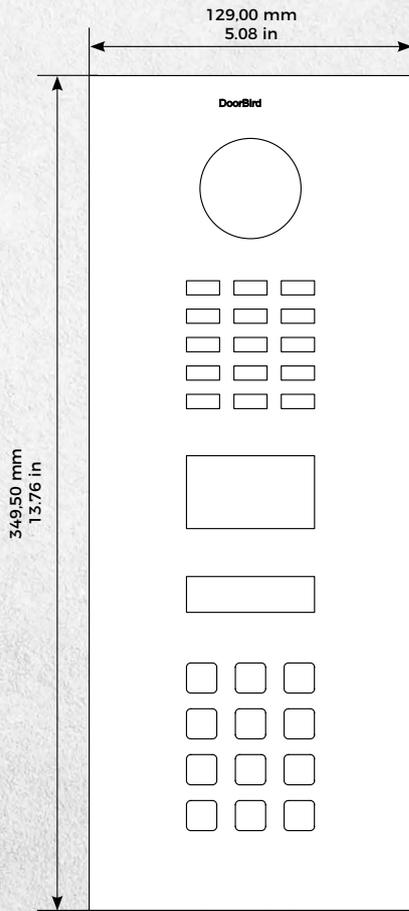

Front panel

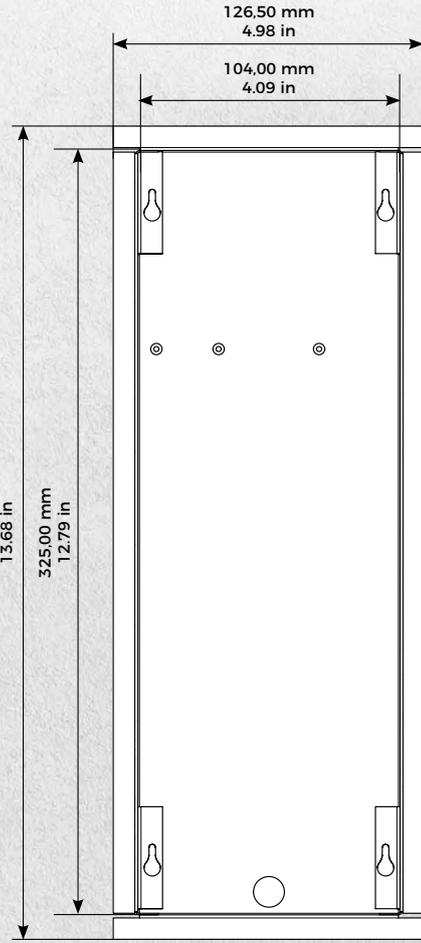


Flush-mounting housing (backbox)

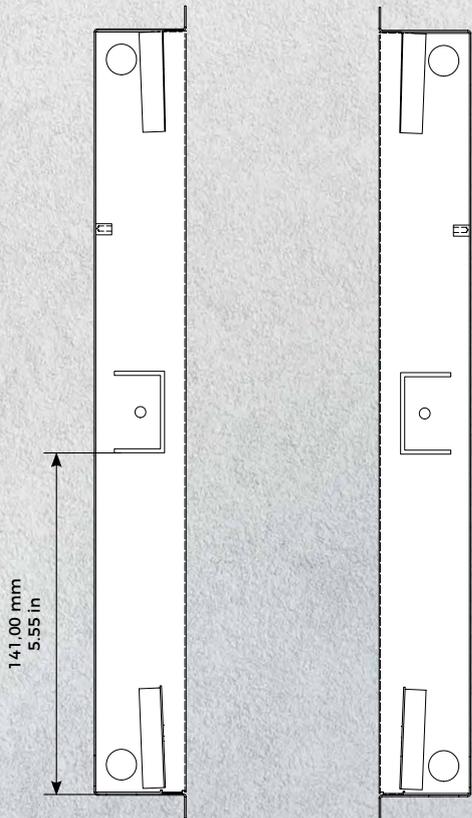

Flush-mounting housing (backbox)

Flush-mounting housing (backbox)

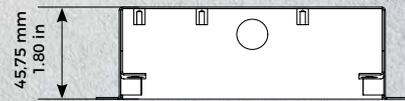

Flush-mounting housing (backbox)