

# GLASS DOOR REACH-IN REFRIGERATORS

MODEL:  MVR-23GDHC  MVR-49GDHC  MVR-72GDHC



MVR-23GDHC



MVR-49GDHC



MVR-72GDHC

Maxx Cold V-Series Glass Door Reach-In Refrigeration combines durability and longevity with visual appeal. Featuring an energy efficient bottom mounted compressor, the glass door refrigerators effectively display foodservice products at the ideal temperature to preserve freshness and extend shelf life. Simple to use programmable solid state digital controls allow for accurate and flexible use of the unit.

## FEATURES AND CONSTRUCTION

- Durable, easy to clean stainless steel exterior and interior
- Self-closing, locking, dual-pane glass doors with easy to grip handles
- Adjustable heavy-duty wire shelves (4 per section/door)
- Open door alert beeps when door has been open for 3 minutes
- Equipped with 4" swivel casters
- Digital control system
- LED interior lighting & temperature display
- Automatic defrost system
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls

## NOMINAL STORAGE CAPACITY

MVR-23GDHC .....	23 Cu Ft (651 L)
MVR-49GDHC .....	49 Cu Ft (1387 L)
MVR-72GDHC .....	72 Cu Ft (2039 L)


## TEMPERATURE

Holding temperature ..... 34°F to 41°F (1°C to 5°C)

- Efficient forced-air refrigeration system

## ELECTRIC

115V / 60Hz / 1Ph  
 (230V / 50-60Hz / 1Ph is available as an option)  
 8.2' (2m) NEMA 5-15P cord set included



NEMA 5-15P

## 3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Zero Ozone Depletion Potential




DOE 2018 Compliant

## MAXX COLD WARRANTY (USA / CANADA)

1 Year Compressor Only Warranty; 6 Months Parts & Labor

For more information, contact:

TechnicalServices@TheLegacyCompanies.com or 877.368.2797

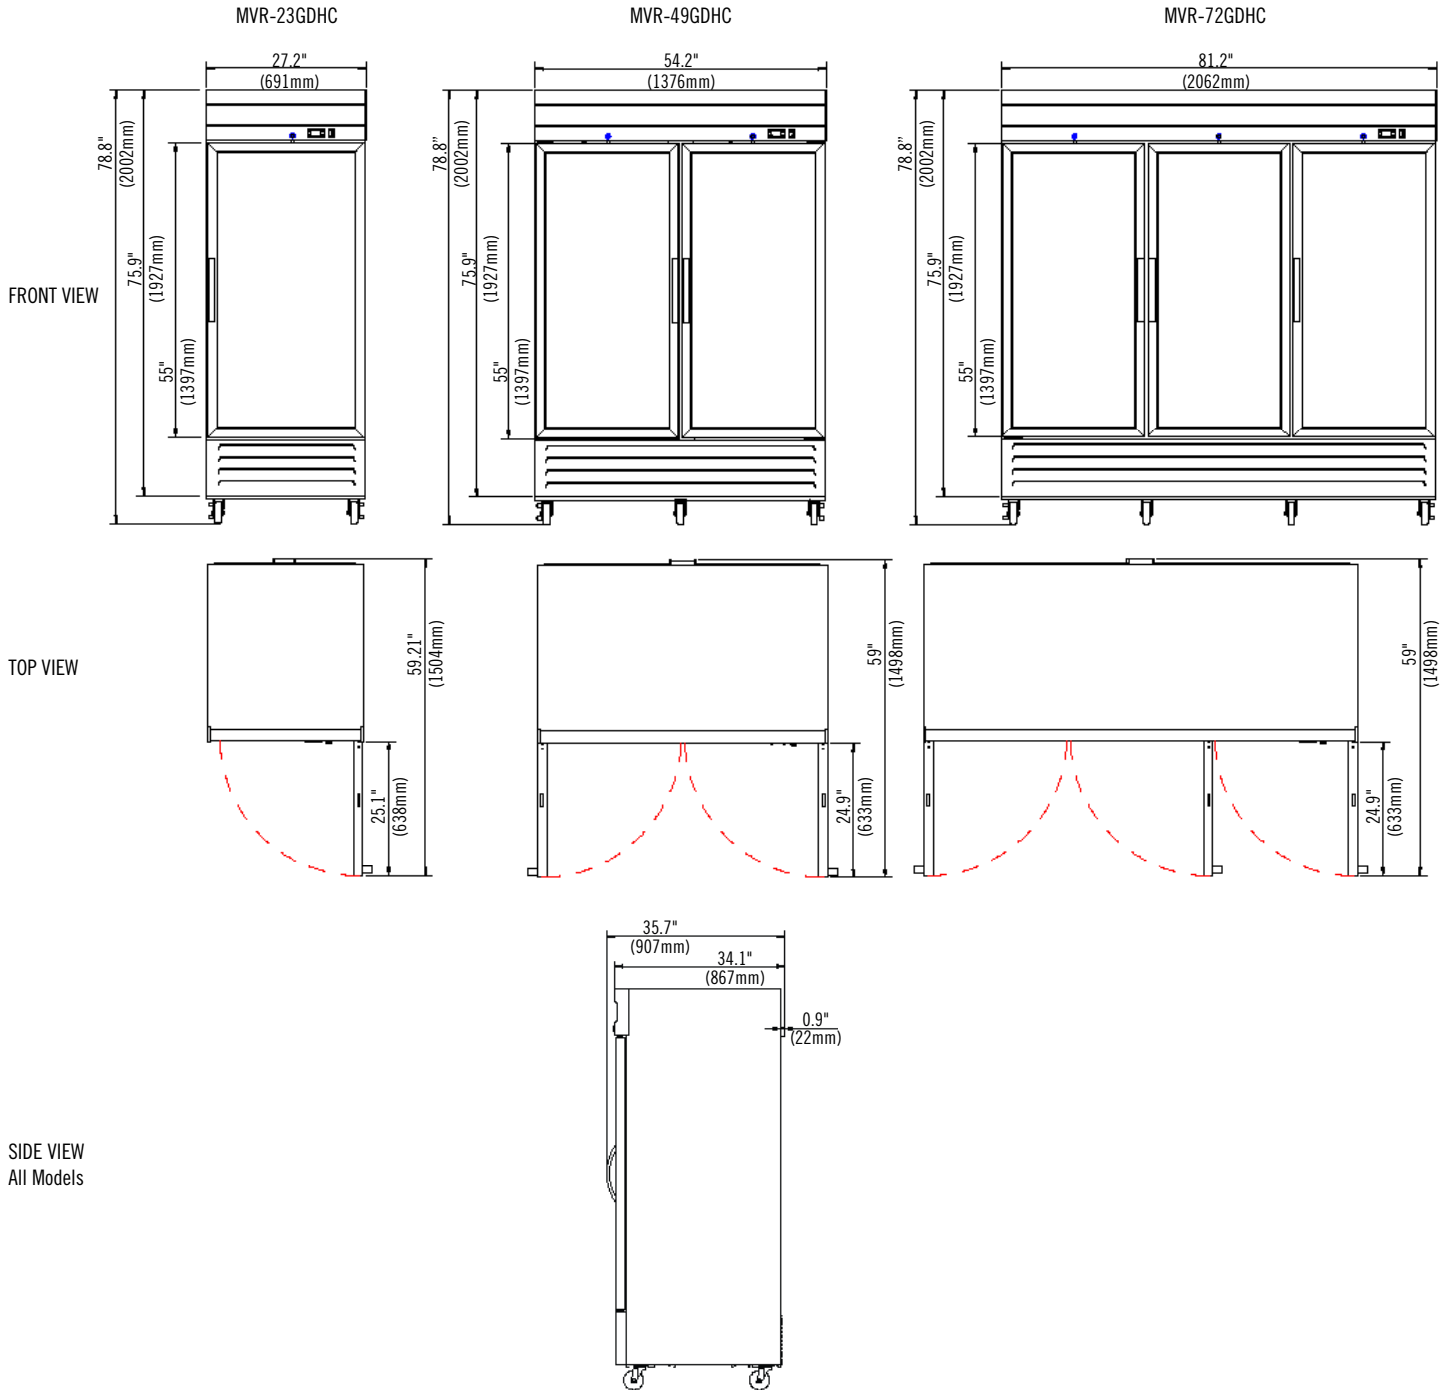

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NOMINAL CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MVR-23GDHC	27.2" x 35.7" x 78.8" (691 x 907 x 2002 mm)	22.3" x 29.06" x 51.37" (566 x 738 x 1305 mm)	19 Cu Ft (538 L)	34°F to 40°F (1°C to 5°C)	2.2A	220 lbs (100 kg)	R-600A 1.76 oz (50 g)	1 / 3	115V / 60Hz / 1Ph
MVR-49GDHC	54.2" x 35.7" x 78.8" (1377 x 879 x 2002 mm)	49.3" x 29.06" x 51.37" (1252 x 738 x 1305 mm)	42 Cu Ft (1189 L)	34°F to 40°F (1°C to 5°C)	2.2A	342 lbs (155 kg)	R-290A 3.0 oz (85 g)	2 / 6	115V / 60Hz / 1Ph
MVR-72GDHC	81.2" x 35.7" x 78.8" (2062 x 879 x 2002 mm)	76.3" x 29.06" x 51.37" (1938 x 738 x 1305 mm)	65 Cu Ft (1841 L)	34°F to 40°F (1°C to 5°C)	2.2A	524 lbs (238 kg)	R-290A 4.06 oz (115 g)	3 / 9	220V / 60Hz / 1Ph

## INSTALLATION

- Shorter caster options are available to lower the overall height of the unit