

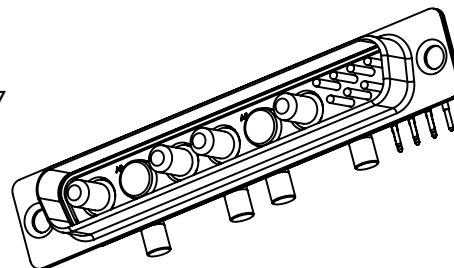
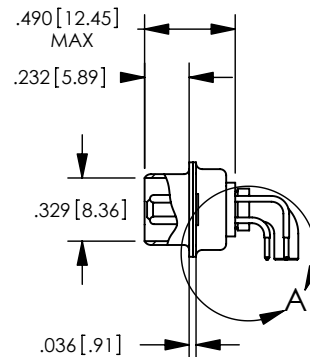


NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD10-0000.
2. SEE CONTACT SALES DRAWING FOR CONTACT SPECIFICATIONS
3. MATERIAL SPECIFICATIONS:
SHELLS: COLD ROLLED STEEL PER ASTM A568
SIGNAL CONTACTS: BRASS PER ASTM B16
INSULATOR: GLASS FILLED
3. FINISH SPECIFICATIONS:
SHELLS: TIN PLATE PER ASTM B545
SIGNAL CONTACTS: .000030 IN. MIN Au PER ASTM B488 OVER
.000050 IN. MIN Ni PER SAE-AMS-QQ-N-290
INSULATOR: BLACK

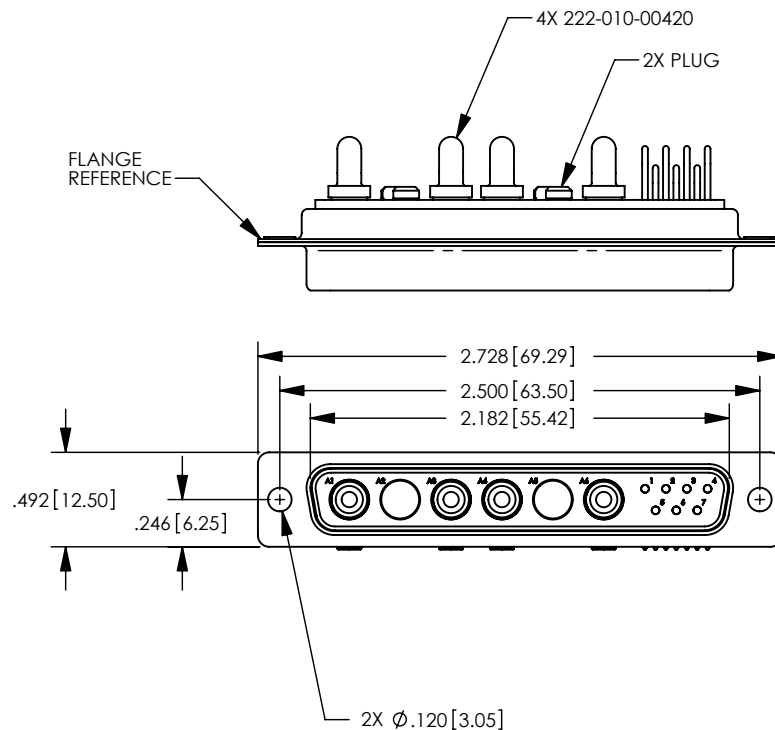

CATALOG P/N: RM13W6P-1017

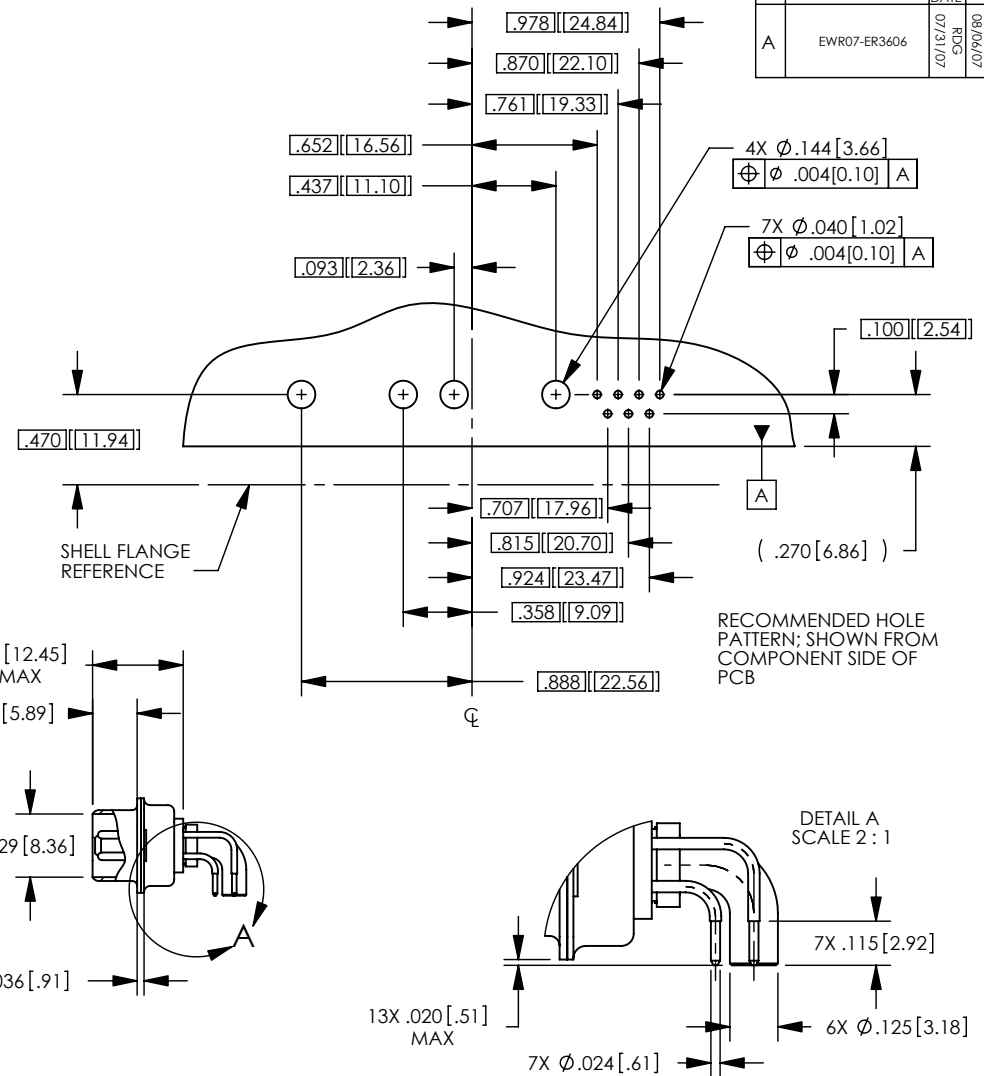

REV	DESCRIPTION	BY	DATE	APPD
A	EWR07-ER3606	RDG	07/31/07	WPM

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 1:1				Winchester Electronics Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER DRAWING				D-SUB PLUG CONNECTOR	
DRAWN RDG	DATE 07/31/07	APPROVED WPM	DATE 08/06/07	A SDRM13W6P-1017	
APPROVED JC	DATE 08/06/07	APPROVED MA	DATE 08/06/07	SHT 1 OF 1	REV A