



Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

BOTTLE COOLERS

MODEL: USBC-25 USBC-35 USBC-50 USBC-65
 USBC-80 USBC-95



USBC-25



USBC-65



USBC-35



USBC-80



USBC-50



USBC-95


U-Star's Bottle Coolers will keep all of your beverages cold and ready to serve. Perfect for any size bar, pub or restaurant that operates in a high volume setting. These bottle coolers have a painted aluminum interior and a black coated steel exterior for a sleek look that goes well with any bar setting. Stainless steel sliding lids on the top allow for easy and quick access to the beverages inside the unit. Plastic coated steel dividers help you keep your beverages organized while the built-in bottle opener and cap catcher will keep your work area clean and free of debris on the floor. The lids are lockable so that the beverages inside the unit stay safe after hours. These models are ETL Listed and ETL Sanitation. They are backed with a 2 year warranty on parts and labor and a 5 year warranty on the compressor.

FEATURES AND CONSTRUCTION

- Black coated steel exterior
- Painted aluminum interior
- Environmentally-friendly R290 refrigerant
- Foamed-in-place polyurethane high density cell insulation throughout the entire cabinet
- Lockable stainless steel sliding lids
- Precise digital temperature controller with LED display
- Built-in bottle opener with cap catcher
- Automatic defrosting
- Plastic coated dividers included

ELECTRIC

115V / 60Hz / 1Ph
7' (2.1m) NEMA 5-15P cord set included



NEMA 5-15P

3RD PARTY APPROVALS



Intertek



Intertek

U-STAR WARRANTY

U-Star bottle coolers are warrantied for 2 years on parts & labor, 5 year warranty on the compressor.

For warranty service on these products please call National Service America (NSA) at 1-877-672-7740.


NOMINAL STORAGE CAPACITY

USBC-25	4.1 Cu Ft (116 L)
USBC-35	8.5 Cu Ft (240 L)
USBC-50	13.5 Cu Ft (382 L)
USBC-65	18.1 Cu Ft (512 L)
USBC-80	22.8 Cu Ft (646 L)
USBC-95	27.5 Cu Ft (779 L)

TEMPERATURE

Holding Temperature..... 33°F to 41°F (1°C to 5°C)

- These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity

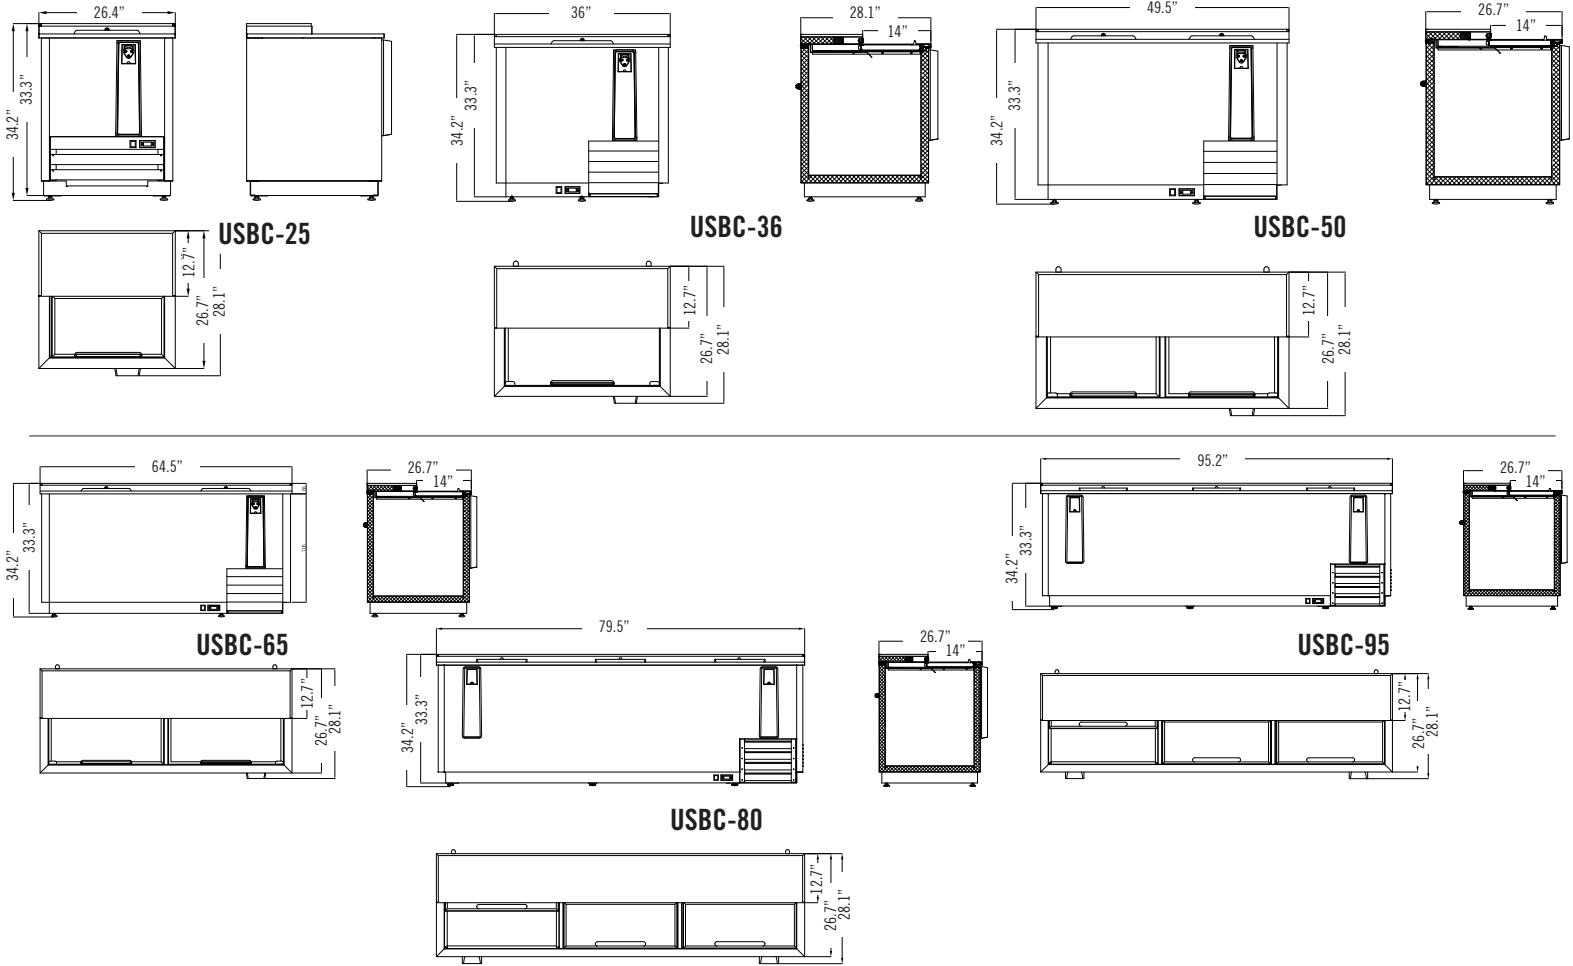

Model	USBC-25	USBC-36	USBC-50	USBC-65	USBC-80	USBC-95
Lids	1	2	2	2	3	3
Dividers	N/A	1	3	3	4	5
Net Volume (Cu. Ft.)	4.1 Cu. Ft.	8.5 Cu. Ft.	13.5 Cu. Ft.	18.1 Cu. Ft.	22.8 Cu. Ft.	27.5 Cu. Ft.
Overall Dimensions (in)	26.4" × 28.1" × 34.2"	36" × 28.1" × 34.2"	49.5" × 28.1" × 34.2"	64.5" × 28.1" × 34.2"	79.5" × 28.1" × 34.2"	95.2" × 28.1" × 34.2"
Interior Dimensions (in)	22.3" × 23" × 15.7"	31.9" × 23" × 26.1"	45.4" × 23" × 26.1"	60.4" × 23" × 26.1"	75.4" × 23" × 26.1"	91.1" × 23" × 26.1"
Refrigerant	R290	R290	R290	R290	R290	R290
Horsepower	1/4	1/4	1/4	1/3	1/2	1/2
Voltage/Hertz/Phase	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Amps	2.4	2.4	2.5	2.5	3.3	3.3
Net Weight (lbs)	128 lbs	159 lbs	181 lbs	254 lbs	276 lbs	386 lbs
Gross Weight (lbs)	159 lbs	199 lbs	225 lbs	298 lbs	327 lbs	452 lbs
Shipping Dimensions (in) W × D × H	30.3" × 31.1" × 42.7"	41.5" × 32.7" × 42.7"	55.1" × 32.7" × 42.7"	70.1" × 32.7" × 42.7"	85" × 32.7" × 42.7"	100.8" × 32.7" × 42.7"
Capacity	6 Cases (12 oz. Cans)	14.5 Cases (12 oz. Cans)	24 Cases (12 oz. Cans)	32 Cases (12 oz. Cans)	42 Cases (12 oz. Cans)	37.5 Cases (12 oz. Cans)
	4.5 Cases (12 oz. Bottles)	11 Cases (12 oz. Bottles)	16.5 Cases (12 oz. Bottles)	22 Cases (12 oz. Bottles)	30 Cases (12 oz. Bottles)	55 Cases (12 oz. Bottles)