

YOUR AUTHORIZED CONTINENTAL DEALER



GAS FURNACES

C97 SERIES

ULTRA-HIGH EFFICIENCY TWO STAGE

CONTINENTAL

P: 1-866-820-8686
continentalcomfort.com



Consult your owner's manual for complete installation instructions, accurate framing dimensions and proper clearances to combustibile material. Check all local and national building codes. All specifications are subject to change without prior notice due to on-going product improvements. Products may not be exactly as shown.

Build Quality, Build Confidence.
continentalcomfort.com



CONTINENTAL

C97 SERIES

Efficiency At Its Best

WHISPER QUIET™ Soft Start Motor

With a Whisper Quiet™ operation the EnerSave Plus and EnerSave Pro motors will 'soft start' & 'soft stop' gradually changing speed to reduce the noise created by conventional motors.

Interior Lighting for Better Visibility


C97 Series includes LED lights inside the furnace cabinet will automatically turn on when the front panels are removed.

UV-C Technology Furnace Kit

The C97 Series uses chemical free, ultra-violet light to intercept airborne pathogens like allergens and dust mites. It halts bacterial growth from reoccurring and helps to maintain healthy air in your home.

FEATURES

- 35,000 - 105,000 BTU models available
- Patented SureView™ burner system window allows a unique view of the flames in operation, a first in the industry
- One of the smallest high efficiency furnaces on the market
- Built-in LED service lights that come on automatically
- High efficiency variable speed blower motor
- High quality stainless steel primary and secondary heat exchanger
- Self-diagnostic integrated furnace control (IFC)
- Manufactured for Natural Gas, propane conversion kit available
- Flexfit - Upflow, Right, Left
- Lifetime Heat Exchanger Warranty

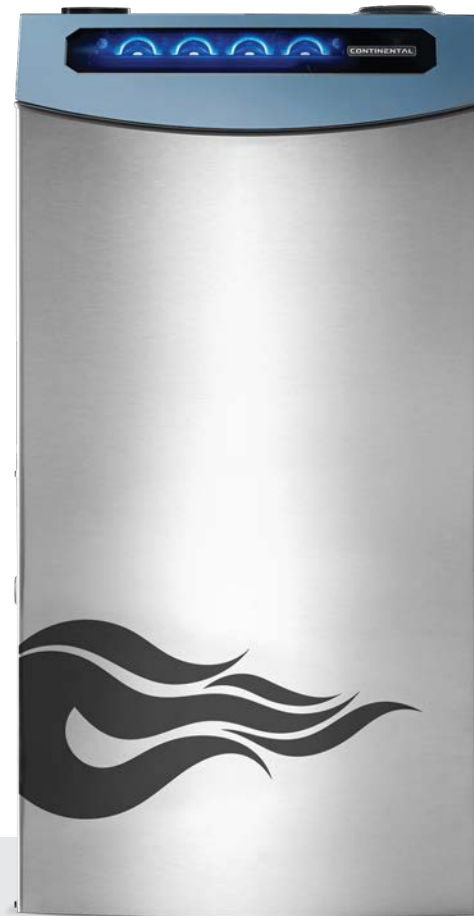

WiFi Capable

C97 Series is compatible with smart thermostat technology. Easily paired with a wide variety of thermostats and control boards, the C97 is compatible with your home.



SureView™ Burner System

Patented SureView™ burner system window allows a unique view of the flames in operation, a first in the industry.



SPECIFICATIONS

MODEL	WUV035T2AA-C	WUV050T3AA-C	WUV070T3AA-C	WUV070T4BA-C	WUV090T5BA-C	WUV105T5BA-C
HEATING CAPACITIES						
Efficiency (AFUE)	97%	97%	97%	97%	97%	97%
Input High Fire (BTU/H)	35,000	53,000	70,000	70,000	88,000	105,000
Input Low Fire (BTU/H)	24,000	37,000	49,000	49,000	61,000	73,000
DIMENSIONS						
Height (in)	34	34	34	34	34	34
Depth (in)	31	31	31	31	31	31
Width (in)	17 ½	17 ½	17 ½	22 ½	22 ½	22 ½
Weight (lbs)	135	142	149	174	180	187
FURNACE CAPACITY						
CFM High Fire*	517	732	1167	972	1206	1526
CFM Low Fire*	395	576	905	748	914	1156
Return Air (in)	14 X 23	14 X 23	14 X 23	14 X 23	14 X 23	14 X 23
AIRFLOW AND COOLING						
Motor Size	1/3 hp	1/2 hp	1/2 hp	3/4 hp	1 hp	1 hp



**PARTS AND
UNIT REPLACEMENT
LIMITED WARRANTY**