


ASSEMBLY INSTRUCTIONS




PARTS PACKING CONFIGURATIONS










FULLY ASSEMBLED



HARDWARE KIT PACKED IN BOX #1				
No.	Description	Image	Quantity	
1	THREADED BOLT (8x90mm)	CONTINUENTALIANIANIANIANIANIANIANIANIANIANIANIANIANI	2 PCS	
2	HALF MOON WASHER (7x14x27mm)		2 PCS	
3	HEX NUT (M8)		2 PCS	
4	WRENCH (13mm)		1 PC	
5	ALLEN BOLT (8x55mm)		6 PCS	
6	SPRING WASHER (M8)		6 PCS	
7	FLAT WASHER (M8)		6 PCS	
8	ALLEN KEY (4mm)		1 PC	

HARDWARE KIT PACKED IN BOX #2				
No.	Description	Image	Quantity	
1	THREADED BOLT (8x90mm)	CONTRIBUTION CONTR	8 PCS	
2	HALF MOON WASHER (7x14x27mm)		8 PCS	
3	HEX NUT (M8)		8 PCS	
4	WRENCH (13mm)		1 PC	
9	WOOD SCREW (4x30mm)	*	10 PCS	













ASSEMBLY INSTRUCTIONS






NOTE: USE HARDWARE PACKED IN BOX #1 FOR STEPS 1, 2 & 3

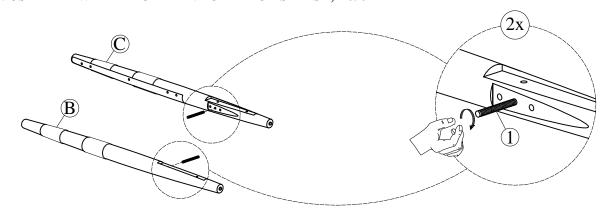

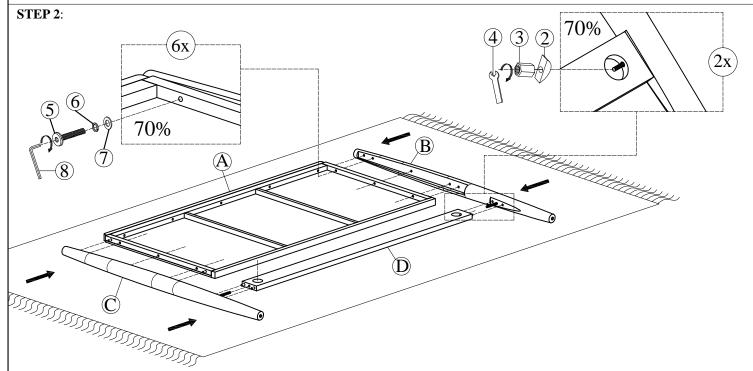


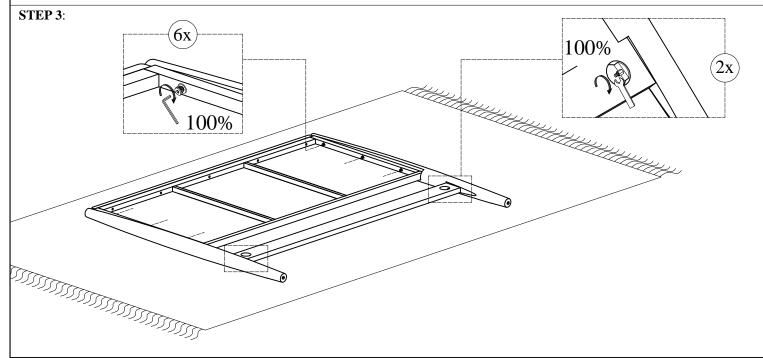


ASSEMBLY INSTRUCTIONS



STEP 4:

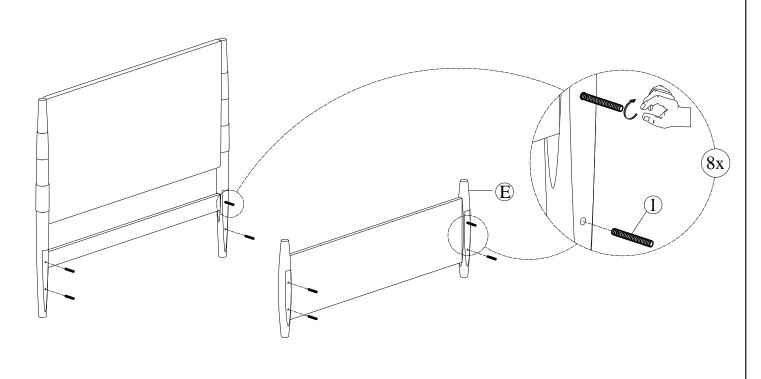


STEP 5:

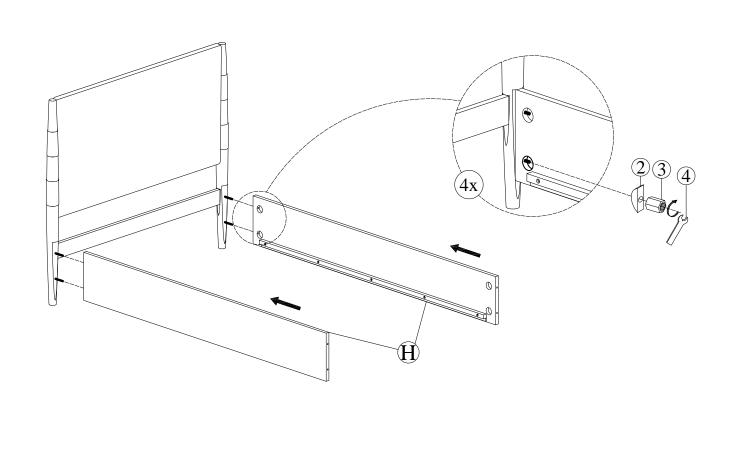

ASSEMBLY INSTRUCTIONS



STEP 6:

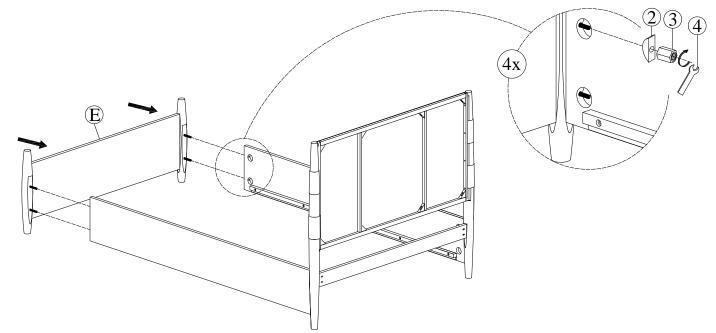




STOP


- IF USING BED WITH AN ADJUSTABLE MATTRESS BASE, SKIP STEPS 7, 8 & 9 AND REFERENCE APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- \bullet IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION, CONTINUE TO STEP 7

STEP 7:

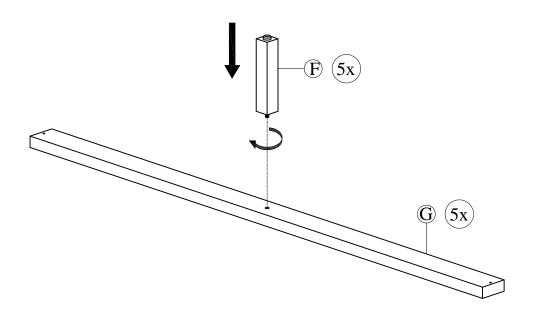






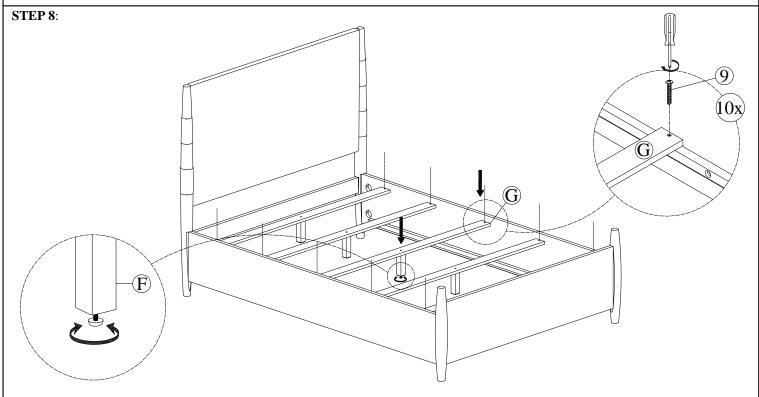

STEP 9:

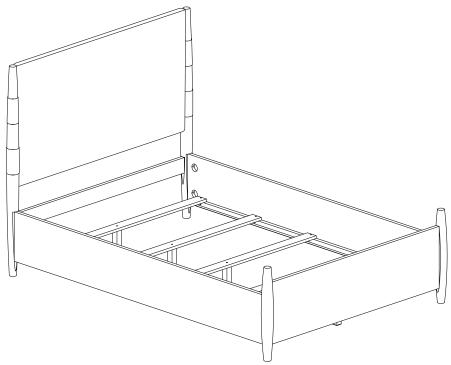


ASSEMBLY COMPLETE

INSTRUCTIONS FOR ADJUSTING LEVELERS:

Position the bed in your space and locate the leveler under each support leg.

Turn the leveler counter-clockwise to extend the leveler and clockwise to retract it.

Adjust each leveler until each support leg is applying equal, upward pressure on the support slat.



MAINTENANCE INSTRUCTIONS:

- Periodically check all fittings and tighten if necessary, as they can loosen over time.
- Always remove box spring and mattress before moving
- Lift the bed when moving it. Dragging the bed can damage the center support.
- Readjust levelers after moving the bed.

ASSEMBLY INSTRUCTIONS





AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.

PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.


THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

F. SLAT SUPPORT LEG :5 PCS

9. WOOD SCREW (4x30mm) :10 PCS

G. SLAT :5 PCS

STEP 1: USE ALLEN KEY (8) IN BOX #1 TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

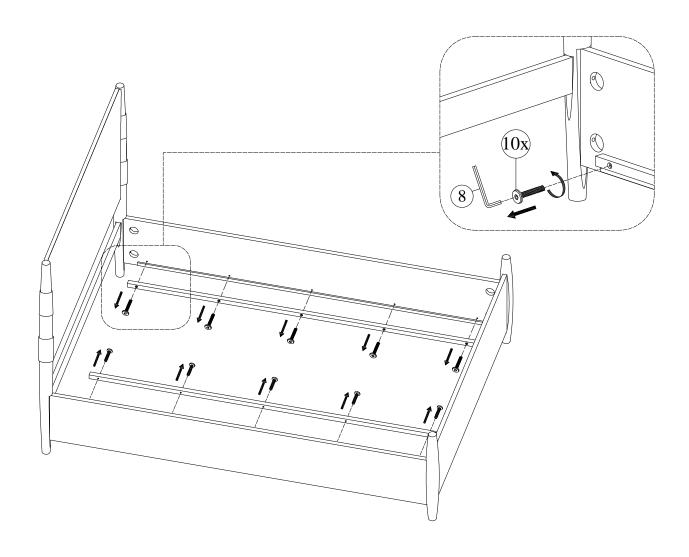

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION.