


IMPORTANT SAFEGUARDS

1. **DO NOT INSTALL OR SERVICE WHILE ENERGIZED.**
2. MUST BE installed by qualified personnel.
3. MUST BE installed in compliance with national and local codes.
4. ENSURE that the latching springs are fully engaged prior to moving to the next connection.
5. Cap all unused connector openings. Dust cover caps are provided in products shipping carton.
5. DO NOT use this component for other than its intended use.
6. DO NOT tamper with the contacts in the component or attempt to modify product.
7. DO NOT change or alter circuitry.
8. DO NOT attempt to use cables of insufficient length.
9. Manufactured Wiring System components are described in the National Electrical Code Article 604 and MUST BE installed accordingly.

Table 1

Ground	12/2G	12/3G	12/4G
Conductor			
Conductor			
Conductor			
Conductor			

ONEPASS SYSTEM VIEW

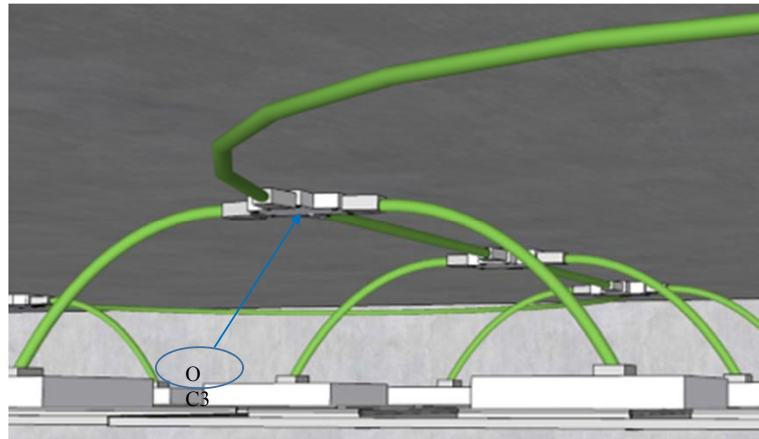

OC3 - ONEPASS CABLE 3-PORT



Figure 1



Figure 2

1. Select the appropriate OC3 (Fig 1).
2. Connect male end of OnePass System to the female end of OC3.
3. Connect female end of OnePass System to the male end of OC3.
4. Any ports not used should have the dust cover over them.

Follow Same Instructions for OC2 AMH option (see Figure 2)

