

SPECIFICATIONS

Power Supply	DC9V - 15V
Lens Angle (Deg.)	170°
TV System	PAL/NTSC
Video Output	1.0vp-p, 75Ω
S/N Ratio	≥ 48 dB
Operating Temp. (Deg. C)	-30°C ~ +70°C (RH95% Max.)
White Balance	Auto
Minimum Illumination	0,5 LUX
AGC	Auto
Effective Pixels	656*492

Above parameters can be modified without notification.

BOSS[®]
AUDIO SYSTEMS

CAM18 USER'S MANUAL

**HIGH RESOLUTION COLOR
MINI REAR-VIEW CAMERA**



DO NOT FULLY RELY ON REVERSE CAMERA WHEN BACKING UP.
ALWAYS KNOW YOUR SURROUNDINGS BEFORE BACKING UP.

BOSS[®]
AUDIO SYSTEMS


BOSS Audio Systems
3451 Lunar Court • Oxnard, CA 93030

805-751-4853 Customer Service
Tech support: www.bosssaudio.com/support



INSTALLATION


1. WIRE CONNECTION

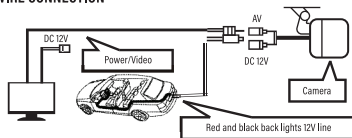

Complete all required connections so that all lines are hidden in vehicle.

2. CAMERA INSTALLATION

Install by drilling wire and screw holes in open space of upper rear license plate cove. Screw wing mount bracket to vehicle body.

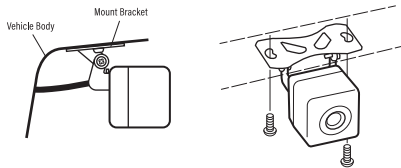

TROUBLESHOOTING GUIDE

The following checklist might help to solve the problems when using this unit. Please double check to insure connection and procedure of operation is done properly before using checklist.

PROBLEM	CAUSE/SOLUTION
NO IMAGE	Check that power cable is securely connected.
	Check to insure there is a good connection between video-in and monitor.
	Check that REVERSE GEAR is engaged. Check to insure correct monitor setup.
IMAGE BLURRING	Check for water/water stain or dust on camera lens. Clean camera lens
IMAGE SHAKING	Check to insure camera is mounted and secured tightly.
IMAGE SLANTED	Adjust camera mounting bracket

NOTE:

If problems persist – consult nearest service dealer. DO NOT attempt to disassemble or modify unit.