

Lights | Remote Heads | Exit Signs | EM-Drivers | Outdoor
LED Emergency Series



More Choices for **More Applications**

18113GYWL Emergency Light

This thermoplastic emergency lighting unit combines a low-profile, traditional design in an affordable package. The 18113 is available in gray and utilizes ultra-bright MR-16 halogen lamps. With fully adjustable heads, the 18113 complements any design application.

Construction


Completely self-contained
Fully automatic operation
Compact, low-profile design

Optical System

Precision engineered Prismatic Lens

Electrical

Incandescent 6V 5.4W lamps with PAR-type lamp heads
6-Volt, sealed lead acid, rechargeable, maintenance-free battery
Automatic, low-voltage disconnect (LVD)
Push-to-test switch
Dual voltage, 120/277V operation
Minimum 90 minutes Emergency Operation
Lamp wattage 2 X 5.4W
UL listed for wet location

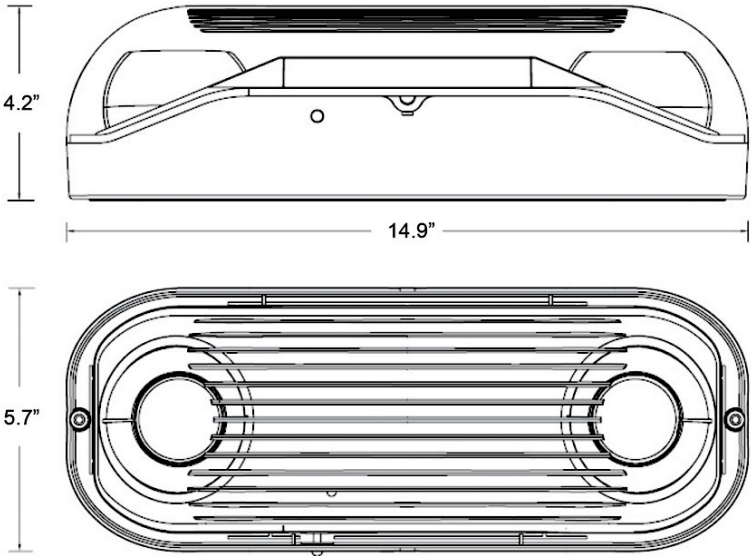

Product Information	
Input Voltage (VAC)	120/277
Power Draw (W)	2 X 5.4W
Emergency Operation	Minimum 90 Minutes



Applications



The 18113GYWL series can be installed in many wet location applications such as locker rooms, green houses, gyms and more.

Installation



The 18113GYWL utilizes ultra-bright MR-16 halogen lamps

The 18113GYWL comes equipped with a light indicator and a push to test switch..



18113GYWL Ordering Information			
Series	Battery	Trim Color	Lamp Wattage
18113GYWL	6V (Sealed lead acid)	Gray	2 x7W

Warehouse Locations

Albuquerque, NM
Atlanta, GA
Detroit, MI
Houston, TX
Indianapolis, IN

Lombard, IL
Miami, FL
Syracuse, NY
Van Nuys, CA

T 800.821.6283

F 800.892.8393

www.nicorlighting.com

2200 Midtown Pl. NE
Albuquerque, NM 87107 USA



LIT-EMFB-10PK

©2019 NICOR® • ALL RIGHTS RESERVED



NICOR®  **LED**