

ElectriFLEX LD™ (Light Duty) Commercial Wall Hung Electric Water Heater

ElectriFLEX LD™ Wall Hung Electric Models

C.E.C. Listed

Model Number	Nominal Gal. Capacity		Recovery at 100°F Rise*		A Height	B Jacket Dia.	C Wall to Front	D Height to Bracket	F Height to T&P Conn.	J C/L of Water Conn.	Water Conn. NPT	Approx. Shipping Weight
	U.S. Gal.	Imp. Gal.	U.S. GPH	Imp. GPH	in.	in.	in.	in.	in.	in.	in.	lbs.
LE16WV3-1†	6	5	6	5	16 1/8	14	14 5/8	12	12	8	3/4	33
LE112WV3-1	12	10	6	5	16 1/2	18	18 5/8	12 1/2	13	8	3/4	48
LE120WV3-1	19	16	6	5	24 1/2	18	18 5/8	18 1/4	21	8	3/4	59

Model Number	Nominal Liter Capacity	Recovery at 56°C Rise*		A Height	B Jacket Dia.	C Wall to Front	D Height to Bracket	F Height to T&P Conn.	J C/L of Water Conn.	Water Conn. NPT	Approx. Shipping Weight
		Liters/Hour	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	kg.
LE16WV3-1†	23	23	410	356	371	305	305	203	19	15	
LE112WV3-1	45	23	419	457	473	318	330	203	19	22	
LE120WV3-1	72	23	622	457	473	464	533	203	19	27	

Specify wattage and voltage when ordering.


Use chart below for maximum wattages at certain voltages.

† Maximum wattage at any voltage is 3000W.

For 5 year models, change suffix "3" to "5". Single element only.

* Based on 1500W operation. NSF Kits available when ordering.

Wattage	Recovery ▲ GPH Temperature Rise °F					Wattage	Recovery ▲ LPH Temperature Rise °C				
	60	80	90	100	120		34	45	50	56	67
1500W	10	8	7	6	5	1500W	38	30	26	23	19
2000W	14	10	9	8	7	2000W	53	38	34	30	26
2500W	17	13	11	10	9	2500W	64	49	42	38	34
3000W	21	15	14	12	10	3000W	79	57	53	45	38
3500W	24	18	16	14	12	3500W	91	68	61	53	45
4000W	28	21	18	16	14	4000W	106	79	68	61	53
4500W	31	23	21	19	15	4500W	117	87	79	72	57
5000W	34	26	23	21	17	5000W	129	98	87	79	64
5500W	38	29	25	23	19	5500W	144	110	95	87	72
6000W	41	31	28	25	21	6000W	155	117	106	95	79

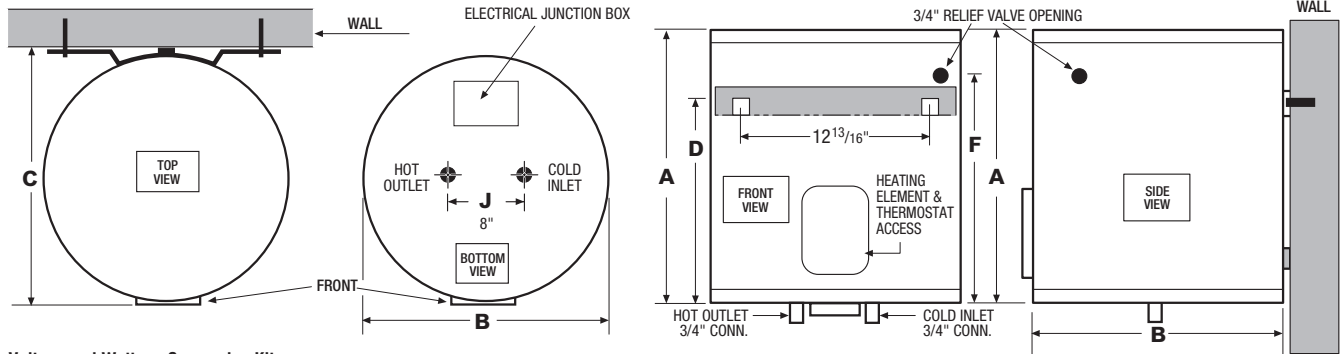

Voltage and Wattage Conversion Kits

Single Element Wattage	Voltage						
	120V	208V	240V	277V	380V	415V	480V
1500W	415-46409-01	415-46409-05	415-46409-13	415-46409-16	415-46409-24	415-46409-41	415-46409-32
2000W	415-46409-02*	415-46409-06	415-46409-05	415-46409-17	415-46409-43	415-46409-24	415-46409-33
2500W	415-46409-03*	415-46409-07	415-46409-06	415-46409-18	415-46409-25	415-46409-43	415-46409-34
3000W	415-46409-04*	415-46409-08	415-46409-14	415-46409-19	415-46409-26	415-46409-25	415-46409-35
3500W	N/A	415-46409-09	415-46409-07	N/A	415-46409-27	415-46409-26	N/A
4000W	N/A	415-46409-10	415-46409-08	415-46409-20	415-46409-29	415-46409-27	415-46409-36
4500W	N/A	415-46409-11	415-46409-09	415-46409-21	415-46409-30	415-46409-28	415-46409-37
5000W	N/A	415-46409-12	415-46409-15	415-46409-22	415-46409-31	415-46409-29	415-46409-38
5500W	N/A	415-46409-46*	415-46409-10	415-46409-40**	415-46409-44	415-46409-30	415-46409-42**
6000W	N/A	415-46409-47*	415-46409-48*	415-46409-23	415-46409-45	415-46409-31	415-46409-39

Wattage Limitations	Voltage						
	120V	208V	240V	277V	380V	415V	480V
1500W	yes	yes	yes	yes	yes	yes	yes
2000W	yes	yes	yes	yes	yes	yes	yes
2500W	yes	yes	yes	yes	yes	yes	yes
3000W	yes	yes	yes	yes	yes	yes	yes
3500W	no	yes	yes	no	yes	yes	no
4000W	no	yes	yes	yes	yes	yes	yes
4500W	no	yes	yes	yes	yes	yes	yes
5000W	no	yes	yes	yes	yes	yes	yes
5500W	no	yes	yes	no	yes	yes	no
6000W	no	yes	yes	yes	yes	yes	yes

Note: Left chart can be used to determine maximum wattage at certain voltages. **INCOLOY® element only. * 415-46409-02, -03, -04, -46, -47, & -48 contain only one element. These kits cannot be wired as simultaneous. These are non-simultaneous kits only. Except where noted above, each kit will include two replacement elements, two gaskets, a rating plate overlay and one set of instructions. For water heaters with only one element, please retain the extra element and gasket as a service part.

General:

All models are exempt from NAECA requirements and ASHRAE Standard 90.1b. All models ETL listed. These heaters are wired Single Phase, 120V with one 1500W element, unless otherwise specified. All water and electrical connections are 3/4" (19mm) NPT. All models certified at 300 PSI test pressure (2068 kPa) and 150 PSI working pressure (1034 kPa). Applicable models CSA verified for energy performance in accordance with C191.1-M90.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

— BRADFORD WHITE IS —



For field service, contact your professional installer or local Bradford White sales representative.

Sales 800-523-2931 ■ Fax 215-641-1612

Technical Support 800-334-3393 ■ Email techserv@bradfordwhite.com

Warranty 800-531-2111 ■ Email warranty@bradfordwhite.com

International: Telephone 1-215-641-9400 ■ Email international@bradfordwhite.com / www.bradfordwhite.com

Built to be the Best™

Commercial Electric Water Heater

ElectriFLEX LD™ Lowboy Electric Models

Meet or exceed ASHRAE 90.1b (current standard) C.E.C. Listed

Model Number	Nominal Gal. Capacity		Recovery at 100°F Rise*		A Floor to Top of Heater	B Jacket Dia.	C Floor to Water Conn.	F Floor to T&P Conn. ††	J C/L of Water Conn.	M Water Conn. NPT	Approx. Shipping Weight
	U.S. Gal.	Imp. Gal.	U.S. GPH	Imp. GPH	in.	in.	in.	in.	in.	in.	lbs.
LE120L3-3†	19	16	18	15	24 3/4	18	25 3/4	19 1/4 / 24 7/8	8	3/4	58
LE130L3-3**	30	25	18	15	30	20	32 3/4	24 / 29 3/8	8	3/4	86
LE140L3-3**	40	33	18	15	32 13/16	22	33 3/4	24 3/8 / 31 3/4	8	3/4	115
LE150L3-3**	47	33	18	15	32 13/16	24	34 1/2	24 1/2 / 31 3/4	8	3/4	140


Model Number	Nominal Liter Capacity	Recovery at 56°C Rise*		A Floor to Top of Heater	B Jacket Dia.	C Floor to Water Conn.	F Floor to T&P Conn. ††	J C/L of Water Conn.	M Water Conn. NPT	Approx. Shipping Weight
		Liters/Hour	mm.	mm.	mm.	mm.	mm.	mm.	mm.	kg.
LE120L3-3†	72	68	629	457	654	489 / 632	203	19	26	
LE130L3-3**	114	68	762	508	832	610 / 746	203	19	39	
LE140L3-3**	151	68	834	559	857	619 / 806	203	19	52	
LE150L3-3**	178	68	834	610	876	622 / 806	203	19	64	

Specify wattage and voltage when ordering. Use chart below for maximum wattages at certain voltages. **Models include supplied insulation blanket (2" (51mm) thick). Dimensions in charts above do not include blanket thickness. For 5 year models, change suffix "3" to "5". *Based on 4500W/4500W, Non-Simultaneous operation. NSF Kits available when ordering. †Exempt from ASHRAE 90.1b. †† All models feature side or top T&P location and must specify when ordering. "D" dimension listed as side/top.

Wattage Limitations for Non-Simultaneous and Simultaneous Operation	Voltage							
	120V	208V	240V	277V	380V	415V	480V	
1500W / 1500W	yes	yes	yes	yes	yes	yes	yes	
2000W / 2000W	no	yes	yes	yes	yes	yes	yes	
2500W / 2500W	no	yes	yes	yes	yes	yes	yes	
3000W / 3000W	no	yes	yes	yes	yes	yes	yes	
3500W / 3500W	no	yes	yes	no	yes	yes	no	
4000W / 4000W	no	yes	yes	yes	yes	yes	yes	
4500W / 4500W	no	yes	yes	yes	yes	yes	yes	
5000W / 5000W	no	yes	yes	yes	yes	yes	yes	
5500W / 5500W	no	no	yes	no	yes	yes	no	
6000W / 6000W	no	no	no	yes	yes	yes	yes	

Wattage	Recovery ▲ GPH Temperature Rise °F					Wattage	Recovery ▲ LPH Temperature Rise °C				
	60	80	90	100	120		34	45	50	56	67
1500W	10	8	7	6	5	1500W	38	30	26	23	19
2000W	14	10	9	8	7	2000W	53	38	34	30	26
2500W	17	13	11	10	9	2500W	64	49	42	38	34
3000W	21	15	14	12	10	3000W	79	57	53	45	38
3500W	24	18	16	14	12	3500W	91	68	61	53	45
4000W	28	21	18	16	14	4000W	106	79	68	61	53
4500W	31	23	21	18	15	4500W	117	87	79	68	57
5000W	34	26	23	21	17	5000W	129	98	87	79	64
5500W	38	29	25	23	19	5500W	144	110	95	87	72
6000W	41	31	28	25	21	6000W	155	117	106	95	79

▲ (GPH based on Non-Simultaneous operation, when Simultaneous operation the GPH will approximately double.)



Voltage and Wattage Conversion Kits

Simultaneous and Non-Simultaneous Wattage	Voltage						
	120V	208V	240V	277V	380V	415V	480V
1500W / 1500W	415-46409-01	415-46409-05	415-46409-13	415-46409-16	415-46409-24	415-46409-41	415-46409-32
2000W / 2000W	N/A	415-46409-06	415-46409-05	415-46409-17	415-46409-43	415-46409-24	415-46409-33
2500W / 2500W	N/A	415-46409-07	415-46409-06	415-46409-18	415-46409-25	415-46409-43	415-46409-34
3000W / 3000W	N/A	415-46409-08	415-46409-14	415-46409-19	415-46409-26	415-46409-25	415-46409-35
3500W / 3500W	N/A	415-46409-09	415-46409-07	N/A	415-46409-27	415-46409-26	N/A
4000W / 4000W	N/A	415-46409-10	415-46409-08	415-46409-20	415-46409-29	415-46409-27	415-46409-36
4500W / 4500W	N/A	415-46409-11	415-46409-09	415-46409-21	415-46409-30	415-46409-28	415-46409-37
5000W / 5000W	N/A	415-46409-12	415-46409-15	415-46409-22	415-46409-31	415-46409-29	415-46409-38
5500W / 5500W	N/A	N/A	415-46409-10	415-46409-40**	415-46409-44	415-46409-30	415-46409-42**
6000W / 6000W	N/A	N/A	N/A	415-46409-23	415-46409-45	415-46409-31	415-46409-39


Note: Above chart can be used to determine maximum wattage at certain voltages. **INCOLOY® element only.

Each kit will include two replacement elements, two gaskets, a rating plate overlay and one set of instructions. For water heaters with only one element, please retain the extra element and gasket as a service part.

General:

All models are exempt from NAECA requirements. All models ETL listed. These heaters are wired inter-locking (Non-Simultaneous, Three Phase) 240V with two 4500W elements, unless otherwise specified. All water connections are 3/4" NPT (19mm). All electrical connections are 3/4" (19mm). All models certified at 300 PSI test pressure (2068 kPa) and 150 PSI working pressure (1034 kPa.)

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

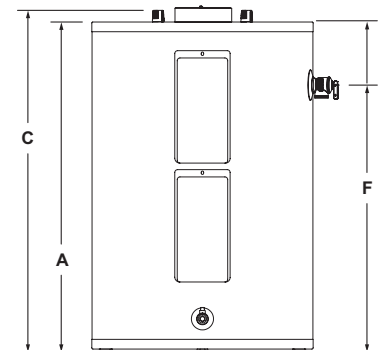

— BRADFORD WHITE IS —



For field service, contact your professional installer or local Bradford White sales representative.

Sales 800-523-2931 ■ Fax 215-641-1612

Technical Support 800-334-3393 ■ Email techserv@bradfordwhite.com

Warranty 800-531-2111 ■ Email warranty@bradfordwhite.com

International: Telephone 1-215-641-9400 ■ Email international@bradfordwhite.com / www.bradfordwhite.com

Built to be the Best™