

BOSS[®]
AUDIO SYSTEMS



BOSS[®]
AUDIO SYSTEMS



MC475BA USER'S MANUAL
**BLUETOOTH[®] | 3" (76 mm) WEATHER
RATED SPEAKER AND AMPLIFIER SYSTEM**
FEATURING BUILT-IN AMPLIFIER



BOSS Audio Systems
3451 Lunar Court • Oxnard, CA 93030
www.bosssaudio.com
805-751-4853 Customer Service
Tech Support: www.bosssaudio.com/support



0120

The Bluetooth[®] word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by BOSS Audio Systems is under license. Other trademarks and trade names are those of their respective owners.

MC475BA Motorcycle/UTV Amplified Speaker System

Specifications

Operation Voltage	-----10~16 V
THD-----	<0.1%
S/N-----	>75 dB
Channel Separation-----	>50 dB
Frequency Response	-----50Hz - 15KHz
Master Speaker Wires	----- 5.5'
Slave Speaker Wires	----- 4.6'
Volume Control Wire	----- 4.9'
Audio Input Cable	----- 0.8'
Power Cable	----- 5.5'
In-Line Fuse/Power Cable	----- 4.9'
Bracket Size Range	----- 0.75" ~1.25"
Fuse Rating	----- 10A

MC475BA Motorcycle/UTV Amplified Speaker System

Contents

High-Performance, Weatherproof Speakers	----- 4 PCS
Mounting Hardware	----- 4 PCS
Ruber Mounting Shims	-----8 PCS
Power Plug with Fuse	----- 1 PC
Users Manual	----- 1 PC

Features:

- On/Off Switch
- Aux-In (3.5 mm)
- Speaker Clamp Mounts
- Weatherproof Volume Control
- High-Impact, High Temp Speaker Enclosures
- Weatherproof Speakers
- Bluetooth® Audio Streaming

MC475BA Motorcycle/UTV Amplified Speaker System

Installation


1. Screw the brackets to the bottom of the speakers.
2. Find a safe, ideal mounting location and fit the brackets over the chosen mounting bars.
3. Fasten the mounting screws after you review the safety of the mounting location.

Wiring

- 1) Remove the seat.
- 2) Route the fused power leads to the battery. *(keep away from moving parts and/or hot exhaust)*
- 3) Connect the RED ring terminal to the +12V post of the battery.
- 4) Connect the BLACK ring terminal to ground post of the battery.
- 5) Connect the power connector to the white mating connector leading to the speaker.


Power Switch

- 1) The switch is used to Power On/off the system.
- 2) It can be mounted near the volume control for easy access.
- 3) Reinstall the seat.

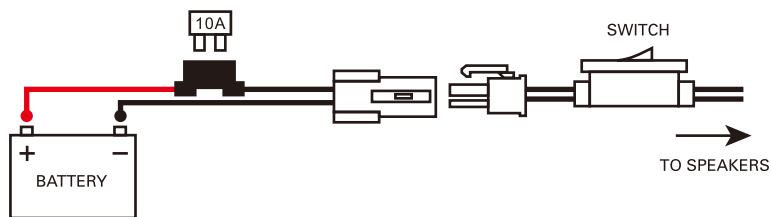

MC475BA Motorcycle/UTV Amplified Speaker System


Connections

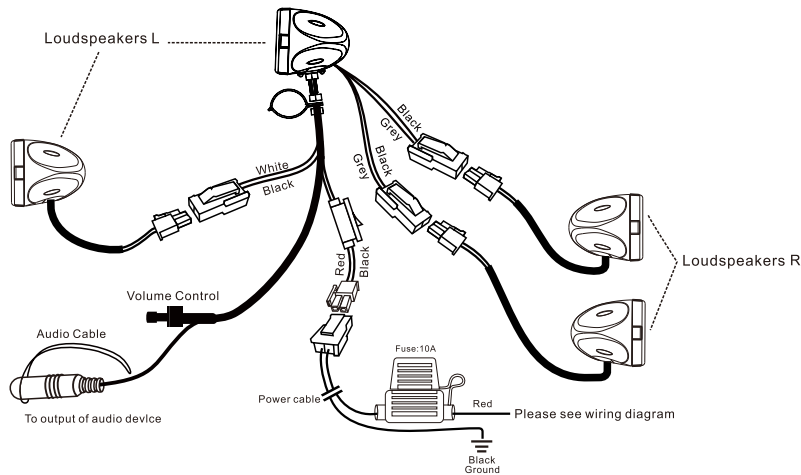

Amplifier and Loudspeaker Mounting

Install Reminder

The components and wiring should not be installed around any moving parts, keep away from ignition parts, fuel lines, or any hot exhaust



Speakers should not be installed where they might inhibit safety features on the vehicle (i.e. lights, horns, brake levers, etc...)

Bluetooth

To pair and connect your Bluetooth device to the MC475BA
Enter Settings > Bluetooth Menu > Search > “ Boss Audio MC475BA” >If Prompted to enter a passcode enter : “0000”