

CyberPower

GX950UC STANDBY UPS SYSTEM

Protects high end electronics from power interruptions and power surges.

The CyberPower GX950UC uninterruptible power supply (UPS) system provides surge protection for lightning-induced surges and other power events that can damage electronic equipment. This unit delivers enough battery backup to connected devices during a utility power failure, so you can perform a graceful shutdown to protect against the loss of data and damage to valuable electronics including computers, gaming consoles and PCs, and home networking equipment.

The GX950UC features a multi-color light bar with customizable colors and effects modes to adapt into your gaming set-up. The GX950UC has one USB-A and one USB-C charging port with 17W shared total output which gives you a faster charging time and can be used while on battery backup power. The slim profile allows for discrete installation and keyhole mounting slots allow for wall-mount applications.

With a \$125,000 connected equipment guarantee and a three-year warranty, you can trust CyberPower's commitment to the quality of the GX950UC.

SPECIFICATIONS

GENERAL	
Energy Saving	GreenPower UPS™ High-Efficiency
ENERGY STAR® certified	Yes
UPS Topology	Standby
INPUT	
Circuit Breaker	15 A
Cord Length	5 ft (1.5 m)
Input Frequency Range	47 Hz - 53 Hz 57 Hz - 63 Hz
Input Plug Type	NEMA 5-15P
Nominal Input Voltage	120 VAC
Plug Style	Right Angle - 45° Offset



TYPICAL APPLICATIONS


- Gaming Systems
- Laptop Computers
- Powering small electronics
- Home Networking
- Routers & Modems
- Personal Electronics

FEATURES

- Capacity: 950VA / 510W
- Topology: Standby
- Waveform: Simulated Sine Wave
- Output: 120 VAC +/- 5%
- Runtime (half/full): 7 minutes / 1 minute
- Plug type & cord: NEMA 5-15P, 5-ft. cord
- Outlets: 7 (2 surge only, 5 surge + battery backup)
- Outlet types: NEMA 5-15R
- USB-A charge ports: 1 (2.4A)
- USB-C charge ports: 1 (15W)
- Surge Protection: 890J
- ENERGY STAR® certified: Yes
- Warranty: Three-Year
- Connected Equipment Guarantee: \$125,000

OUTPUT	
On Battery Frequency	50/60 Hz +/- 1% (auto-sensing)
On Battery Voltage	120 VAC +/- 5%
On Battery Waveform	Simulated Sine Wave
Outlet Type	7 x NEMA 5-15R
Outlets - Battery & Surge Protected	5
Outlets - Surge-Only Protected	2
Outlets - Widely-Spaced	2
Outlets - Total	7
Output Power Factor	0.54

GX950UC
STANDBY UPS SYSTEM

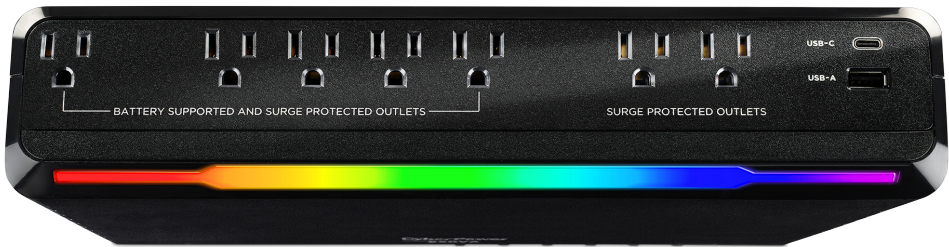

SPECIFICATIONS CONT.

OUTPUT CONT.	
Overload Protection	Internal Circuitry Limiting Circuit Breaker Protected
Typical Transfer Time	8 ms
USB Charge Port	Yes
USB Charge Port Amperage	2.4 Amps (Shared)
USB Charge Port Quantity	2
USB Charge Port Type	1 Type A 1 Type C
USB Charge Port Voltage	5 VDC
USB Charge Port Watts	17 Watts
VA	950 VA
Watts	510 W
BATTERY	
Battery Quantity	1
Battery Size	12 V / 6.5 Ah
Battery Type	Sealed Lead-Acid Battery
Runtime at Full Load	1 minute
Runtime at Half Load	7 minutes
Typical Recharge Time	8 hours
SURGE PROTECTION & FILTERING	
EMI/RFI Filtration	Yes
Surge Suppression	890 J
MANAGEMENT & COMMUNICATIONS	
Audible Alarms	Battery Mode / Low Battery Overload / Fault
LED Indicators	Power On / Wiring Fault
PHYSICAL	
Color	Black
Form Factor	Compact
Material of Construction	Plastic

PHYSICAL DIMENSIONS	
Physical Dimensions - Width/Height/Depth (cm)	32.41 x 13.8 x 7.01 cm
Physical Dimensions - Width/Height/Depth (mm)	324 x 138 x 70 mm
Physical Dimensions - Width/Height/Depth (in.)	12.76 x 5.4 x 2.76 in.
Weight (kg)	3.2 kg
Weight (lb)	7.05 lbs.
SHIPPING DIMENSIONS	
Shipping Dimensions - Width/Height/Depth (cm)	35.88 x 14.92 x 17.15 cm
Shipping Dimensions - Width/Height/Depth (mm)	358.78 x 149.23 x 171.45 mm
Shipping Dimensions - Width/Height/Depth (in)	14.125 x 5.875 x 6.75 in.
Weight (kg)	3.81 kg
Weight (lb)	8.4 lbs.
ENVIRONMENTAL	
Operating Elevation	0 - 10,000 ft (0 - 3,048 m)
Operating Relative Humidity	0 - 95% (non-condensing)
Operating Temperature	32 - 104 °F (0 - 40 °C)
Storage Elevation	0 - 50,000 ft (0 - 15,239 m)
Storage Relative Humidity	0 - 95% (non-condensing)
Storage Temperature	5 - 113 °F (-15 - 45 °C)
CERTIFICATIONS	
Environmental	RoHS Compliant
Safety	UL1778 / cUL FCC DOC Class B / CEC
WARRANTY	
CEG Amount	\$125,000
Connected Equipment Guarantee	Lifetime
Extended Warranty Option	WEXT5YR-U1A
Product Warranty	3-Year Limited Warranty