

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	05/17/11	TRC

ENGINEERING DATA:

ELECTRICAL:

FREQUENCY RANGE: DC-8 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.25:1MAX
Vrms: 335V RMS SEA LEVEL

MATERIALS/FINISHES:



BODY (SMA): PASSIVATED,STAINLESS STEEL
BODY (BNC): NICKEL PLATED BRASS
CONTACT: GOLD PLATED BECU
INSULATOR: TEFLON



MECHANICAL:

INTERFACES PER MIL-STD-348A

NOTES:

1. ALL DIMENSIONS ARE SHOWN FOR REFERENCE ONLY

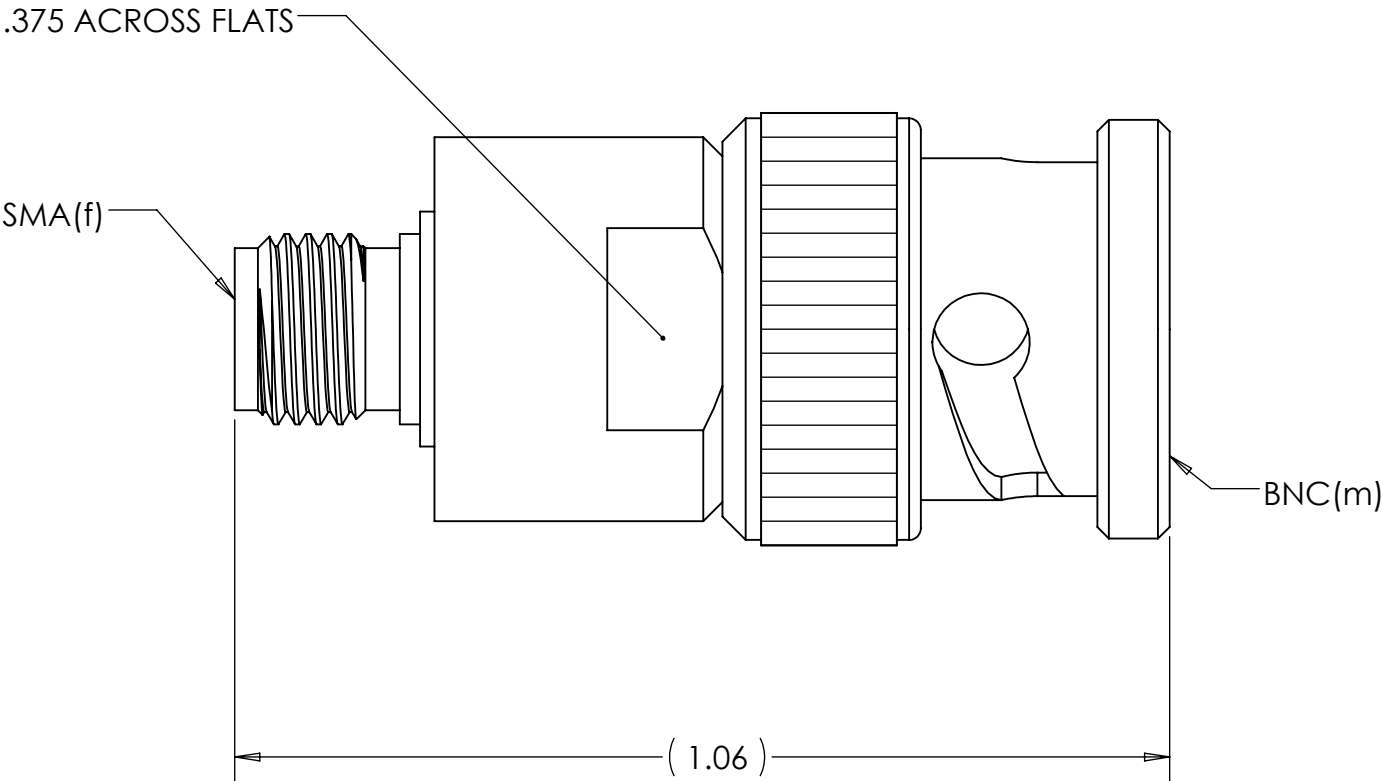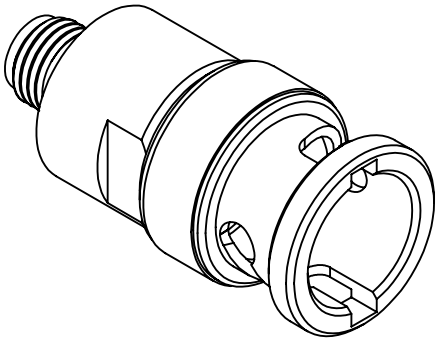

MATERIAL	DO NOT SCALE DRAWING		DRAWN TRC	DATE 05/12/11	<div> TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01960</div> <div>The Custom Interconnect Leader™</div>				
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		ENG APPR. TRC	DATE 05/17/11					
	TOLERANCES: FRACTIONS: ± 1/64 .XX : ± .01 .XXX: ± .005 ANGLES: ± 1/2° MACHINED SURFACES: <div>63/√</div>		MFG APPR.	DATE					
	COMMENTS:		OTHER APPR. AM	DATE 05/16/11	TITLE: BNC(m) TO SMA(f) STR ADAPTER				
THIRD ANGLE PROJECTION <div></div>									
surface area: sq inch			weight: lbs		SIZE B	DWG. NO. TRU-11692		REV -	
					CAGE CODE: 92180		SCALE: 4:1	SHEET 1 OF 1	