

MVP 5CCT PUCK

120V Puck Light

Long run lengths and field-adjustable color temperature render the MVP 5CCT Puck versatile and virtually unlimited in a wide range of applications — task, areas, display shelving, back bars, built-ins, etc. Minimalism in form factor and surface or recessed mount allows for more obscurity where necessary. With 12” and 24” linking cables, this plug-and-play solution to task lighting provides the contractor and customer the ultimate tool for illuminating important tasks or treasured articles.

- Available in field-switchable 5CCT (2700K | 3000K | 3500K | 4000K | 5000K)
- High color rendering index of 90+ CRI
- 120V AC input
- Low power consumption at 4W per puck
- Surface mount low profile and recessed mount
- 35,000 hour rated life
- cETLus listed for dry locations



MVP 5CCT PUCK QUICK SPECS

VOLTAGE	120V AC
WATTAGE	4W
LUMENS	Up to 230Lm
CCT	5CCT (2700K 3000K 3500K 4000K 5000K)
CRI	90+
MAX RUN	20 pucks
DIMMING	10-100% (TRIAC ELV)
BEAM ANGLE	120°
MOUNTING	Surface or recessed
RATING	cETLus Listed, dry locations
RATED LIFE	35,000 Hours


*Minimum loads may apply. Per the NEC, switched wall outlets cannot be used with wall dimmers.

**Lumens listed based on 4000K CCT setting

PROJECT:
TYPE:
LOCATION:
CATALOG NUMBER:



MVP 5CCT QUICK DIMENSIONS

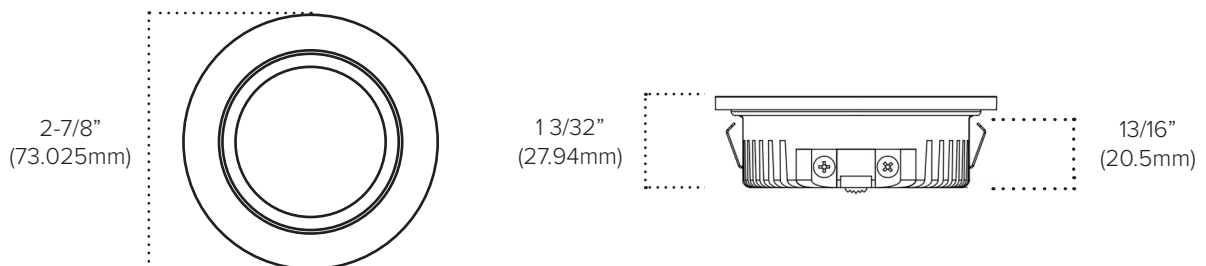


MVP ORDERING INFORMATION

ITEM NUMBER NAME	VOLTAGE	CCT	LUMENS	WATTAGE
MVP-1-5CCT-WH	120V	2700K 3000K 3500K 4000K 5000K	230Lm	4.3W
MVP-1-5CCT-BK	120V	2700K 3000K 3500K 4000K 5000K	230Lm	4.3W
MVP-1-5CCT-WH-B	120V	2700K 3000K 3500K 4000K 5000K	230Lm	4.3W
MVP-1-5CCT-BK-B	120V	2700K 3000K 3500K 4000K 5000K	230Lm	4.3W

Single Puck Kits Include: (1) Puck with 6" lead wire, (1) 6' power cord with roll switch, Mounting screws

MVP 5CCT INSTALLATION RECOMMENDATION

Daisy Chain Installation

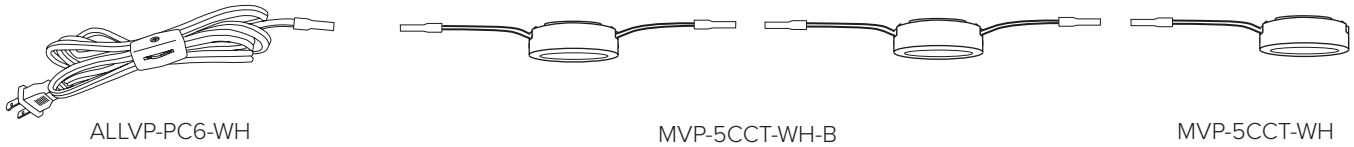

MVP 5CCT ACCESSORIES

PART NUMBER	DESCRIPTION
ALLVP-PC6	6ft Black 120V Power Cable + Plug w/ Inline Rotary Switch
ALLVP-PC6-WH	6ft White 120V Power Cable + Plug w/ Inline Rotary Switch
ALLVPEX12	1ft Black Linking cable; 18AWG wire with male/female connectors
ALLVPEX24	2ft Black Linking cable; 18AWG wire with male/female connectors
ALLVPEX12WH	1ft White Linking cable; 18AWG wire with male/female connectors
ALLVPEX24WH	2ft White Linking cable; 18AWG wire with male/female connectors



ALLVP-PC6



ALLVP-PC6-WH



ALLVPEX BLACK



ALLVPEX WHITE

RECOMMENDED POWER SUPPLIES

PART NUMBER	DESCRIPTION	FINISH	APPLICATION	PRIMARY & SECONDARY	TOTAL WATTAGE	LISTING	DIMENSIONS
ALLSBOX	Slimline Hardwire Box with (2) Molex outlets and On/Off switch;	Black	Dry location	120V AC	86 x 2 (5A Max)	cURus	4"x2.5"x1"
ALLSBOX-WH-B	(Required for Hardwire operation)	White	Dry location	120V AC	86 x 2 (5A Max)	cURus	4"x2.5"x1"
ALLVP-PC6	6ft power cord with slide on plug, roll switch, and female plug	Black	Dry location	120V AC	86	cULus	6ft length
ALLVP-PC6-WH		White	Dry location	120V AC	86	cULus	6ft length