


PART#: 14/2 k5502

PART#: k5502

DESCRIPTION: 2C/14 AWG 105 STRAND OXYGEN FREE COPPER
SPEAKER CABLE,PVC JKT

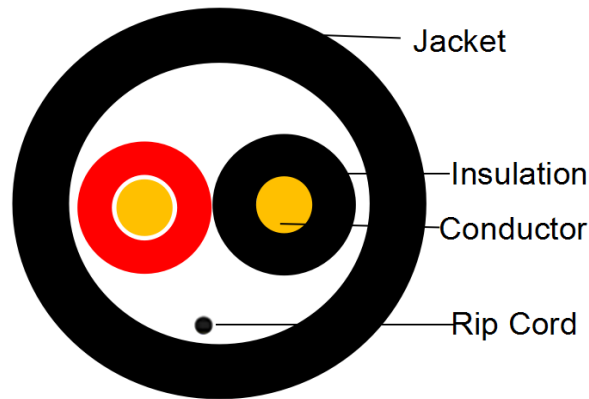

Regulatory

UL : UL 444 & UL 13, Type (UL) CMR/CL2R c(UL)

EU RoHS 2011/65/EU Compliant

EN50575: 2014 REACTION TO FIRE CLASS Eca

Application: Speaker cable

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	14AWG X 2C(2.11mm ²)
	Construction	105/0.16mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.33mm
	AVG.Thickness	0.36mm
	Diameter	2.70mm +/-0.10mm
	Colors	Black & Red
Jacket	Material	PVC
	Min.Thickness	0.54mm
	AVG.Thickness	0.60mm
	Diameter	6.30mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius	Min 15D/95mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Conductor Resistance	Max 9.2ohm/km at 20°C

Insulation Resistance	Min 50MΩ*km at 20°C		
Dielectric Strength	Min AC1.5KV		
Rated Voltage	Max 80Volts		
Marking:			
Packaging:			
Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
11kgs/24.251lbs	320X260X320	500ft/Box	36