AXOR

hansgrohe

Product Picture

Custom finish

Certicates/approvals

UPC
C   ®

MAP

ADA

Drawing

3⁄4"
6 1⁄8"
4 3⁄8"
1 3⁄4"
1 3⁄4"
2 1⁄4"
2 1⁄8" - 3 1⁄4"
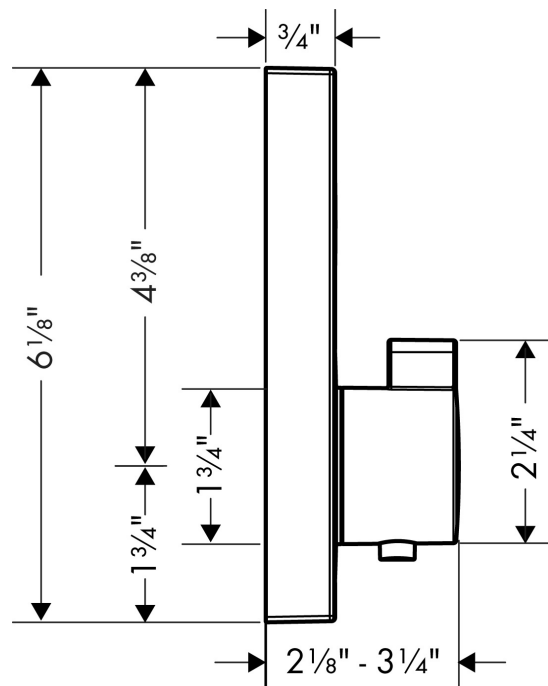
Technology

Select   SELECT

Features

• Select push-button on/off control for 1 outlet
• Flow: 7.0 GPM (26.5 L/Min)
• Thermostatic cartridge, Start/stop cartridge
• Anti-scald 100° safety stop
• Optimized for water-efficient shower products
• Thermostat is delivered with On/Off button