


# DS-9508/9516NI-S Network Video Recorder



## Key Features

- Supports Hikvision and third party IP cameras for network storage
- Recording storage configurable for each channel
- Scheduled and events recording configurable for each camera
- Search of recorded files by event type
- HDD management in groups

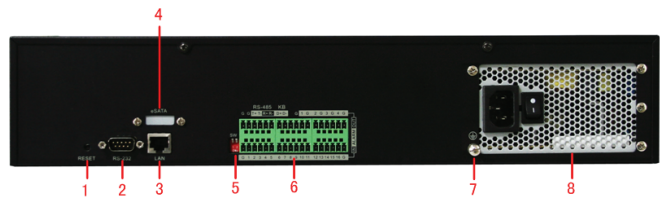

- ① RESET
- ② RS-232 Serial Interface
- ③ LAN (10/100/1000Mbps Self-adaptive UTP Ethernet interface)
- ④ eSATA Backup/Extended Storage Interface(optional)
- ⑤ RS-485 Matched Resistance Switch
- ⑥ RS-485 Serial Interface, ALARM IN, ALARM OUT
- ⑦ GND
- ⑧ 100~240VAC Power Input

## Specifications

		DS-9508NI-S	DS-9516NI-S
Video/Audio Input	Video Input	Up to 8ch IP or 4ch 720P Megapixel or 2ch UXGA Megapixel	Up to 16ch IP or 8ch 720P Megapixel or 4ch UXGA Megapixel
Hard Disk	Sata Interface	4	8
	Capacity	Up to 2TB	
External Interface	Network interface	1, RJ45 10M/100M/1000M adaptive UTP Ethernet interface	
	Serial interface	1 RS-232, 1 RS-485 (for PTZ control), 1 RS-485 (for Keyboard)	
	USB interface	2, USB2.0	
	Alarm in	16	
	Alarm out	4	
Others	Power supply	100~240VAC, 47~63Hz	
	Consumption	≤50W (without hard disk or DVD-R/W)	
	Working temperature	0°C ~ 50°C	
	Working humidity	10% ~ 90%	
	Chassis	19" standard 1.5U Chassis	19" standard 2U Chassis
	Dimension	442mm(D)×371mm(W)×70mm(H)	442mm(D)×457mm(W)×88mm(H)