

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE — These specifications are for USA standards only. Round Straight Steel is a general purpose light pole for up to 30-foot mounting heights. This pole provides a robust yet cost effective option for mounting area lights and floodlights.

CONSTRUCTION —

Pole Shaft: The pole shaft is of 0.120" uniform wall thickness and is made of a weldable-grade, hot-rolled, commercial-quality steel tubing with a minimum yield of 42,000 psi. Shaft is one-piece with a full-length longitudinal high-frequency electric resistance weld. Uniformly round in cross-section down length of shaft with no taper. Standard shaft diameters are 3", 4", 4.5" and 5". 6" diameter shaft available by quote. Shaft wall thickness of .180" is available with certain tube diameters.

Pole Top: Options include tenon top, drilled for side mount fixture, 4" tenon with drilling (includes extra handhole) and open top. Side drilled and open top poles include a removable press-fit, black, low density polyethylene top cap.

Handhole: A reinforced handhole with grounding provision is provided at 12" or 18" from the base end of the pole assembly on side A. Every handhole includes a cover and cover attachment hardware. 2.5" x 5" rectangular handhole is provided on pole.

Base Cover: A two-piece ABS round plastic full base cover is provided with each pole assembly. Additional base cover options are available upon factory request. Options include fabricated two-piece sheet steel. All base covers are finished to match pole.

Anchor Base/Bolts: Anchor base is fabricated from hot-rolled carbon steel plate that conforms with ASTM A36. Anchor bolts conform to ASTM F1554 Grade 55 and are provided with two hex nuts and two flat washers. Bolts have an "L" blend on one end. All anchor bolts are hot-dipped galvanized a minimum of 12" nominal on the threaded end. Anchor bolts are made of steel rod having a minimum yield strength of 55,000 psi and a yield strength of 75,000 psi to 95,000 psi.

HARDWARE — All structural fasteners are high-strength galvanized carbon steel. All non-structural fasteners are galvanized or zinc-plated carbon steel or stainless steel.

FINISH — Extra durable standard powder-coat finishes include Dark Bronze, White, Black, Medium Bronze and Natural Aluminum colors. Classic finishes include Sandstone, Charcoal Gray, Tennis Green, Bright Red and Steel Blue colors. Architectural Colors and Special Finishes are available by quote and include, but are not limited to Hot-dipped Galvanized, Paint over Hot-dipped Galvanized, RAL Colors, Custom Colors and Extended Warranty Finishes. Factory-applied primer paint finish is available for customer field-paint applications.

BUY AMERICAN ACT — Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations. Please refer to www.acuitybrands.com/buy-american for additional information.

WARRANTY — 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

NOTE: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.



Anchor Base Poles

RSS

ROUND STRAIGHT STEEL



RSS Round Straight Steel Pole

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: RSS 20 4-5B DM19 DDBXD

RSS	Nominal fixture mounting height	Nominal shaft base size/wall thickness ¹	Mounting ²	Options	Finish
RSS	8'-30' (for 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.) (See technical information table for complete ordering information.)	3B 3" 11ga (.120") 4B 4" 11ga (.120") 4-5B 4.5" 11ga (.120") 5B 5" 11ga (.120") (See technical information table for complete ordering information.)	Tenon mounting PT Open top T20 2-3/8" O.D. (2" NPS) T25 2-7/8" O.D. (2-1/2" NPS) T30 3-1/2" O.D. (3" NPS) T35 4" O.D. (3-1/2" NPS) <u>KAC/KAD/KSE/KSF/KVR/KVF Drill mounting³</u> DM19 1 at 90° DM28 2 at 180° DM28PL 2 at 180° with one side plugged DM29 2 at 90° DM32 3 at 120° DM49 4 at 90° <u>CSX/DSX/RSX/AERIS™/OMERO™/KAX Drill mounting³</u> DM19AS 1 at 90° DM28AS 2 at 180° DM29AS 2 at 90° DM32AS 3 at 120° DM39AS 3 at 90° DM49AS 4 at 90° <u>RAD drill mounting^{3,4}</u> DM19RAD 1 at 90° DM28RAD 2 at 180° DM29RAD 2 at 90° DM32RAD 3 at 120° DM39RAD 3 at 90° DM49RAD 4 at 90° <u>ESX Drill mounting³</u> DM19ESX 1 at 90° DM28ESX 2 at 180° DM29ESX 2 at 90° DM32ESX 3 at 120° DM39ESX 3 at 90° DM49ESX 4 at 90°	Shipped installed VD Vibration damper ⁵ HAXy Horizontal arm bracket (1 fixture) ^{6,7} FDLxy Festoon outlet less electrical ^{6,8} CPL12/xy 1/2" coupling ⁶ CPL34/xy 3/4" coupling ⁶ CPL1/xy 1" coupling ⁶ NPL12/xy 1/2" threaded nipple ⁶ NPL34/xy 3/4" threaded nipple ⁶ NPL1/xy 1" threaded nipple ⁶ EHHxy Extra handhole ^{6,9} STLHHC Steel handhole cover (standard is plastic, finish is smooth) ¹⁰ FBCSTL2PC 2 Piece steel base cover (standard is plastic) ¹⁰ IC Interior coating ¹¹ L/AB Less anchor bolts (Include when anchor bolts are not needed) TP Tamper resistant handhole cover fasteners NEC NEC 410.30 compliant gasketed handhole (Not UL Labeled) UL UL listed with label (Includes NEC compliant cover) BAA Buy America(n) Act Compliant ¹² VM/original order# Match pole to prior order or project ¹³	Super durable paint colors DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DSSXD Sandstone DGCXD Charcoal gray DTGXD Tennis green DBRXD Bright red DSBXD Steel blue DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white Other finishes GALV Galvanized finish Architectural colors and special finishes¹⁴ [PAINT] GALV Paint over galvanizing VP30 3 year warranty extension VP53 5 year warranty extension RAL#### Use designated Lithonia Lighting nomenclature in brochure Custom color Nomenclature assigned through Customer Care "Custom Color Process"

NOTES:

- Wall thickness will be signified with a "B" (11 Gauge) or a "F" (7-Gauge) in nomenclature. "B" - .120" | "F" - .180"
- PT open top poles include top cap. When ordering tenon mounting and drill mounting for the same pole, specify as drilling option/tenon option. The combination includes a required extra handhole.
Example: DM28/T20.
- Refer to the fixture spec sheet for the correct drilling template pattern and orientation compatibility.
- DM19RAD, DM28RAD and DM32RAD require a minimum top O.D. of 4". DM29RAD, DM39RAD and DM49RAD require a minimum top O.D. of 4.25".
- VD not available with 3" pole. On 4" and 5" poles, VD cannot be installed if provisions (EHH, FDL, NPL, CPL) are located higher than 2/3 of the pole's total height.
Example: Pole height is 25ft, A provision cannot be placed above 16ft.
- Specify location and orientation when ordering option.
For "x": Specify the height above the base of pole in feet or feet and inches; separate feet and inches with a "-".
Example: 5ft = 5 and 20ft 3in = 20-3
For "y": Specify orientation from handhole (A,B,C,D) Refer to the Handhole Orientation diagram below.
Example: 1/2" coupling at 5' 8", orientation C = CPL12/5-8C
- Horizontal arm is 18" x 2-3/8" O.D. tenon standard, with radius curve providing 12" rise and 2-3/8" O.D. If ordering two horizontal arm at the same height, specify with HAXy.
Example: HA20BD.
- FDL does not come with GFCI outlet or handhole cover. These must be supplied by contractor or electrician.
- Combination of tenon-top and drill mount includes extra handhole. EHH includes cover.
- Plastic hand hole cover and base covers come standard with all poles. Items ship separately. Additional parts can be ordered as replacements.
- Provides enhanced corrosion resistance. N/A with GALV.
- Use when mill certifications are required.
- Must add original order number. Not for replacement parts or post sales issues, contact tech support or post sales teams. VM is used to ensure poles match in appearance exactly from order to order, on a single project site. A common use case would be a multi-phase project with multiple orders.
Example: VM/010-36784
- Must be quoted through AQD. Finishes do not require RFA. RAL colors available are shown in "Architectural Colors brochure". Lead times may be extended up to 2 weeks due to paint procurement.

Accessories: Order as separate catalog number.	
PL DT20	Plugs for ESX drillings
PL DT8	Plugs for DMxxAS drillings
FVD xxFT	Field installed vibration damper (snake style)

RSS Round Straight Steel Pole

TECHNICAL INFORMATION — EPA (ft ²) with 1.3 gust										
Catalog number	Nominal shaft length (ft)*	Pole shaft size (in x ft)	Wall thickness (in)	80 mph	Max weight	90 mph	Max weight	100 mph	Max weight	Approximate ship weight (lbs.)
RSS 8 4-5B	8	4.5 x 8.0	0.120	24.7	630	19.7	495	16.0	430	55
RSS 10 3B	10	3.0 x 10.0	0.120	10.0	250	7.7	190	6.0	175	55
RSS 10 4B	10	4.0 x 10.0	0.120	19.1	480	15	375	12.2	305	70
RSS 10 4-5B	10	4.5 x 10.0	0.120	24.5	615	19.5	490	15.8	395	75
RSS 12 3B	12	3.0 x 12.0	0.120	7.7	195	5.8	145	4.4	130	60
RSS 12 4B	12	4.0 x 12.0	0.120	15.0	390	11.8	300	9.5	240	80
RSS 12 4-5B	12	4.5 x 12.0	0.120	19.8	495	15.7	395	12.7	320	85
RSS 14 3B	14	3.0 x 14.0	0.120	6.0	175	4.4	130	3.3	90	70
RSS 14 4B	14	4.0 x 14.0	0.120	12.2	305	9.4	250	7.6	195	90
RSS 14 4-5B	14	4.5 x 14.0	0.120	16.2	405	12.8	320	10.3	260	95
RSS 15 4-5B	15	4.5 x 15.0	0.120	12.0	300	9.5	250	7.5	200	96
RSS 16 3B	16	3.0 x 16.0	0.120	4.6	125	3.2	100	2.3	60	80
RSS 16 4B	16	4.0 x 16.0	0.120	9.6	250	7.4	185	5.9	150	100
RSS 16 4-5B	16	4.5 x 16.0	0.120	13.1	330	10.2	265	8.2	205	105
RSS 18 3B	18	3.0 x 18.0	0.120	3.4	90	2.3	60	1.4	70	90
RSS 18 4B	18	4.0 x 18.0	0.120	7.6	190	5.7	180	4.5	130	110
RSS 18 4-5B	18	4.5 x 18.0	0.120	10.5	265	8.2	210	6.5	165	115
RSS 20 3B	20	3.0 x 20.0	0.120	2.4	100	1.4	75	--	--	100
RSS 20 4B	20	4.0 x 20.0	0.120	6.0	150	4.45	150	3.45	125	120
RSS 20 4-5B	20	4.5 x 20.0	0.120	8.5	215	6.6	165	5.2	130	130
RSS 20 5B	20	5.0 x 20.0	0.120	11.75	300	9.1	230	7.25	180	145
RSS 22 4-5B	22	4.5 x 22.0	0.120	6.0	150	4.5	125	3.75	100	134
RSS 25 4B	25	4.0 x 25.0	0.120	2.85	100	1.95	75	1.35	75	145
RSS 25 4-5B	25	4.5 x 25.0	0.120	4.8	130	3.6	90	2.7	90	145
RSS 25 5B	25	5.0 x 25.0	0.120	7.25	180	5.5	150	4.25	150	180
RSS 30 4-5B	30	4.5 x 30.0	0.120	2.3	80	1.5	75	1.0	60	185
RSS 30 5B	30	5.0 x 30.0	0.120	4.2	150	3	125	2.25	100	210

NOTE: EPA values are based ASCE 7-93 wind map.

*For 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.

RSS Round Straight Steel Pole



TECHNICAL INFORMATION — EPA (ft²) WITH 3-SECOND GUST PER AASHTO 2013

Series	Mounting Height (ft)*	Shaft Base Size	90 MPH	Max. weight	100 MPH	Max. weight	110 MPH	Max. weight	120 MPH	Max. weight	130 MPH	Max. weight	140 MPH	Max. weight	150 MPH	Max. weight	Approximate ship weight (lbs.)
RSS	8	4-5B	18.5	463	15	375	13	325	11	275	9.5	238	8	200	7	175	55
RSS	10	3B	6	150	5	125	4	100	3.5	88	2.5	63	2	50	2	50	55
RSS	10	4B	12	300	9.5	238	8	200	6.5	163	5.5	138	5	125	4.5	113	70
RSS	10	4-5B	15.5	388	12.5	313	10.5	263	9	225	7.5	188	6.5	163	6	150	75
RSS	12	3B	5	125	4	100	3	75	2.5	63	2	50	1.5	38	1	25	60
RSS	12	4B	10	250	8	200	6.5	163	5.5	138	4.5	113	4	100	3.5	88	80
RSS	12	4-5B	13	325	10.5	263	9	225	7.5	188	6.5	163	5.5	138	4.5	113	85
RSS	14	3B	4	100	3	75	2.5	63	2	50	1.5	38	1	25	0.5	13	70
RSS	14	4B	8.5	213	6.5	163	5.5	138	4	100	3.5	88	3	75	2.5	63	90
RSS	14	4-5B	11	275	9	225	7	175	6	150	5	125	4.5	113	4	100	95
RSS	15	4-5B	10	250	8	200	6.5	163	5.5	138	4.5	113	4	100	3.5	88	96
RSS	16	3B	3	75	2.5	63	1.5	38	1	25	0.5	13	0.5	13	-	-	80
RSS	16	4B	7	175	5.5	138	4	100	3	75	2.5	63	2	50	2	50	100
RSS	16	4-5B	9	225	7	175	6	150	5	125	4	100	3.5	88	3	75	105
RSS	18	3B	2.5	63	1.5	38	1	25	0.5	13	-	-	-	-	-	-	90
RSS	18	4B	5.5	138	4	100	3	75	2.5	63	2	50	1.5	38	1	25	110
RSS	18	4-5B	7.5	188	6	150	4.5	113	4	100	3	75	2.5	63	2	50	115
RSS	20	3B	2	50	1	25	0.5	13	-	-	-	-	-	-	-	-	100
RSS	20	4B	4.5	113	3	75	2	50	1.5	38	1	25	1	25	0.5	13	120
RSS	20	4-5B	6	150	4.5	113	3.5	88	3	75	2.5	63	2	50	1.5	38	130
RSS	20	5B	8	200	6.5	163	5.5	138	4.5	113	3.5	88	3	75	2.5	63	145
RSS	22	4-5B	5	125	3.5	88	2.5	63	2	50	1.5	38	1	25	1	25	134
RSS	25	4B	2.5	63	1	25	0.5	13	-	-	-	-	-	-	-	-	145
RSS	25	4-5B	3.5	88	2	50	1.5	38	1	25	0.5	13	-	-	-	-	145
RSS	25	5B	5	125	3.5	88	3	75	2	50	1.5	38	1.5	38	1	25	180
RSS	30	4-5B	1.5	38	-	-	-	-	-	-	-	-	-	-	-	-	185
RSS	30	5B	2.5	63	1.5	38	1	25	0.5	13	-	-	-	-	-	-	210

NOTE: AASHTO 2013 criteria is the most conservative existing EPA calculation. For poles not showing EPA values under AASHTO 2013, EPA values may exist under commercial criteria (see table above).

*For 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.


BASE DETAIL

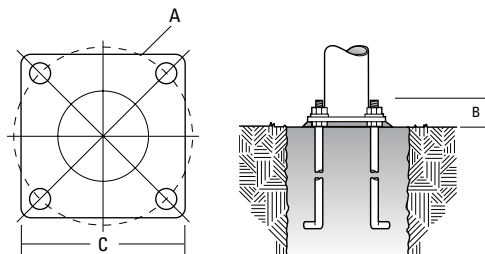

ANCHORAGE AND TEMPLATE INFORMATION

Shaft base size	Bolt circle A	Bolt projection B	Base square C	Template description	Anchor bolt description	Bolt size (in. x in. x in.)
3"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3
4"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3
4.5"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3
5"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3

HANDHOLE ORIENTATION



IMPORTANT INSTALLATION NOTES:

- Do not erect poles without having fixtures installed.
- Factory-supplied templates must be used when setting anchor bolts. Lithonia Lighting will not accept claim for incorrect anchorage placement due to failure to use factory template.
- If poles are stored outside, all protective wrapping must be removed immediately upon delivery to prevent finish damage.
- Lithonia Lighting is not responsible for the foundation design.

CAUTION: These specifications are intended for general purposes only. Lithonia Lighting reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.