

# EXL2-10 LED Edge Lit Exit Sign

The EXL2-10 LED Edge Lit Exit Series presents a contemporary design with ease of installation and dependability in mind. Constructed of impact-resistant, optically clear acrylic, choose from clear single-faced or mirrored double-faced panels. High output LEDs deliver an indirect, evenly illuminated edge-lit exit sign with exceptional light distribution and a maintenance-free nickel-cadmium battery for long life. The EXL2-10 Series offers flexible installation for surface ceiling, wall or end mount options along with field adjustable chevrons for universal configuration based on your application's directional needs.

## Construction

- Specification grade aluminum extrusion design
- Optically clear, impact resistant acrylic panels with lettering
- Single or double faced configurations available

## Electrical

- Maintenance-free NiCad battery provides 90-minute emergency operation
- Low voltage disconnect eliminates deep discharge
- Brown-out, short circuit and voltage surge protection
- LED Indicator Light & Self-Test Push Button Switch
- UL Listed to Standard 924 (Emergency Lighting)
- NFPA 101 (Life Safety Code) compliant
- NFPA 70 (National Electrical Code) compliant

## Installation

- No special tools required
- Mounting plate allows for surface ceiling, wall or end mount options
- Field-installable, removable chevron directional indicators for all configurations
- Chevron mounting template simplifies directional application
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel
- Damp Location Rated

## Listings


- Meets FCC Part 15, Subpart B, Class B standards for conducted and radiated emissions

## Finish

- Satin finished aluminum housing
- Available with either clear (single faced) or mirrored backing (double face)
- Available with either green or red lettering


## Warranty

- 1-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

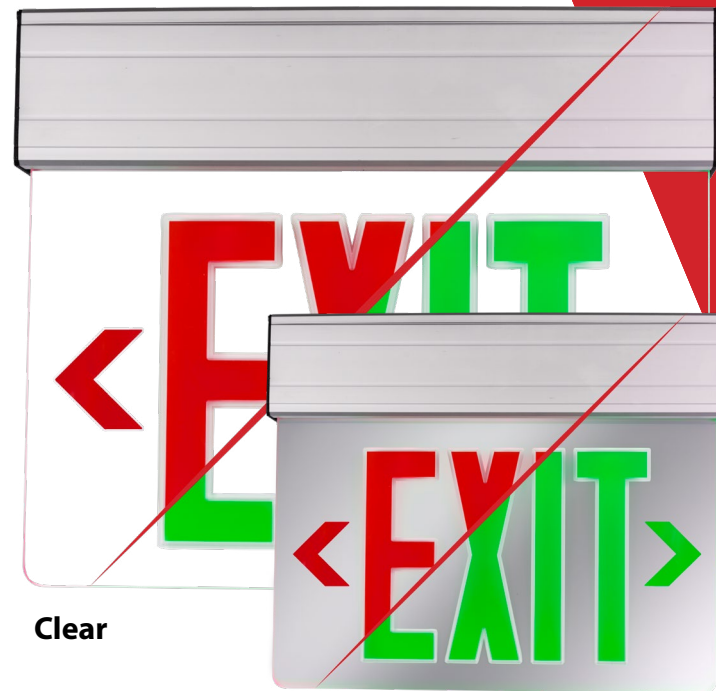

Clear

Mirror

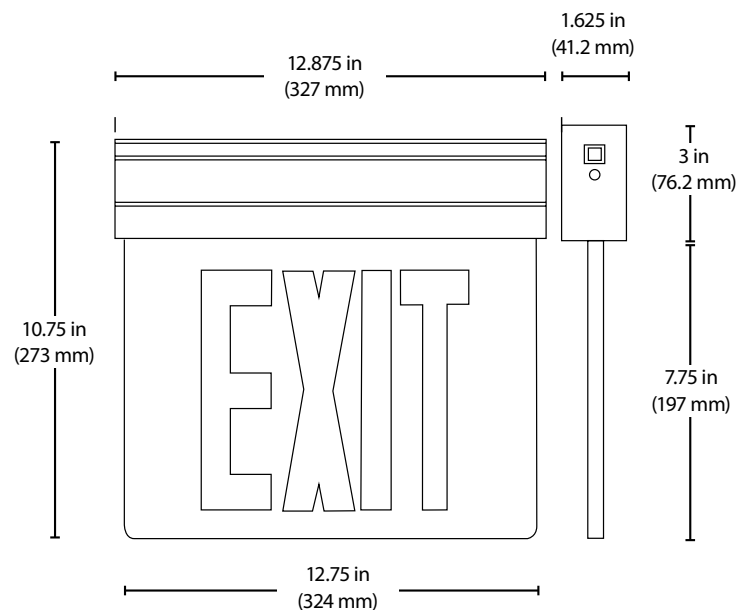

Product Information	
Input Voltage (VAC)	120/277
Power Draw (W)	2.3W
Emergency Operation	Minimum 90 Minutes



# Applications



The EXL series can be installed in many applications such as doorways, hallways, warehouses, etc.

# Installation



The EXL2-10 does not require any special tools. Mounting the EXL2-10 into the ceiling, or wall is easy with the included mounting plate.

The EXL2-10 has an easily accessible test button outside the fixture along with LED ready light. Removable chevron directional indicators help simplify the installation.



Ordering Information (AC or EM only)					
Series	Version/Voltage	Housing Color	Backing Material	Letter Color	Number of Sides
EXL2	10UNVAC (1/120/277V, AC ONLY Version)	AL (Aluminum)	CL (Clear-single only)	G (Green)	1 (Single)
	10UNV (1/120/277VAC EM ONLY Version)		MR (Mirrored-double only)	R (Red)	2 (Double)