
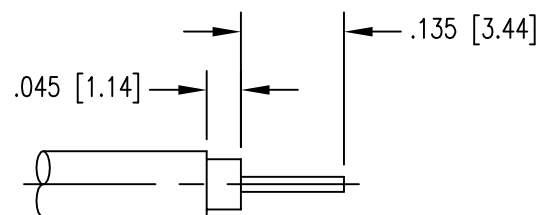
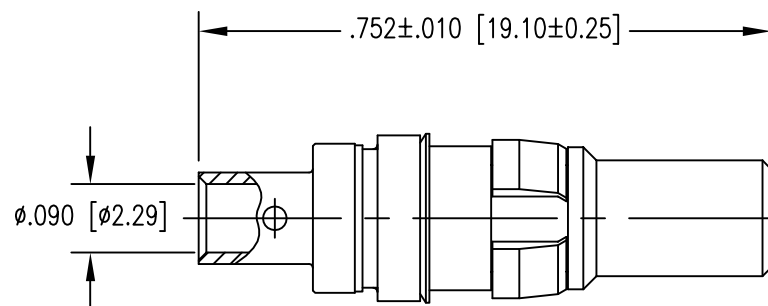


DWG. NO.		260-510-0850G	
REV	DESCRIPTION	BY DATE	APP
B	REVISED CONTACT PER ECR 8576	PSM 06/15/05	DCam

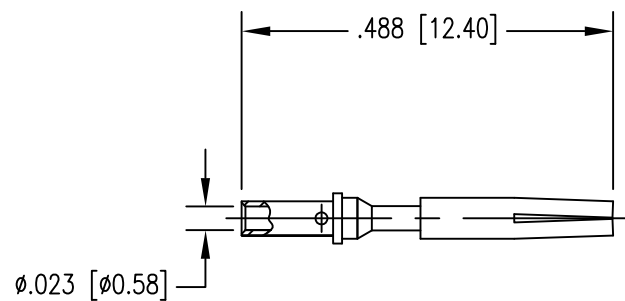

CABLE TRIMMING DIMENSIONS

NOTES:

1. MATERIALS:

BODY: BRASS PER ASTM B16
 CONTACT: COPPER ALLOY
 INSULATOR: TEFLON PER ASTM D1710
 CLIP RING: BERYLLIUM COPPER PER ASTM B194
 SPRING WASHER: PHOSPHOR BRONZE PER ASTM B103

2. FINISH:

CLIP RING: .000100 MIN. NICKEL PER QQ-N-290 OVER
 COPPER FLASH
 SPRING WASHER: .000005 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 ALL OTHER METAL PARTS: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290

3. FOR USE WITH .085 SEMI-RIGID CABLE OR EQUIVALENT.

4. FOR CABLING PROCEDURES USE CAP 5-15 WITH TRIMMING DIMENSIONS SHOWN.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]				<i>NORTHROP GRUMMAN</i>				
TOLERANCES: DECIMALS .XX ± .01 [0.254] XXX ± .005 [0.127] ANGLES ± 2°				SCALE: 4:1				
CUSTOMER DRAWING								
TITLE				Winchester Electronics 400 Park Road Watertown, CT 06795				
RDM 50 OHM PLUG								
DRAWN JWH	DATE 8/13/02	CHECKED JED	DATE 8/26/02	A	260-510-0850G	SMT. 1	OF 1	REV. B
APPROVED JFM	DATE 8/22/02	APPROVED KJT	DATE 8/26/02					