


3-OUTLET SURGE PROTECTOR with 2 USB PORTS

DS304UCMT/DS304UCBL

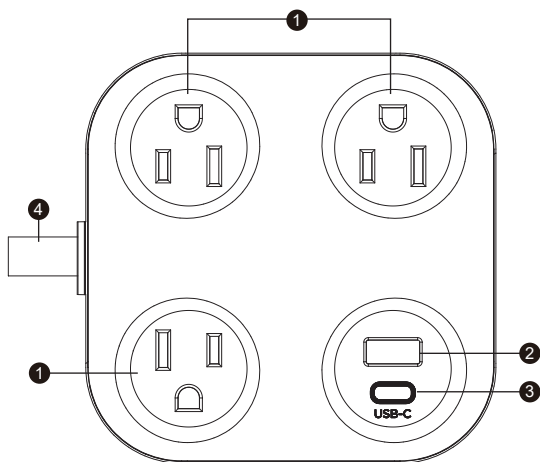

FEATURES

1. Standard Grounded Outlets (3)
2. USB-A Charging Port (1)
3. USB-C Charging Port (1)
4. Power Cord

SPECIFICATIONS

Model Number:	DS304UCMT/DS304UCBL
Outlets:	Standard Grounded Outlets (3)
Power Cord Length:	4 ft
Surge Protection:	1000 Joules
USB-A Charging Port (1):	5V/2.4A
USB-C Charging Port (1):	5V/3A
USB Total Output:	18W
Electrical Rating:	125V/15A/1875W
UL Clamping Voltage:	UL1449 4th/800V(L-N)
Maximum Peak Current	L-N 30,000 A
Response Time:	Less than 1 nanosecond

⚠ WARNING: This product can expose you to chemicals including vinyl chloride and bisphenol A (BPA), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

CAUTION

TO REDUCE THE RISK OF ELECTRIC SHOCK:

Use only in dry locations and only indoors.

DO NOT plug into another relocatable power tap.

DO NOT "daisy chain" surge protectors.

DO NOT use with any aquarium equipment.

DO NOT use if properly grounded outlets are not available.

DO NOT install this device if there is less than 10 meters (30 feet) of wire between the electrical outlet and electrical service panel.

DO NOT use for medical or life support equipment. This device features an internal protection that will disconnect the surge protective component at the end of its useful life, but it will maintain unprotected power to the load.

FOR MORE INFORMATION

Visit CyberPowerSystems.com for more information regarding:

- Product information and certifications
- Product warranty
- Connected equipment guarantee

TECHNICAL SUPPORT

Visit: CyberPowerSystems.com/support

Toll-Free: 1-877-297-6937

© 2025 Cyber Power Systems (USA), Inc. All rights reserved.

CyberPower and the CyberPower logo are trademarks of Cyber Power Systems, Inc., and/or affiliates, which are registered in many countries and regions. All other trademarks are the property of their respective owners.