



GSD

1999-10-9

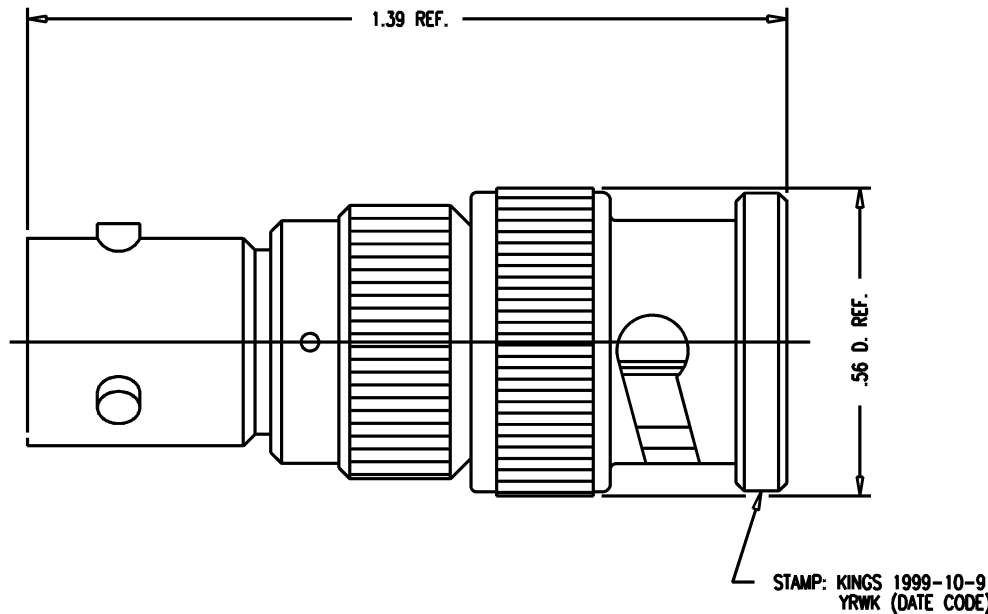

NOTES:

1. INTERFACES PER MIL-STD-348, FIGS. 301-1 & 201-2.
2. MATERIALS:
 - INSULATORS: TEFLON, ASTM-D-1457
 - GASKET: SILICONE RUBBER, ZZ-R-765
 - CENTER CONTACT } BER. COPPER, ASTM-B-196
 - OUTER CONTACT }
 - SPRING WASHER }
 - ALL OTHER METAL PARTS: BRASS, ASTM-B16
3. FINISHES:
 - CENTER CONTACTS: HARD GOLD PLATE, PER MIL-G-45204
 - SPRING WASHER }
 - OUTER CONTACT } SILVER PLATE, PER QQ-S-365
 - INTER. CONTACT }
 - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
4. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: NON-CONSTANT
 - WORKING VOLTAGE: 400 VRMS
 - FREQUENCY RANGE: DC TO 500 MHz.



SCHEMATIC

GSD

REVISIONS

ISSUE	CHANGES
0	ER 33532 WJM 11/13/91
1	CN 33453 C KH 05/22/92
2	CN 38253 C BDH 03/15/01

WJM1536

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

ADAPTER, F-M, TRB-BNC
ISOLATED GROUND

DRAWN WJM	DATE 11/13/91
DESIGN MJB	DATE 12/02/91
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

1999-10-9