
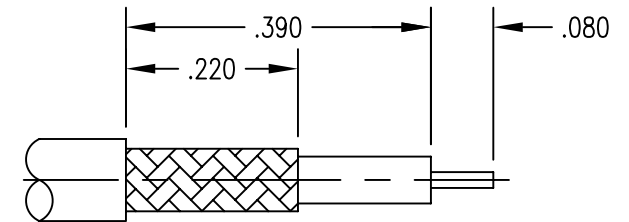

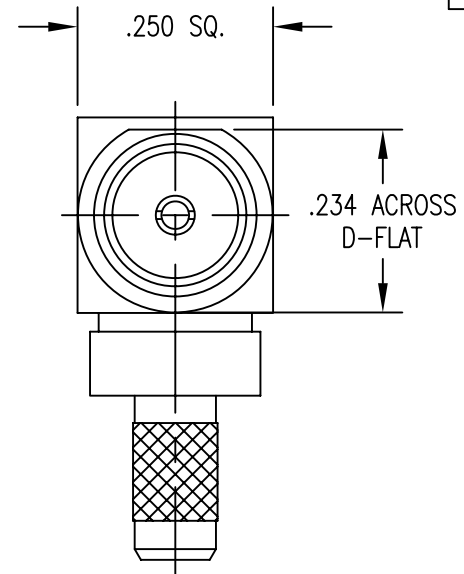


DWG. NO.		SD353-975-0630N	
REV	DESCRIPTION	BY DATE	APPD
A	ER15710	PSM 05/27/09	DCam

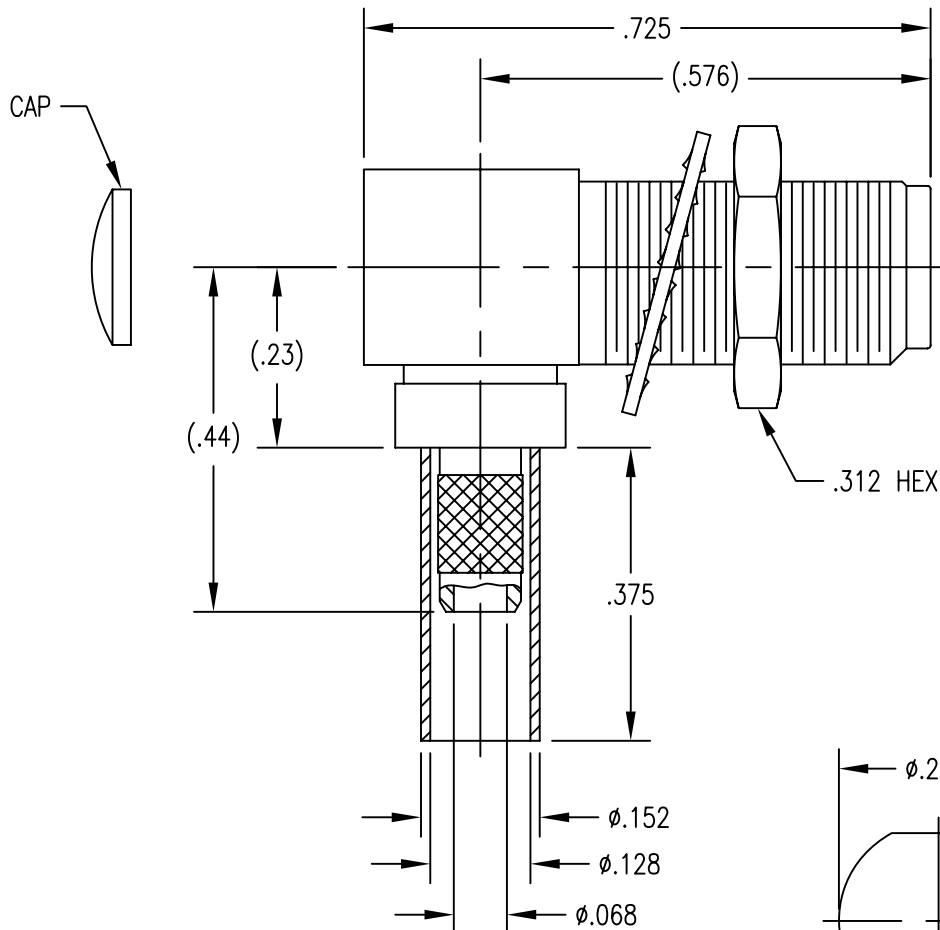

CABLE TRIMMING DIMENSIONS

RECOMMENDED MOUNTING HOLE

CATALOG P/N: 353-975-0630N

NOTES:

- FOR GENERAL SERIES SPECIFICATIONS, SEE SD35-0000.
- MATERIALS:
CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196
LOCKWASHER: PHOSPHOR BRONZE PER ASTM B103
ALL OTHER METAL PARTS: BRASS PER ASTM B16
INSULATOR: TEFLON PER ASTM D1710
- FINISH:
CENTER CONTACT: .000030 MIN. GOLD PER ASTM B488, TYPE II OVER
.000050 MIN. NICKEL PER AMS-QQ-N-290
ALL OTHER METAL PARTS: .000100 MIN. NICKEL PER AMS-QQ-N-290
OVER COPPER FLASH
- DESIGNED FOR USE WITH RG-316 CABLE OR EQUIVALENT.
- FOR CABLING PROCEDURES USE CAP 9-05 WITH TRIMMING DIMENSIONS SHOWN.
- CRIMP FERRULE USING .128 HEX DIE.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMALS .XX ± .01/0.254 XXX ± .005/0.127 ANGLES ± 2° SCALE: 4:1				Winchester Electronics 62 Barnes Industrial Road North Wallingford, CT 06492	
CUSTOMER DRAWING				TITLE SMA RIGHT ANGLE BULKHEAD JACK	
DRAWN JED	DATE 7/20/00	CHECKED DCam	DATE 05/27/09	A SD353-975-0630N	
APPROVED WPM	DATE 05/27/09	APPROVED R.L.	DATE 05/27/09		
				SHT. 1	OF 1
				REV. A	