

WAC LIGHTING

WL-LED130

Step And Wall Light

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Voltage	Color Temp & CRI	Lumens	Finish
WL-LED130 120 VAC	Amber 90 3000K 90	40	BK Black on Aluminum BZ Bronze on Aluminum
WL-LED130F 277 VAC	Amber 90 3000K 90	40	SS Stainless Steel WT White on Aluminum

Example: **WL-LED130-AM-BK**

DESCRIPTION

WAC Lighting Step and Wall Lights are designed to seamlessly blend into any architecture featuring a sleek interchangeable magnetic faceplate with no visible hardware. These luminaires offer enhanced energy-efficient functionality and optimized light output to adequately illuminate stairs, walls and walkways with little or no glare. Light engine is IP66 sealed for both indoor and outdoor applications.

FEATURES


- Diffuse tempered glass provides even illumination
- Magnetized design for easy installation and maintenance
- Low profile, flush to wall aesthetics with no visible hardware
- Can be mounted vertically or horizontally
- 5 year warranty

SPECIFICATIONS


Construction:	Cast 316 marine grade stainless steel, Die-cast corrosion resistant aluminum alloy
Power:	3.5W, 3W
Input:	120 VAC, 50/60Hz, 277 VAC
Dimming:	ELV: 100-10% ,
Light Source:	Integrated LED
Rated Life:	50000 Hours
Mounting:	Fits into 2" x 4" J-Box with minimum inside dimensions of 3"L x 2"W x 2.5"D
Finish:	Stainless Steel:Stainless Steel, Stainless Steel::White on Aluminum, Stainless Steel::Black on Aluminum, Stainless Steel:::Bronze on Aluminum, Enamel Coated:Black on Aluminum, Enamel Coated::Bronze on Aluminum, Enamel Coated:::Stainless Steel, Enamel Coated:::White on Aluminum
Operating Temp:	-40°F to 104°F (-40°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, IP66, Title 24 JA8 Compliant, ADA



FINISHES:

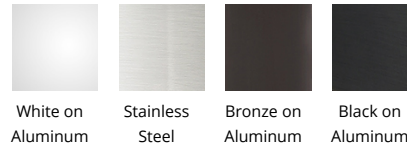

LINE DRAWING:



REPLACEMENT PARTS

- W-4071-130-BK - LED130 Cover Plate BK
- W-4071-130-BZ - LED130 Cover Plate BZ
- W-4071-130-SS - LED130 Cover Plate SS
- W-4071-130-WT - LED130 Cover Plate WT