


ERI-Q10x-Px

Value Express NVR

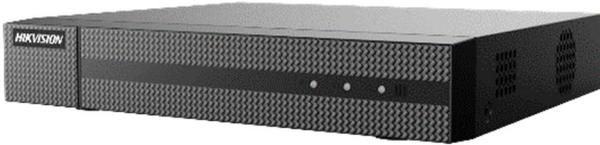

- Up to 4 MP Resolution Recording
- Up to 4 or 8 Cameras can be Connected
- H.265+/H.265/H.264+/H.264/MPEG Compression
- Plug and Play with up to 4 or 8 Independent PoE Cameras
- Up to 4 or 8 PoE Network Connections
- One SATA Interface
- Up to 6 TB Hard Drive Capacity

Value Express ERI-Q10x-Px NVRs feature a video output of up to 1080p. They offer full channel recording at up to 4 MP and feature H.265+ compression technology, which improves recording efficiency and reduces data storage costs.

Plug and Play technology supports up to 4 or 8 Independent PoE cameras, depending on the model.

Additionally, ERI-Q10x-Px NVRs support basic analytics such as Smart Search and Smart Playback, and are equipped with basic line crossing and intrusion detection capabilities.

Available models:

ERI-Q104-P4


ERI-Q108-P8

Specifications

| | ERI-Q104-P4 | ERI-Q108-P8 |
|-----------------------------------|--|---|
| Video Input | | |
| IP Video Input | 4-ch Up to 4 MP resolution | 8-ch |
| Network | | |
| Incoming Bandwidth | 40 Mbps | 60 Mbps |
| Outgoing Bandwidth | 60 Mbps | |
| Video Output | | |
| Recording Resolution | 4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF | |
| HDMI/VGA Output Resolution | 1920 x 1080p, 1280 x 1024, 1280 x 720, 1024 x 768 | |
| Decoding | | |
| Decoding Format | H.265+/H.265/H.264+/H.264 | |
| Live View/Playback Resolution | 4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF | |
| Synchronous Playback | 4-ch | 8-ch |
| Capability | 1-ch @ 4 MP/2-ch @ 1080p | |
| Network Management | | |
| Network Protocols | TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, UPnP™ | |
| Hard Disk | | |
| SATA | 1 SATA interface | |
| Capacity | Up to 6 GB capacity for each disk | |
| External Interface | | |
| Network Interface | 1-port RJ-45 10M/100M self-adaptive Ethernet port | |
| USB Interface | 2 x USB 2.0 | |
| PoE Interface | | |
| Interface | 4-port RJ-45 10/100 Mbps self-adaptive Ethernet interface | 8-port RJ-45 10/100 Mbps self-adaptive Ethernet interface |
| Power | ≤36 W | ≤75 W |
| Standard | IEEE 802.3 af/at | |
| General | | |
| Power Supply | 48 VDC | |
| Power | ≤50 W | ≤90 W |
| Consumption (without HDD and PoE) | ≤10 W | |
| Working Temperature | 14° F to 131° F (10° C to 55° C) | |
| Working Humidity | 10 to 90% | |
| Chassis | 1U chassis | |
| Dimensions (W x D x H) | 10.2" x 8.9" x 1.9" (260 mm x 225 mm x 48 mm) | |
| Weight (without HDD) | 2.2 lbs (1.0 kg) | |

Physical Interfaces

ERI-Q108-P8

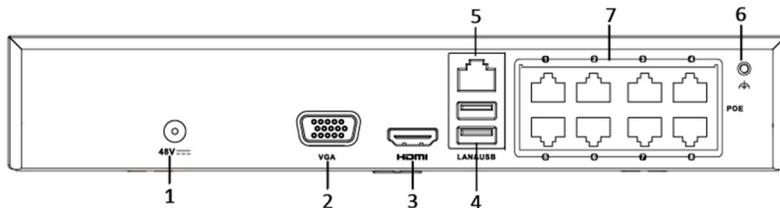

| | |
|-------------------|---|
| 1. Power Supply | 5. LAN Network Interface |
| 2. VGA Interface | 6. GND |
| 3. HDMI Interface | 7. Network Interfaces with PoE Function |
| 4. USB Interface | |

Note: The ERI-Q104-P4 has 4 network interfaces with PoE function.