


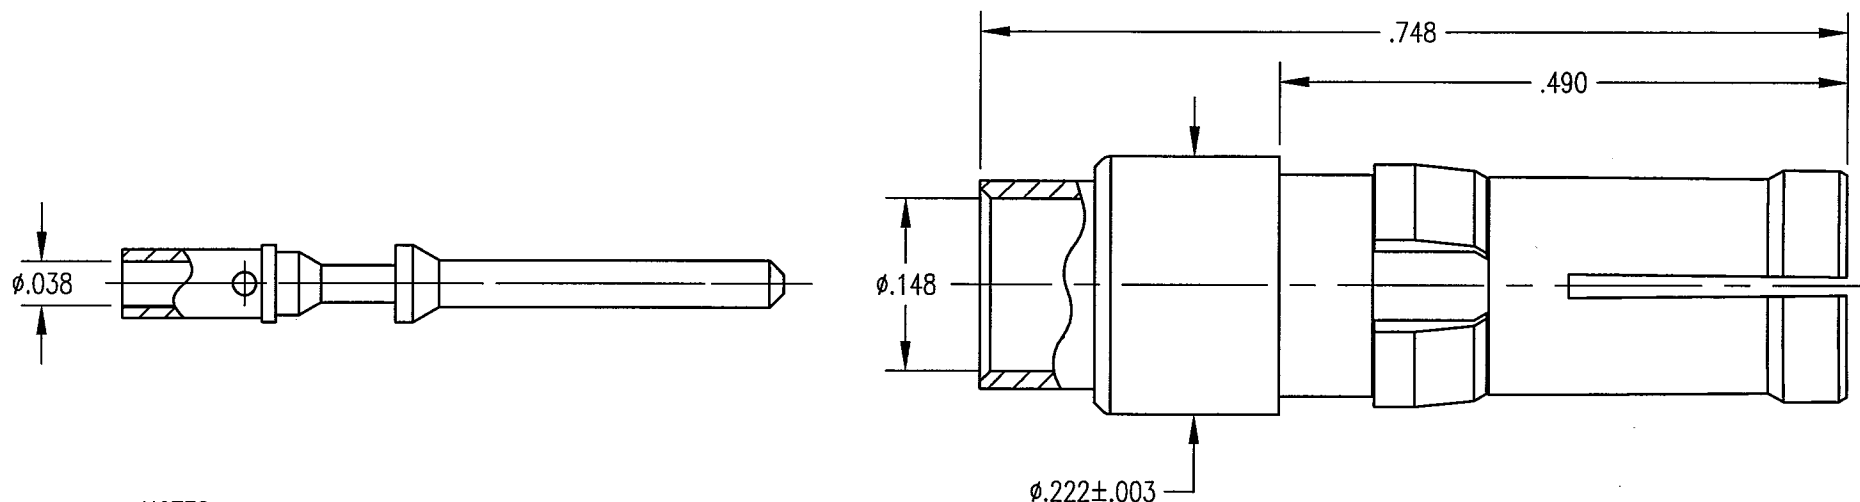

NOTES:

1. MATERIAL:

CLIP RING: BERYLLIUM COPPER PER ASTM B194
FRONT BODY: BERYLLIUM COPPER PER ASTM B196
CENTER CONTACT & REAR BODY: BRASS PER ASTM B16
INSULATOR: TEFLON PER ASTM D1710

2. FINISH:


OUTER & CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
REAR BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
CLIP RING: .000100 MIN. NICKEL PER QQ-N-290 OVER
COPPER FLASH

3. ELECTRICAL:

DIELECTRIC WITHSTANDING VOLTAGE: 800 VRMS
RECOMMENDED FREQUENCY RANGE: 0 - 3.0 GHz.

4. FOR USE WITH .141 DIA. SEMI-RIGID CABLE.

.188 JACKET
IF JACKETED CABLE

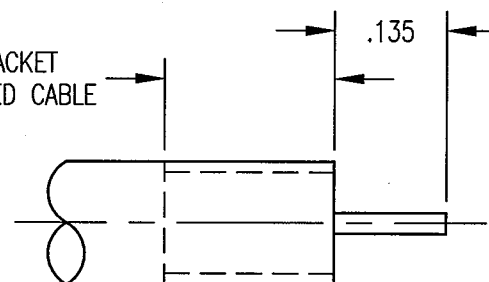

STRIPPING DIMENSIONS

EFFECTIVE FEBRUARY 19, 1999 THIS
DRAWING BECAME THE PROPERTY
OF WINCHESTER ELECTRONICS DIV.
400 PARK RD., WATERTOWN, CT 06795
LITTON SYSTEMS, INCORPORATED.

UNLESS OTHERWISE SPECIFIED
TOLERANCES: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.010
FRACTIONS ±1/64 ANGLE ±2°
ALL DIMENSIONS PRIOR TO PLATING
CHAMFER 1ST THREAD 45° TO ROOT DIAMETER
REMOVE ALL BURRS AND SHARP EDGES
ALL DIAMETERS TO BE CONCENTRIC WITHIN .003 TIR
SURFACE FINISH SHALL BE 63 MICROINCHES MAXIMUM
DIMENSIONS IN INCHES DO NOT SCALE PRINT



RETCONN

A SUBSIDIARY OF SPM
199 W. PEARL ROAD TORRINGTON, CT. 06790
TEL. (860) 489-1220 FAX (860) 496-7307

TITLE

RDM STRAIGHT RECEPTACLE

DRAWN JED	DATE 1/22/98	CHECKED PRP	SCALE 6:1	FSCM ODWJ4
APPR. JMC	DWG. NO. 311-510-1410G	REV. D		

REV.	DESCRIPTION OF CHANGE	DATE	DRN	APPR
D	ECN 2052	7/10/98	JMC	237
C	NPR 694	1/22/98	JED	JMC
REVISIONS				

MATERIAL
FINISH

THIS INFORMATION IS PROPRIETARY AND CONFIDENTIAL. IT IS DISCLOSED TO YOU ON
CONDITION NO FURTHER DISCLOSURE IS MADE TO OTHER THAN RETCONN PERSONNEL
WITHOUT WRITTEN AUTHORIZATION FROM RETCONN INC., TORRINGTON, CT.