



SDSA Stanchion Mount

HIGHLIGHTS


- Variety of heights from 12" to 48" (in 6" increments)
- Designed to have a single lighting fixtures placed atop
- A front splice access cover and gasket provided for fixture wiring compartment



Specifications

Length:	6-1/2"
	165 mm
Width:	6-1/2"
	165 mm
Height:	18"
	457 mm

DIMENSIONS

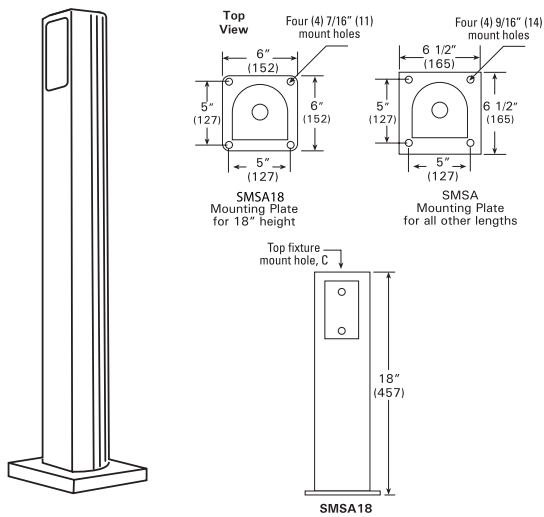

ORDERING INFORMATION

EXAMPLE: SMSA18 12C BZ

Model	Fixture Mounting ¹	Cord Seal	Option	Finish
SMSA12 12" Stanchion Mount	12C Accepts 1/2" NPT threaded knuckle	12CS 1/2" cord seal used with 4750L	12DMX Note: 12DMX is required with RGB or RGBW fixture.	BL Black
SMSA18 18" Stanchion Mount	78C 7/8" thru hole for 1/2" NPT			BZ Bronze
SMSA24 24" Stanchion Mount	109C 1.09" thru hole for 3/4" NPT			DDB Dark Bronze
SMSA30 30" Stanchion Mount	LSC ² Large Stainless Cord Seal			DNA Natural Aluminum
SMSA36 36" Stanchion Mount	SC ³ Stainless Cord Seal			GN Green
SMSA42 42" Stanchion Mount	TC 2 3/8" Tenon Mount			GR Gray
SMSA48 48" Stanchion Mount	38TL Taper Lock			SND Sand
	78ADP Accepts 4750L Knuckle Adaptor			STG Steel Gray
				TVG Terra Verde Green
				WH White
				CF Custom
				_Z ⁴ Zinc Undercoat (i.e. BLZ)
				RALTBD RAL Paint Finishes
				Note: RALTBD for pricing only, replace with applicable RAL call out when ready to order. See the RALBROCHURE for available options. It is recommended only use textured paint for Hydrel fixtures.

Notes:

- See individual fixture sheets for mounting.
- LSC available for large yoke mounted fixtures (e.g. Hydrel Series 8200).
- SC available for small yoke mounted fixtures (e.g. Hydrel Series 4600YM, 8100).
- Add Zinc undercoat for harsh environments.

MOUNTING OPTIONS

Fixture Mounting	Size	Fixture that uses this mounting ¹ :
12C	1/2" NPT	4600 KM
78C	7/8" thru hole	Cedar, Aspen, Palm, Pine, Alder
LSC	Large Cord Seal	8200 YM
SC or SCM	Cord Seal	4600 YM, 8100 YM
TC	2 3/8" tenon	8100 & 8200 YMTM mounting
38TL	3/8" taper lock	TPS1, TPS2
78ADP		accepts 4750L Knuckle Adaptor

Notes:

- Not all fixtures on this chart are available with all accessories, consult the fixture mounting column to see which options are available on this mounting.

SPECIFICATIONS AND FEATURES

MATERIAL: Heavy wall cast aluminum (SMSA18) or extruded aluminum.

MOUNTING: Stanchion mounts over recessed splice box or conduit stub-out. Attaches to surface with four (4) fasteners (maximum size: 3/8" bolts by others). Top mounting hole accepts threaded knuckle mount fixture or yoke mount fasteners. 2 3/8" tenon mount also available.

ELECTRICAL: Front splice access cover and gasket provided for fixture wiring compartment.

FASTENERS: Stainless steel.

FINISH: Super durable Polyester TGIC powder coat finish (standard). Optional Zinc undercoat for harsh environments.

BUY AMERICAN ACT: This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations. Please refer to www.acuitybrands.com/resources/buy-american for additional information.

WARRANTY: 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.