2 This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of REV. **DESCRIPTION** TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited **ORIGINAL ISSUE** without the prior written consent of TRU Corporation. **CHANGED PER ECO-2173** Α CHANGED PER ECO-2968 CHANGED PER ECO-4522 \emptyset 3.50) 1-5/8 EIA- \emptyset 1.75) **ENGINEERING DATA MECHANICAL:** INTERFACE: 1-5/8 EIA per EIA STD RS-225 & MIL-DTL-24044 WITH FIXED FLANGE & REMOVABLE BULLET SC(f) per MIL-STD-348 FIG. 309.2 **ELECTRICAL:** IMPEDANCE: 50 OHMS NOM

MATERIAL:

CONTACTS: BRASS & BERYLLIUM COPPER


INSULATORS: PTFE **BODIES: BRASS** O-RING: NEOPRENE

FINISH:

CONTACTS: SILVER PLATED BODIES: NICKEL PLATED

NOTES:

- 1. UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- SUPPLIED WITH THE FOLLOWING ITEMS:
 - QTY 4 5/16-18 X 1.50 HEX HEAD BOLT
 - QTY 4 5/16-18 HEX NUT
 - QTY 8 5/16 LOCKWASHER
 - QTY 1 O-RING

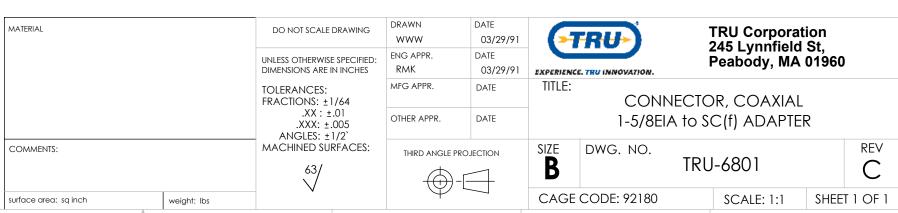

REMOVABLE BULLET 4.96

5

3

APPROVED

RMK

DA

DA

AM

SC(f)

DATE

03/29/91

03/21/03

10/16/06

08/25/14