

Project:

Item Number:

Quantity:

BRIO DISPLAY CABINETS

DESCRIPTION

Stoelting's display cabinets are engineered with curved front glass for a stylish design and easy viewing.

ITEMS

- CD-BR44-37-WP** Holds 6 - 5 Liter pans, white panels (Brio 4+4)
- CD-BR06-37-WP** Holds 6 - 5 Liter pans, white panels (Brio 6)
- CD-BR66-37-WP** Holds 8 - 5 Liter pans, white panels (Brio 6+6)
- CD-BR07-37-WP** Holds 7 - 5 Liter pans, white panels (Brio 7)
- CD-BR77-37-WP** Holds 10 - 5 Liter pans, white panels (Brio 7+7)
- CD-BR09-37-WP** Holds 9 - 5 Liter pans, white panels (Brio 9)

ACCESSORIES & OPTIONS

- TG14154** Gelato Pan - 4.25 liter stainless steel
- TG1415-C** Gelato Pan Cover - 4.25 liter polycarbonate
- TG36165** Gelato Pan - 5 liter stainless steel
- TG3616-C** Gelato Pan Cover - 5 liter polycarbonate
- 521028** - 19" Dipper well with dividers and install kit
- Red Panels (RP suffix)** Red colored panels available at a premium. To order, replace the WP suffix with RP.

FEATURES

- Forced air cooling
- Automatic hot gas defrost
- Curved front glass
- Sizes available from 6 five-liter pans up to 10 five-liter pans
- Standard casters
- Compact size for smaller spaces
- One-piece shell with 60 mm-thick polyurethane insulation
- LED lighting
- Glass superstructure with service side
- Plexiglass flap closure
- Ventilated refrigeration, automatic defrost
- Electronic control panel for temperature adjustment
- Climate class 4 (30° / 55% RH)



Every machine includes Stoelting's White Glove Service. One call does it all – customer service, technical service, parts or warranty information, installation, startup, sales, on-site service dispatch and much more. Available 24 hours a day, seven days a week year-round.

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.


Approvals

Date


--	--

BRIO DISPLAY CABINETS




DIMENSIONS

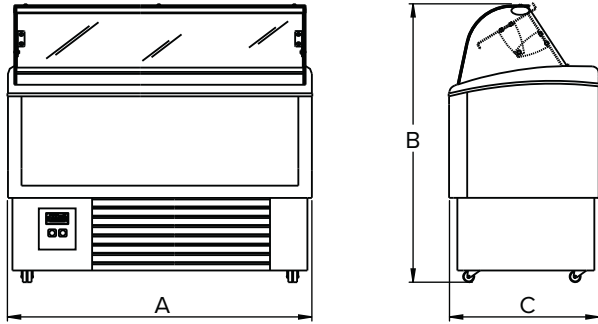


CD-BR44-37-WP




CD-BR06-37-WP




CD-BR66-37-WP








CD-BR07-37-WP



CD-BR77-37-WP



CD-BR09-37-WP



Drawings show gelato pan layouts with both 4,25 liter and 5 liter pans

GENERAL SPECIFICATIONS

Model	Capacity 4.25 Liter Pans	Capacity 5 Liter Pans	Volts	Phase	Hz	Rated Capacity Watts	Dimensions - in (cm)			Weight lb (kg)	Crated Weight lb (kg)
							(A) Width	(B) Height	(C) Depth		
CD-BR44-37-WP	8	6	115	1	60	680	33.5 (85.1)	48.2 (122.4)	30.4 (77.2)	200 (90.7)	285 (129.3)
CD-BR06-37-WP	10	6	115	1	60	690	46.6 (118.4)	48.2 (122.4)	26.2 (66.5)	225 (102.1)	310 (140.6)
CD-BR66-37-WP	12	8	115	1	60	690	46.6 (118.4)	48.2 (122.4)	30.4 (77.2)	254 (115.2)	255 (115.7)
CD-BR07-37-WP	11	7	115	1	60	700	53.1 (134.9)	48.2 (122.4)	26.2 (66.5)	247 (112)	330 (149.7)
CD-BR77-37-WP	14	10	115	1	60	700	53.1 (134.9)	48.2 (122.4)	30.4 (77.2)	291 (132)	380 (172.4)
CD-BR09-37-WP	14	9	115	1	60	708	65.3 (165.9)	48.2 (122.4)	26.2 (66.5)	280 (127)	370 (167.8)

- Indoor use only.
- Maximum ambient temperature: 100°F (37.8°C).
- Requires a dedicated electrical circuit.



Service Information
 800-319-9549 (U.S. Toll Free)
 920-894-2293 (Outside the U.S.)
 www.stoeltingfoodservice.com
 www.vollrath.com