
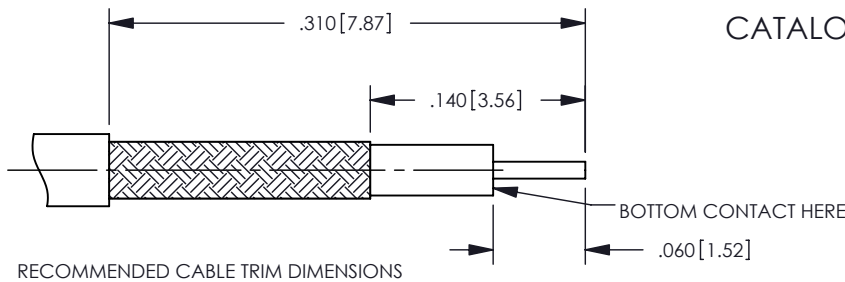


NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD47-0000.
2. MATERIAL SPECIFICATIONS:
ALL METAL PARTS: COPPER ALLOY
INSULATOR: TEFLON PER ASTM D1710
3. FINISH SPECIFICATIONS:
ALL METAL PARTS: GOLD PER ASTM B488 OVER COPPER PER ASTM B734.
4. ELECTRICAL SPECIFICATIONS:
FREQUENCY RANGE: DC-6GHz
NON-MAGNETIC
5. CONTACT AND FERRULE SHIPPED LOOSE.
6. DESIGNED FOR USE WITH RG178 CABLE OR EQUIVALENT.
7. CRIMP FERRULE USING .105 HEX CRIMP DIE.
8. FOR CABLING PROCEDURE, SEE CAP 9-17 WITH TRIM DIMENSIONS SHOWN BELOW

REV	DESCRIPTION	BY DATE	APPD
B	ECR-ER3337	FSM 07/10/07	DCam

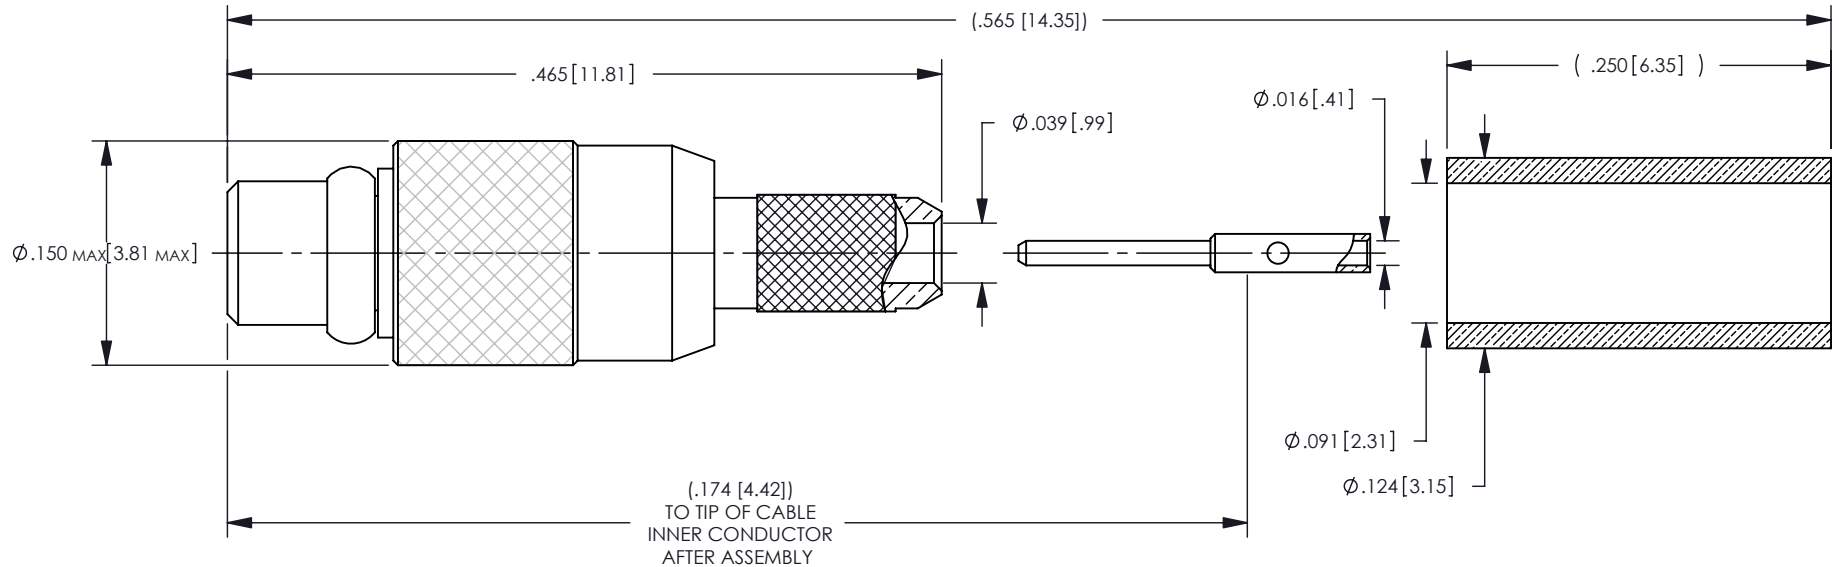

CATALOG P/N: 470-900-0360J

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX ± .01 [0.3] .XXX ± .005 [0.13] .XXXX ± .XXXX ANGLES: ± 2° SCALE: 8:1				 Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER DRAWING				MMCX STRAIGHT PLUG FOR RG178 CABLE	
DRAWN FSM	DATE 11/05/06	APPROVED DCam	DATE 11/09/06	A SD470-900-0360J SHT 1 OF 1 REV B	
APPROVED M.A.YUB	DATE 11/09/06	APPROVED WPM	DATE 11/09/06		