

FEATURES & SPECIFICATIONS

INTENDED USE

For use with housings L7X, L7XR, LC6, LCP, L7XP, L7XPR, L7XF and L7XFR.

CONSTRUCTION

Aluminum white sphere.

Polyester powder coat paint.

25 degree vertical tilt standard.

Antique bronze, oil-rubbed bronze, brushed nickel and white finishes are one piece aluminum reflector with integral flange.

INSTALLATION

Socket-to-trim interface.

Trim retention is achieved by utilizing two side-mounted torsion springs on the trim and two receiving brackets in the can, ensuring a consistently tight fit with the ceiling.

LISTINGS

U.L. Listed to U.S. and Canadian safety standards.

Damp location listed.

WARRANTY

1-year limited warranty. Complete warranty terms located at

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Actual performance may differ as a result of end-user environment and application.


Note: Specifications subject to change without notice.

Catalog Number
Notes
Type

6" Full Reflector Trim

7E1

STANDARD EYEBALL
Wide Flange

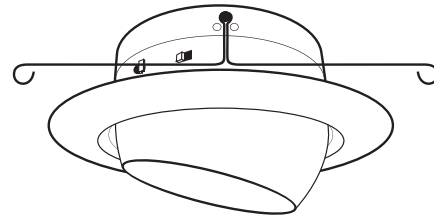


Specifications

Height: 4 (10.2)

Lamp opening: 4-7/8 (12.4)

Diameter: 7-5/8 (19.4)

All dimensions are inches (centimeters) unless otherwise indicated.



ORDERING INFORMATION

All configurations of this product are considered "standard" and have short lead times.

Example: 7E1 TOR

7E1		TOR
Series	Finish	Mounting method
7E1	(blank) White eyeball MW Matte white BN Brushed nickel ORB Oil-rubbed bronze BZA Antique bronze	TOR Torsion springs

Accessories: Order as separate catalog number.	
CRT6	6" goof ring, white

Housing Compatibility: Housing and trim ordered separately.			
Application	Source	Maximum wattage	Housing
IC	Incandescent	75 PAR30	L7X, L7XR, LC6, LCP, L7XP, L7XPR, L7XF
		65 BR30	
	Fluorescent	18TRT	L7XF, L7XFR

7E1 6" Standard Eyeball Full Reflector Trim

For BR and PAR reflector lamps, see lamp manufacturer's published raw lamp data for photometrics.