



WALL MOUNT ASSEMBLY

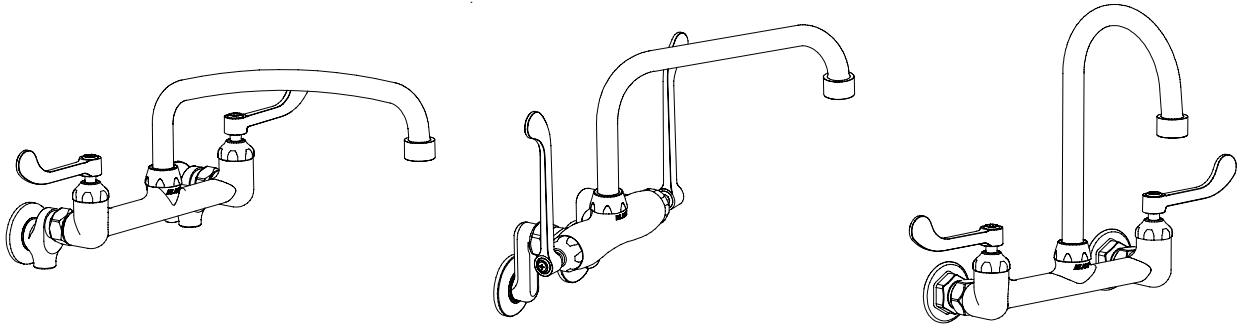

General Instructions

- Turn off the water supply at the main source.
- Hand tighten all parts prior to tightening with wrench. Do not force parts together.
- Handle plated surfaces with care, being careful not to scratch with tools.
- Wall mount faucets have a 1/2" I.P.S. female flanged inlet.
- For easier assembly, you may purchase as an accessory, the LKMK462 mounting kit (see Figure 2).

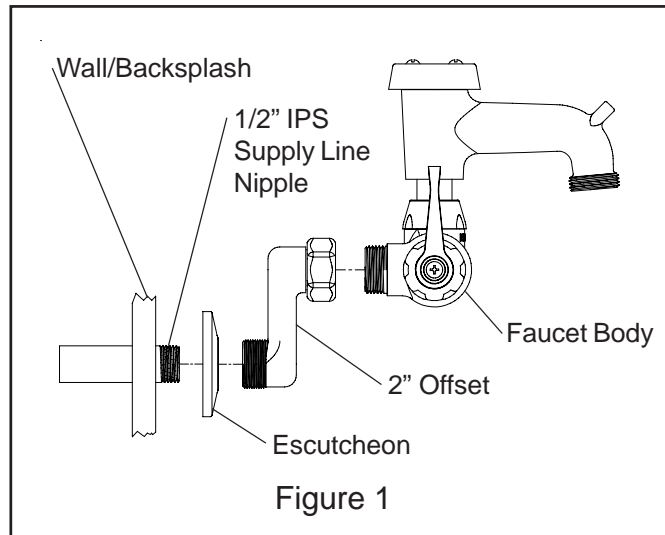

Assemble Faucet to Backsplash

1. Apply teflon tape or pipe joint compound to supply line nipples.
2. Place nipples through holes in backsplash.
3. Assemble each flanged inlet to one nipple, then the other.
4. Using the optional LKMK462, apply in order behind the back-splash: rubber washer, washer, lock nut and elbow (see Figure 2).
5. Thread flanged inlet loosely against wall or backsplash.
6. Carefully orient, mount and hand tighten the faucet to the two flanges. Be sure to include the washers provided.
7. Use wrench to tighten flange against backsplash. (Maintain alignment of faucet or spout to sink while tightening).
8. Wrench tighten flanges to faucet body.
9. Make sure drain is attached and turn on water supply - being sure to check for leaks. Wrench tighten where needed.

