

Project _	
Item#_	
Quantity	



Commercial Countertop Gas Griddles, Natural / LP

Models: NGGD-12M / NGGD-24M / NGGD-36M / NGGD-48M

Spectrum griddles are designed with durable stainless steel construction and cool-touch front plate rail that runs the full length. Available in 4 widths, these units are equipped with infinite heat controls, high-performance burners, and removable grease drawer.

Standard Features

- ♦ Heavy-duty 3/4" thick x 20-1/2" deep polished steel griddle plate
- ♦ Independent infinite heat control valves every 12" section
- ◆ Available in 12", 24", 36" and 48" widths
- Heavy duty brushed cast zinc knobs
- 30,000 BTU U-shaped burners every 12" section provide even heat distribution
- Heavy-duty all-welded body construction with stainless steel front, bull nose and 3-1/2" high tapered splash guard
- Cool-touch stainless steel front rail provides knob protection for a safe, comfortable work zone
- 3-1/4" spatula width grease trough and grease chute for easy cleaning
- ◆ Large 4-1/2 quart stainless steel grease drawer
- Ships Natural Gas ready with LP conversion kit and reversible regulator, 3/4" NPT rear gas connection
- Heavy-duty 4" adjustable legs
- One year parts and labor warranty

Options & Accessories

Oplions	Ophons & Accessones							
SCRP-14	16" Heavy-duty Aluminum Grill Scraper							
SCRP-16	16" Aluminum Grill Scraper							
SCRP-12	12" Aluminum Grill Scraper							
GSH-1	Griddle Screen Holder							
GSN-4	Grill Screen, fits with GSH-1							
GBH-2	Griddle Brick Holder							
GBK-348	Grill Brick, fits with GBH-2							
SWA-5	1 lb Cast Aluminum Steak Weight							
SWA-2	2 lb Cast Iron Steak Weight							
SWA-9	2.5 lb Cast Iron Steak Weight							
SWS-6	6" Smashed Burger Press							

















NGGD-Series-M

For California Customers

A

WARNING: Cancer and Reproductive Harm - <u>www.P65Warnings.ca.gov</u>


Winco®

www.wincous.com



[®] Gas Griddles

Models: NGGD-12M / NGGD-24M / NGGD-36M / NGGD-48M

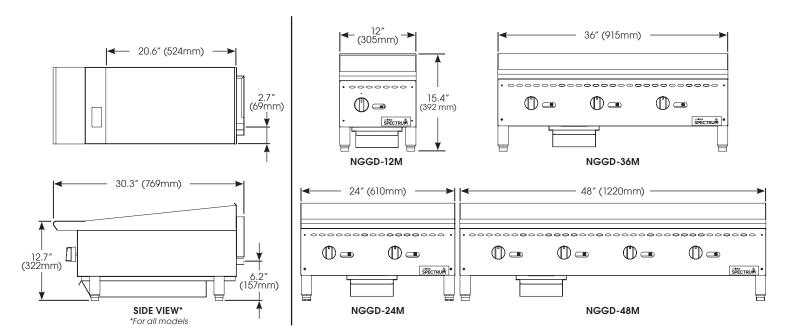

Specifications

MODEL	DESCRIPTION	# OF BURNERS	TOTAL BTU	UNIT DIMENSIONS	UNIT WEIGHT	SHIPPING DIMENSIONS	SHIP WEIGHT
NGGD-12M	Spectrum Gas Griddles	1	30,000	12" x 30.3" x 15.4" (305 x 769 x 392 mm)	99 lbs (45 kg)	15.75" x 33.5" x 19.25" (400 x 850 x 490 mm)	125 lbs (57 kg)
NGGD-24M		2	60,000	24" x 30.3" x 15.4" (610 x 769 x 392 mm)	151 lbs (69 kg)	27.6" x 33.5" x 19.25" (700 x 850 x 490 mm)	203 lbs (92 kg)
NGGD-36M		3	90,000	36" x 30.3" x 15.4" (915 x 769 x 392 mm)	220 lbs (100 kg)	39.4" x 33.5" x 19.3" (1000 x 850 x 490 mm)	284 lbs (129 kg)
NGGD-48M		4	120,000	48" x 30.3" x 15.4" (1220 x 769 x 392 mm)	284 lbs (129 kg)	51.2" x 33.5" x 19.3" (1300 x 850 x 490 mm)	360 lbs (163 kg)

Gas Requirements and Information

- Natural or LP gas main supply required
- 3/4" NPT male connection, all units supplied with natural gas and convertible LP gas regulator

THESE UNITS ARE SUITABLE FOR INSTALLATION ON NON-COMBUSTIBLE SURFACE(S) ONLY.

Combustible clearances: 6" sides (152mm) / 6" rear (152mm) / 4" floor (102mm)

Noncombustible clearances: 0" sides (0mm) / 6" rear (152mm) / 4" floor (102mm)

Product Specs Gas Griddles

The Gas Griddle models NGGD-12M / NGGD-24M / NGGD-36M / NGGD-48M as manufactured by Winco*, Lodi, NJ 07644.

The Gas Griddle models shall be rated 30,000 BTU every 12" section U-shaped burner providing even heat distribution. Units shall be constructed with heavy-duty 3/4" thick $x \cdot 20-1/2"$ deep polished steel griddle plate, independent infinite heat control valves every 12" section, heavy duty brushed cast zinc knobs, heavy-duty all-welded body construction with stainless steel front, bull nose and 3-1/2" high tapered splash guard, and heavy-duty 4" adjustable legs. Cool-touch stainless steel front rail provides knob protection for a safe, comfortable work zone. The 3-1/4" spatula width grease trough and grease chute allows for easy cleaning and a large 4-1/2 quart stainless steel grease drawer. Ships Natural Gas ready with LP conversion kit and reversible regulator, 3/4" NPT rear gas connection.

Not to be used on casters.

CSA listed for commercial and indoor use.

Warranty consists of one year parts and labor.

Winco® www.wincous.com