



PULL OUT & PULL DOWN KITCHEN FAUCETS INSTALLATION INSTRUCTIONS

CARE INSTRUCTIONS

To clean, wipe gently with a soft, damp cloth, then wipe dry. To ensure long lasting luster, harsh abrasives or polishes should be avoided. Your specific model may vary.



INSTALLATION INSTRUCTIONS


Before beginning the installation, determine your needs, and if necessary consult the store where you purchased your faucet for valve and adapter recommendations.

BEFORE STARTING THE PROJECT, SHUT OFF HOT AND COLD WATER SUPPLIES.
If you are removing an existing faucet, remove the faucet from the sink and clean sink thoroughly.

STEP A: FAUCET INSTALLATION

SINGLE HOLE SINK (Without escutcheon)

1. Set the faucet into the sink hole.
2. From underneath the sink, first, slide the mounting gasket, second, slide the metal mounting washer and finally, the seat nut (with screws facing downward) up the hoses to the threaded shank. Thread the nut up to the sink. Do not tighten down the screws until the faucet is aligned properly. The faucet is aligned properly when the spout travels the same distance, side to side. Once it is aligned, tighten the seat nut screws.

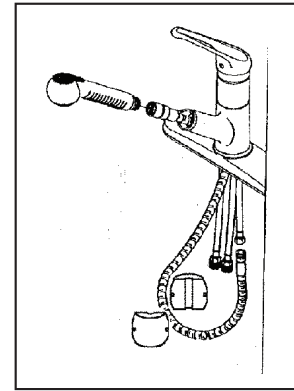


STEP B: CONNECTING THE SPRAY HOSE

From beneath the sink, connect the hose to the short tube's end fitting. Tighten the screw on the connector, be sure to secure the end of the tube from twisting while tightening, assemble the two halves of the balance weight onto the spray hose (see picture for placement location). Pull spray hose back and forth to check for smooth operation. Attached pull-out spray head to hose. Be sure included washer is inside hose.

STEP C: CONNECTING THE SPRAY TUBES

Hot supply tube is indicated with a red mark. Attach water supply lines (sold separately) to faucet lines and valves. Use a wrench to hold the copper faucet lines in place when tightening supply lines. This will help prevent twisting and kinking. Tighten firmly (careful not to over-tighten) until a seal is achieved.



STEP D: FLUSH AND CHECK FOR LEAKS

Turn on hot and cold water supplies; check for leaks. Remove the pull-out spray head from the house. Point the hose into the drain and turn on the faucet, hot and cold mixture, for 1 minute. Re-attach the spray head to hose. Run water again and check all connection for leaks.

Limited Lifetime Warranty:

Your Jones Stephens faucet has been designed and manufactured to high quality standards and therefore we warranty it against defects in material or workmanship for as long as it is owned by the original purchaser. Jones Stephens will provide repair parts or replace any faucet which proves defective due to materials or workmanship. Please have a copy of your purchase receipt along with the model number. Contact us at Jones Stephens, 3249 Moody Parkway, Moody, AL 35004 or 1.800.355.6637 or at customerservice@jonesstephens.com.

This Warranty Will Be Void Due To:

- (a) Defects or malfunctions caused by failure to properly install, operate or maintain the unit in accordance with these printed instructions;
- (b) Failures resulting from abuse, accident, or negligence;
- (c) Units which are not installed in accordance with ordinances and good trade practices;
- (d) If unit is used for purposes other than for what it was designed and manufactured;
- (e) Finish or plating is damaged due to incorrect cleaning with abrasive cleansers;
- (f) Contaminants in the water such as chemicals or sediment.

Products Improvements:

Jones Stephens reserves the right to make periodic improvements and updates to its products or to components of its products without being obliged to replace or update products made and shipped prior to the changes.

Warranty Exclusions:

THERE WILL BE NO WARRANTIES INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.

Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. No warranties or representations at any time made by any representative of Jones Stephens shall vary or expand the provision hereof.

Liability Limitation:

IN NO EVENT SHALL JONES STEPHENS BE LIABLE OR RESPONSIBLE FOR CONSEQUENTIAL, INCIDENTAL OR SPECIAL DAMAGES RESULTING FROM OR RELATED IN ANY MANNER TO ANY JONES STEPHENS PRODUCT OR PARTS THEREOF.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This Warranty gives you specific legal rights and you may also have other rights which vary from state to state.

All Jones Stephens faucets are tested before they leave the factory. As a result, we are not responsible for damages as a result of improper installation.

Manufactured for:

Jones Stephens Corp.

3249 Moody Parkway, Moody, AL 35004